




COB Model

Small Pitch Cabinet Full Front Service

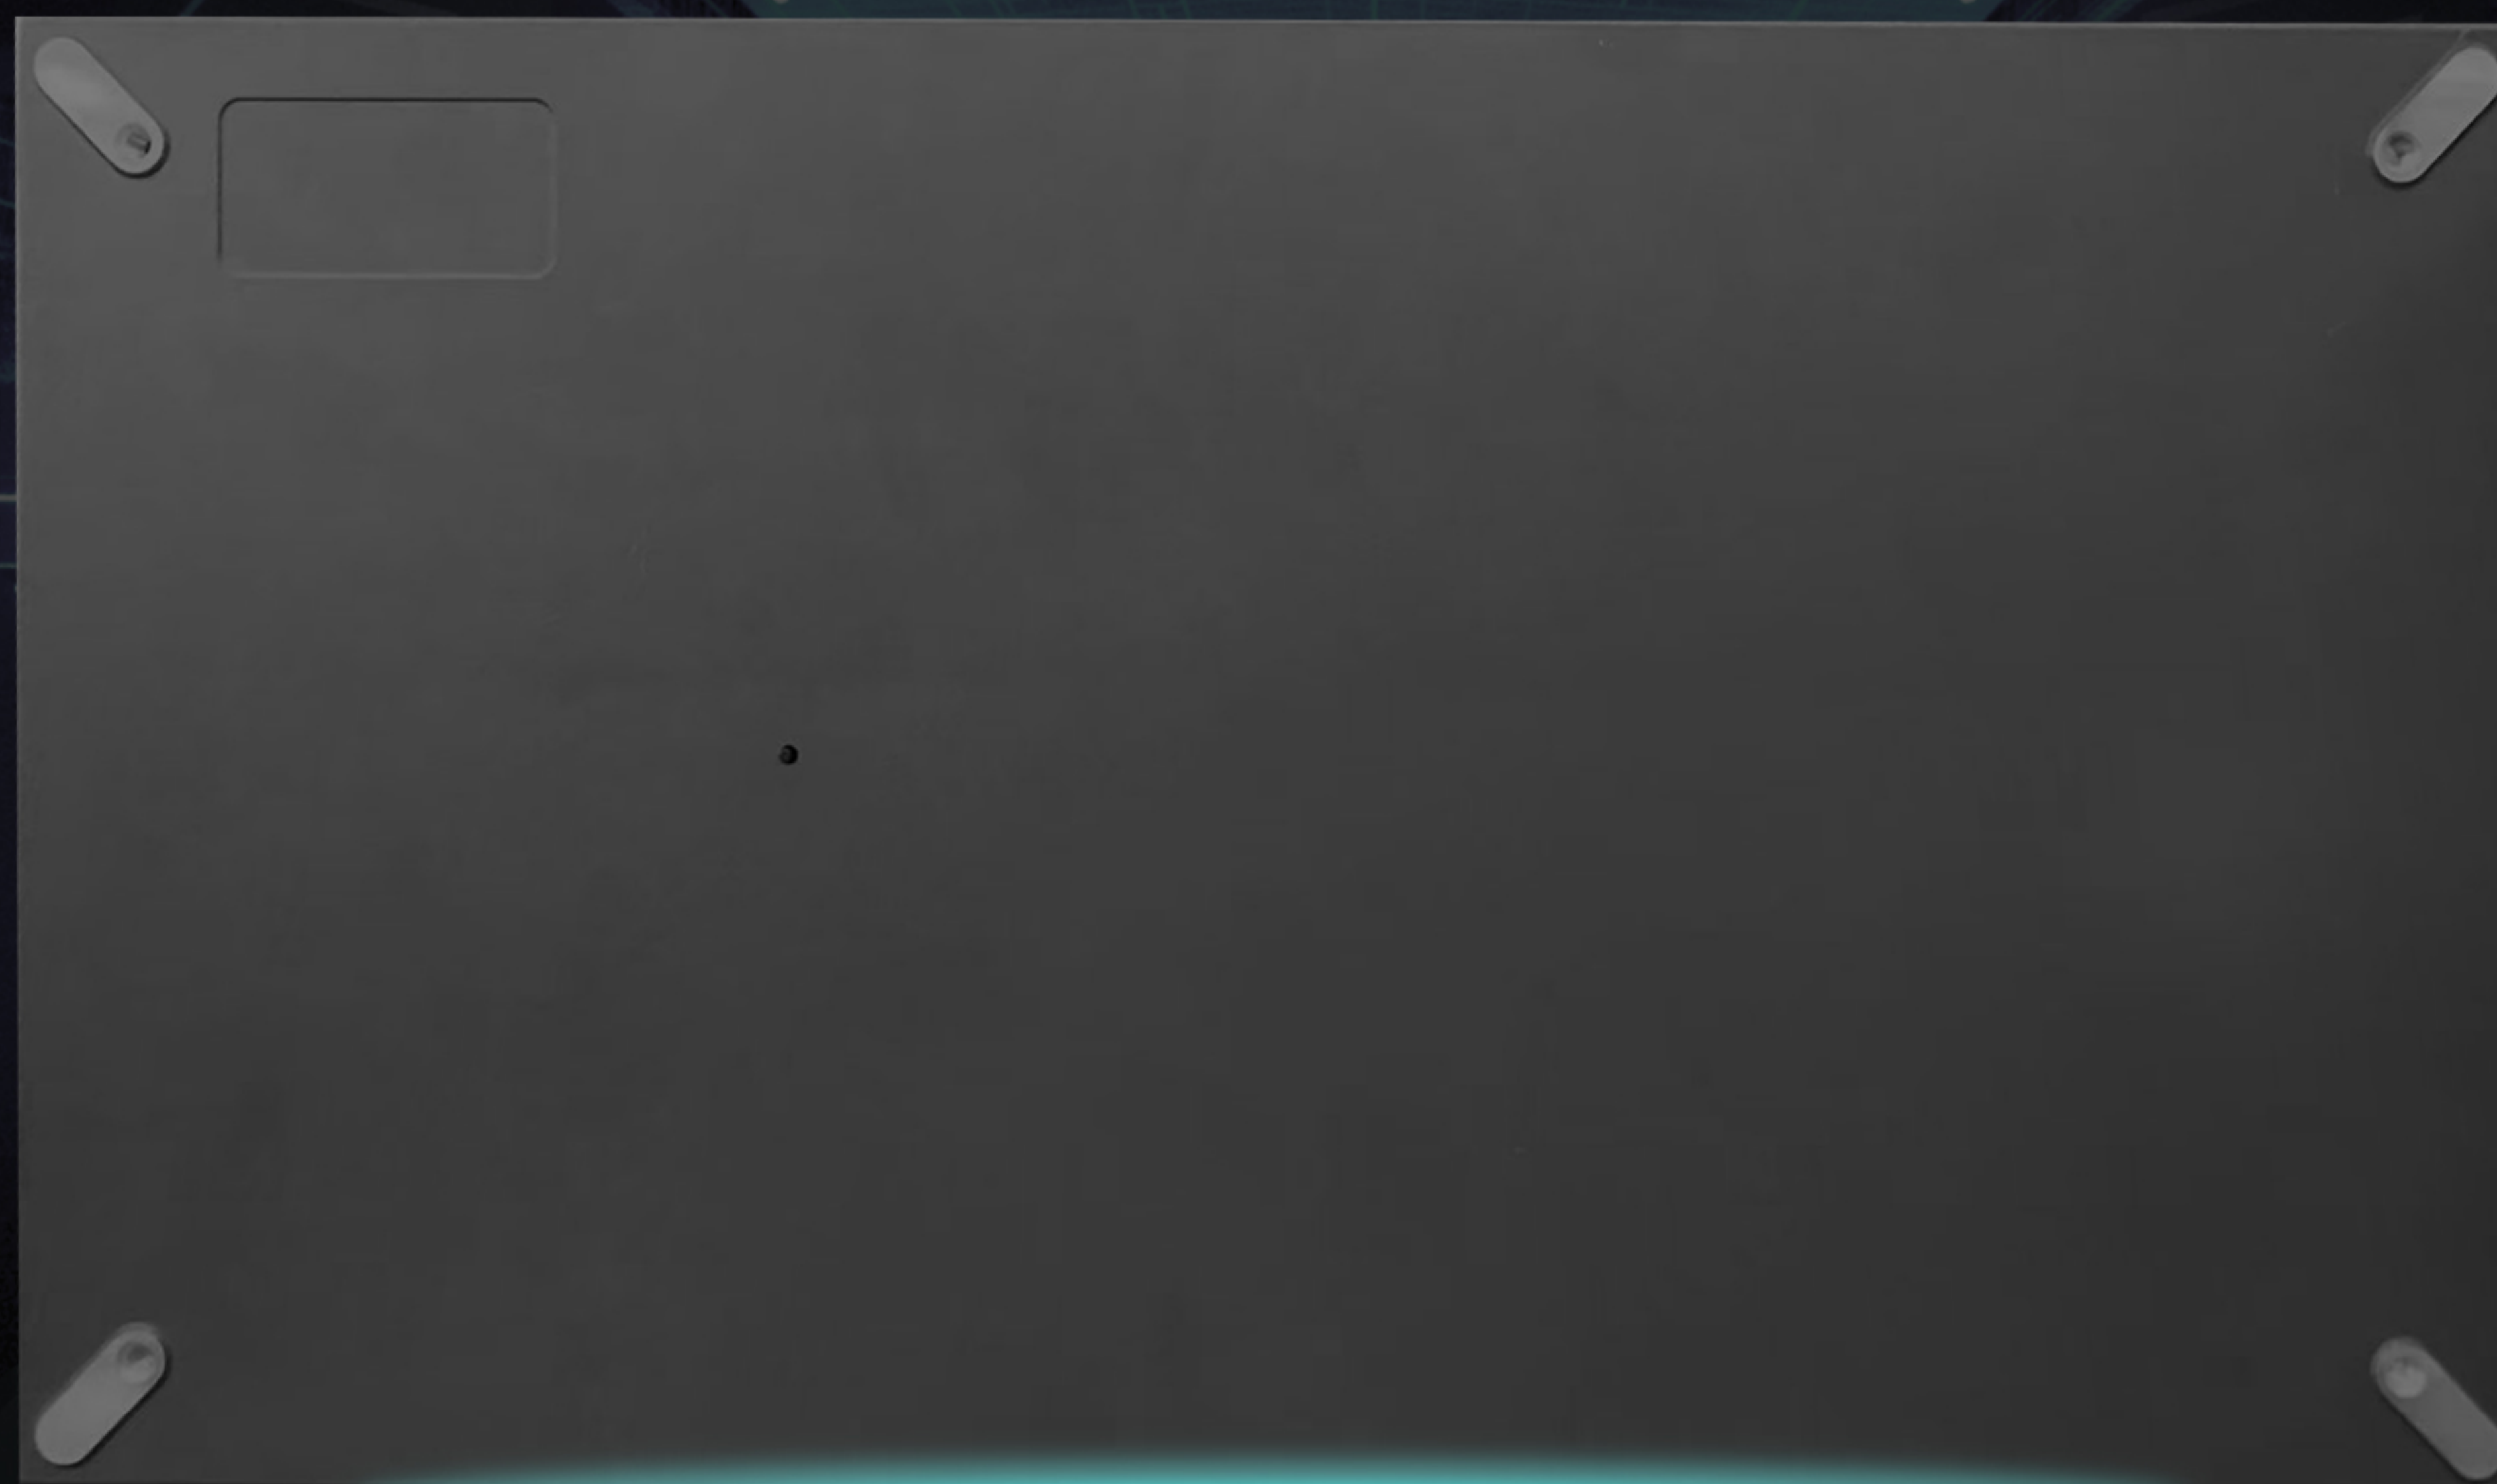

ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display




Different **M**odules Use **S**ame **HUB**

Customize The Box Size
According To The Display Size

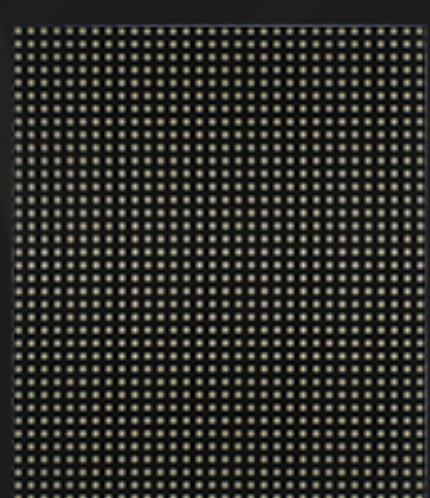

L*H: 150*168.75(mm)

Module

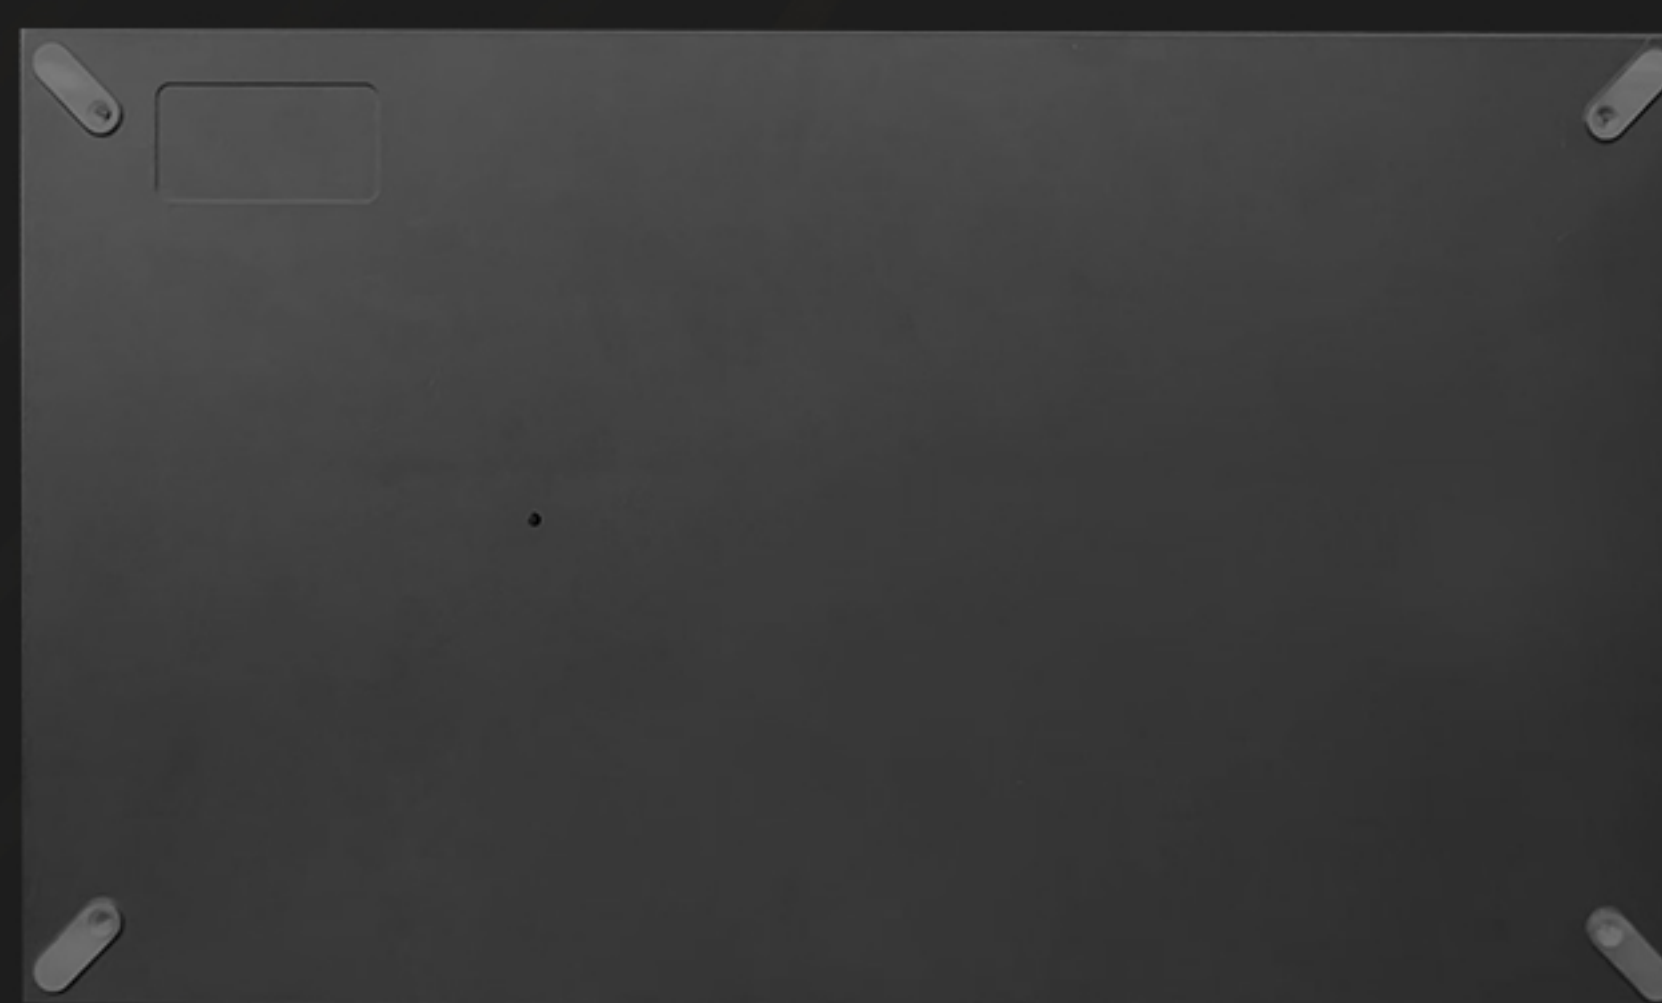

L*H: 600*337.5(mm)

Cabinet



Weight 4.2kg

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display



Full Front Maintenance

Front installation and maintenance,
flexible installation and convenient maintenance

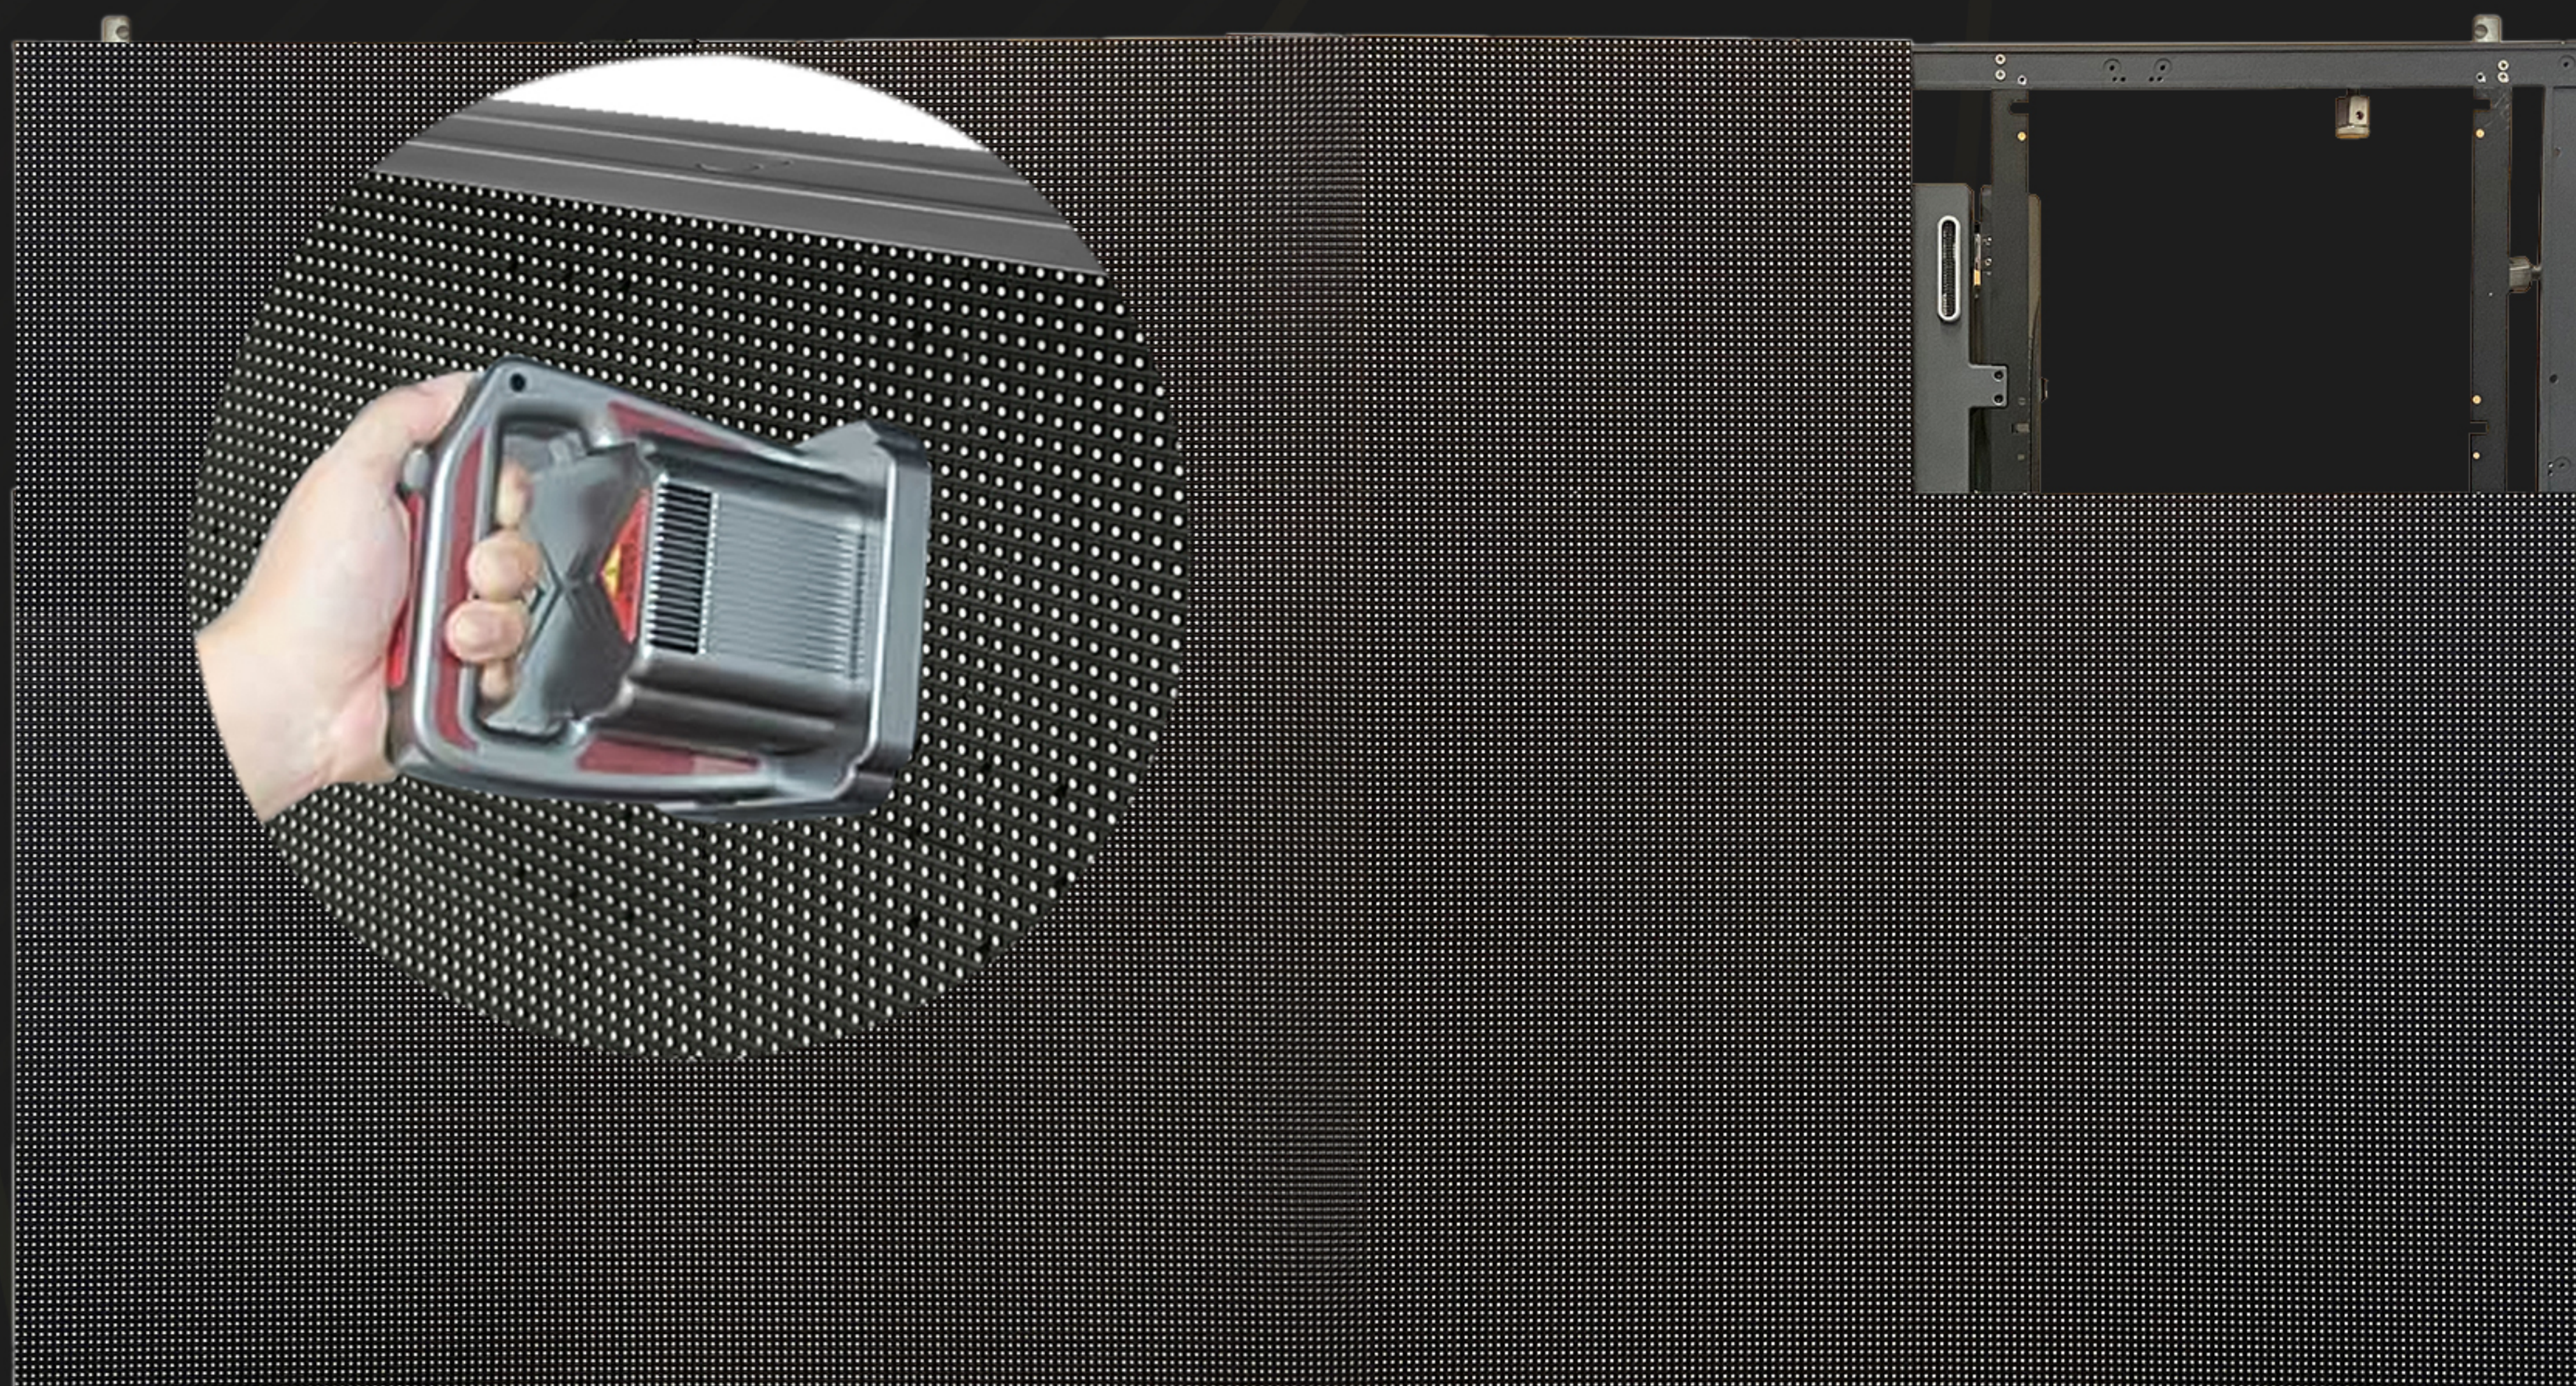


Fixed Installation

EnBon

High Refresh Rate

High Grayscale

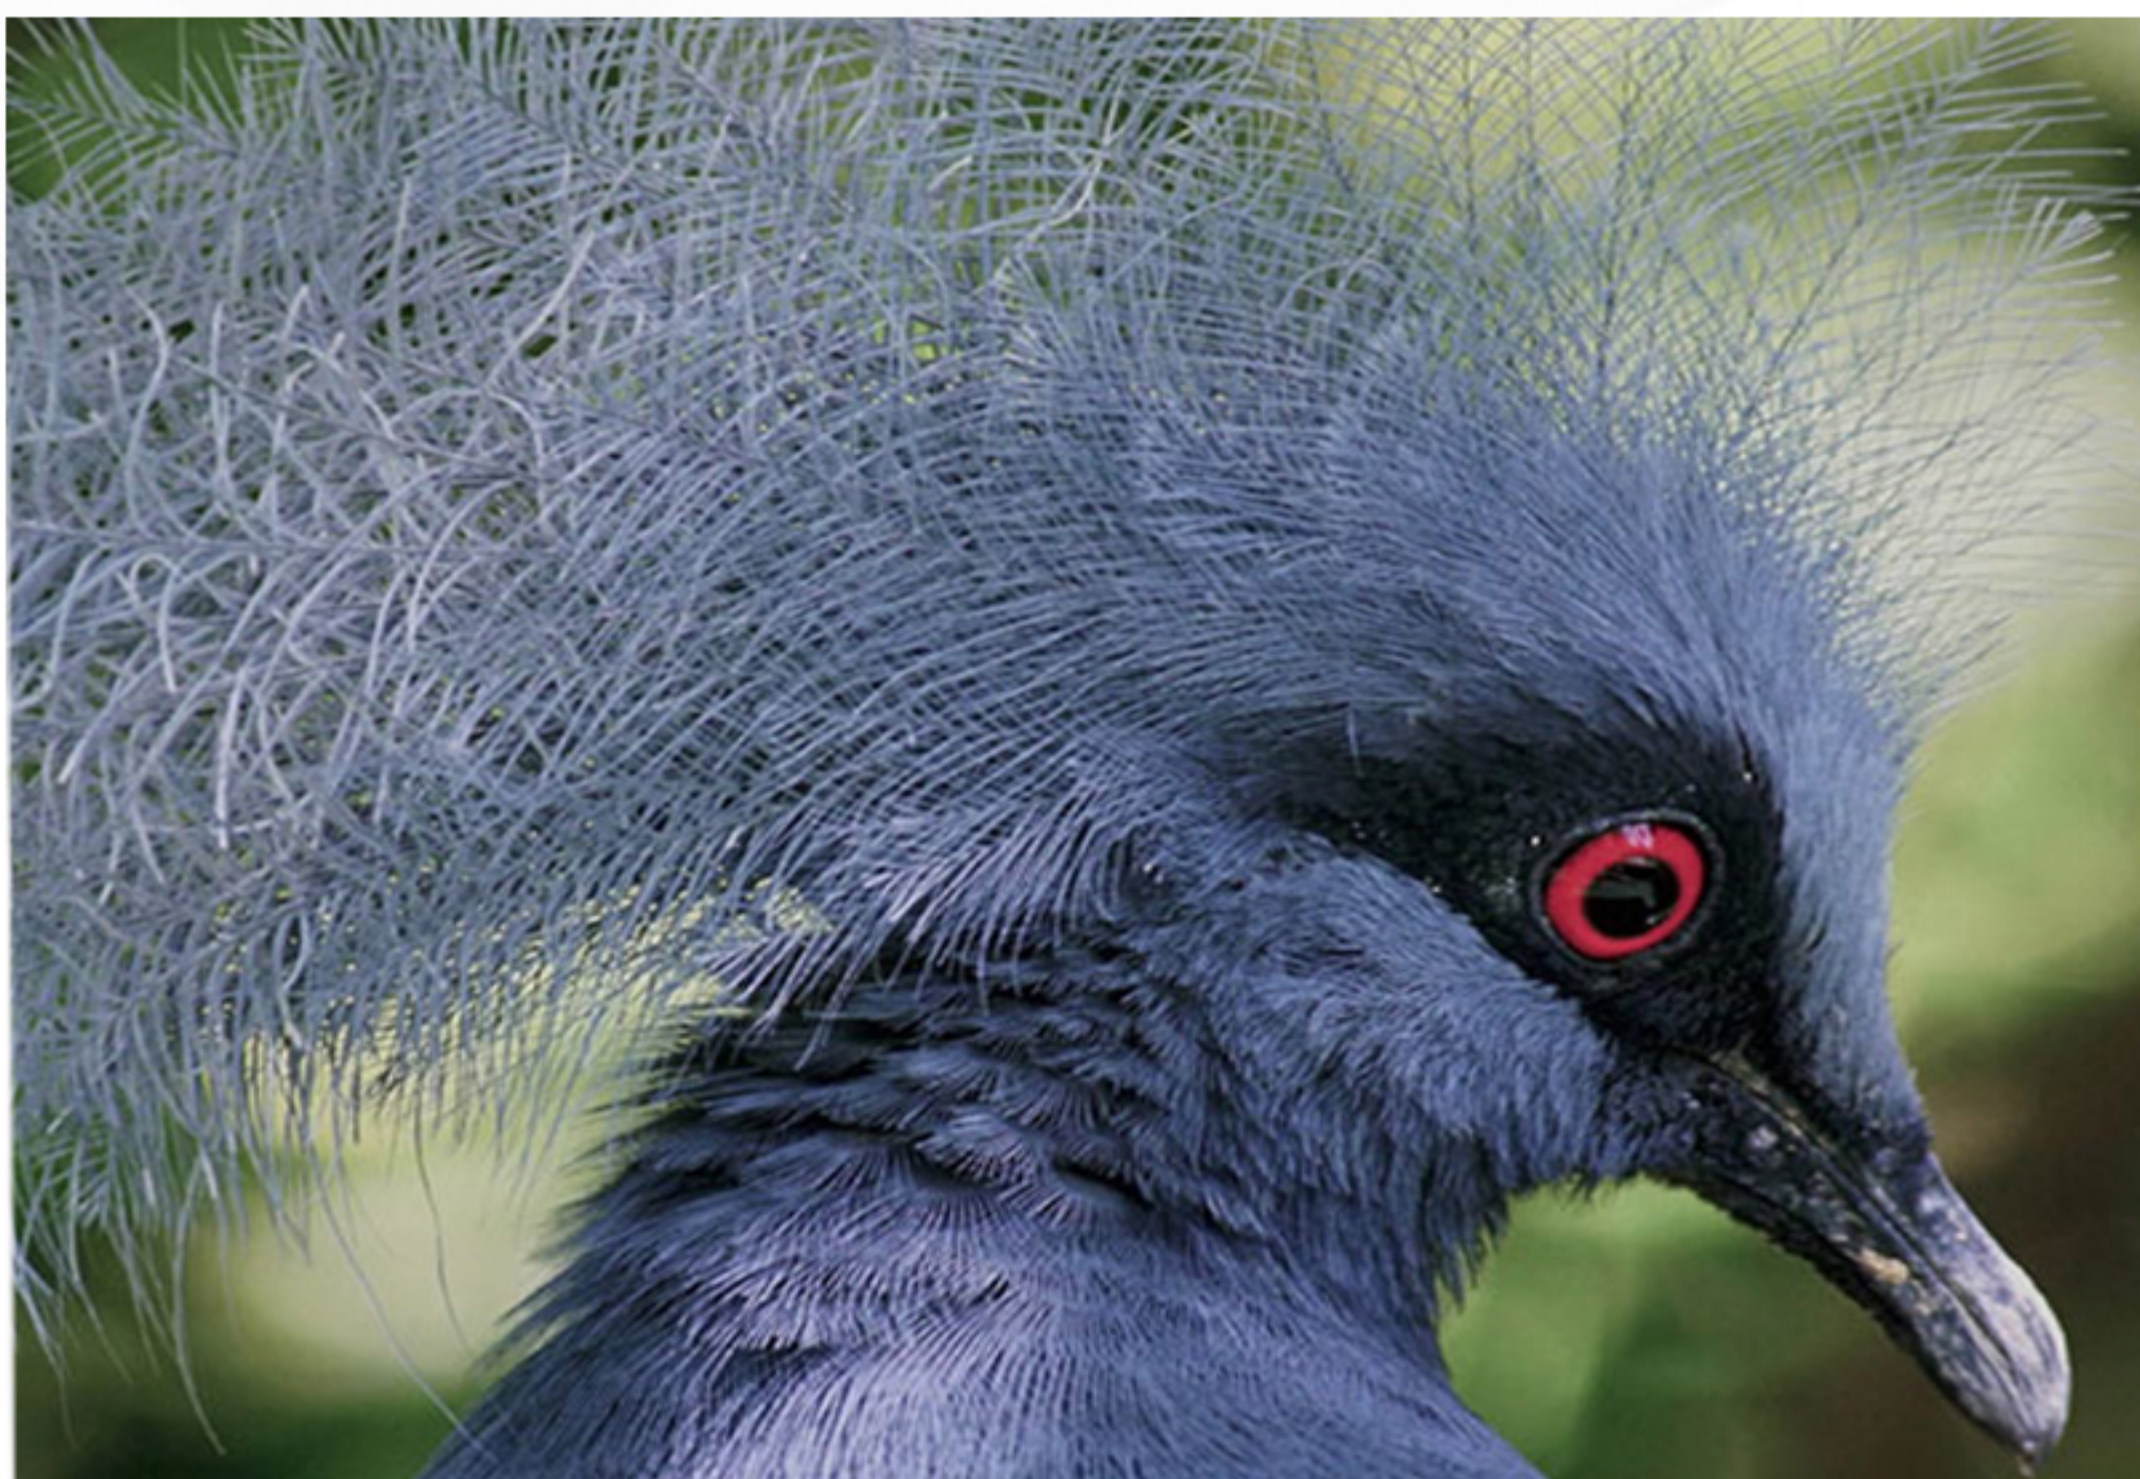

Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale

ENBON GROUP
Spirit & Success, **Together**




Enbon



Enbon **Led** Display



Ultra-thin **And** Light

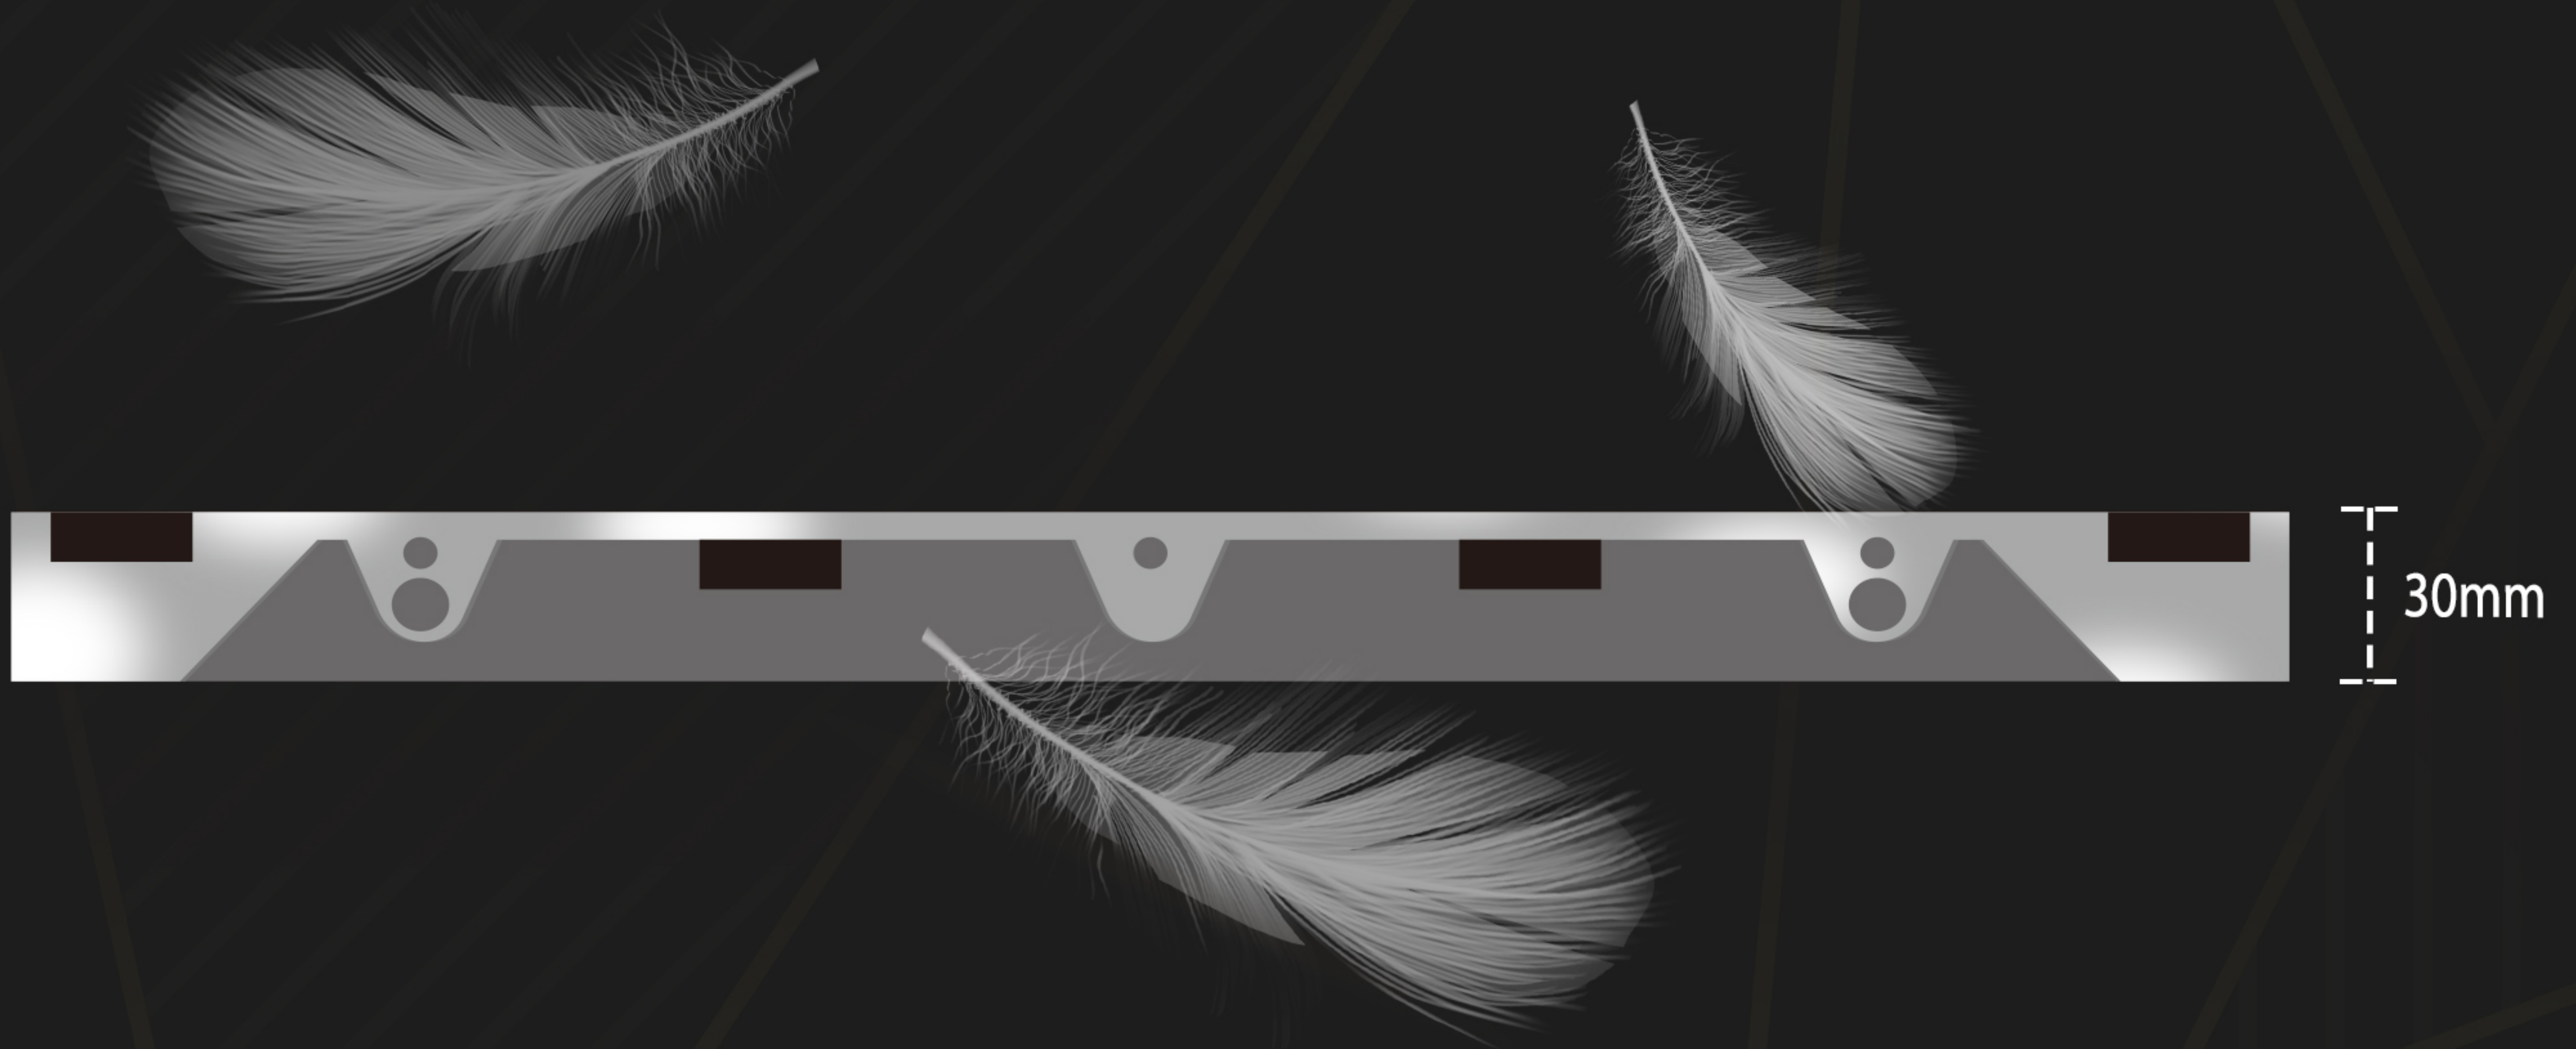


ⓐ Lightweight Cabinet **4.2kg**

ⓐ **Aluminum** Module and Cabinet



Low Power Consumption

Compared with similar products on the market, it saves 30% power

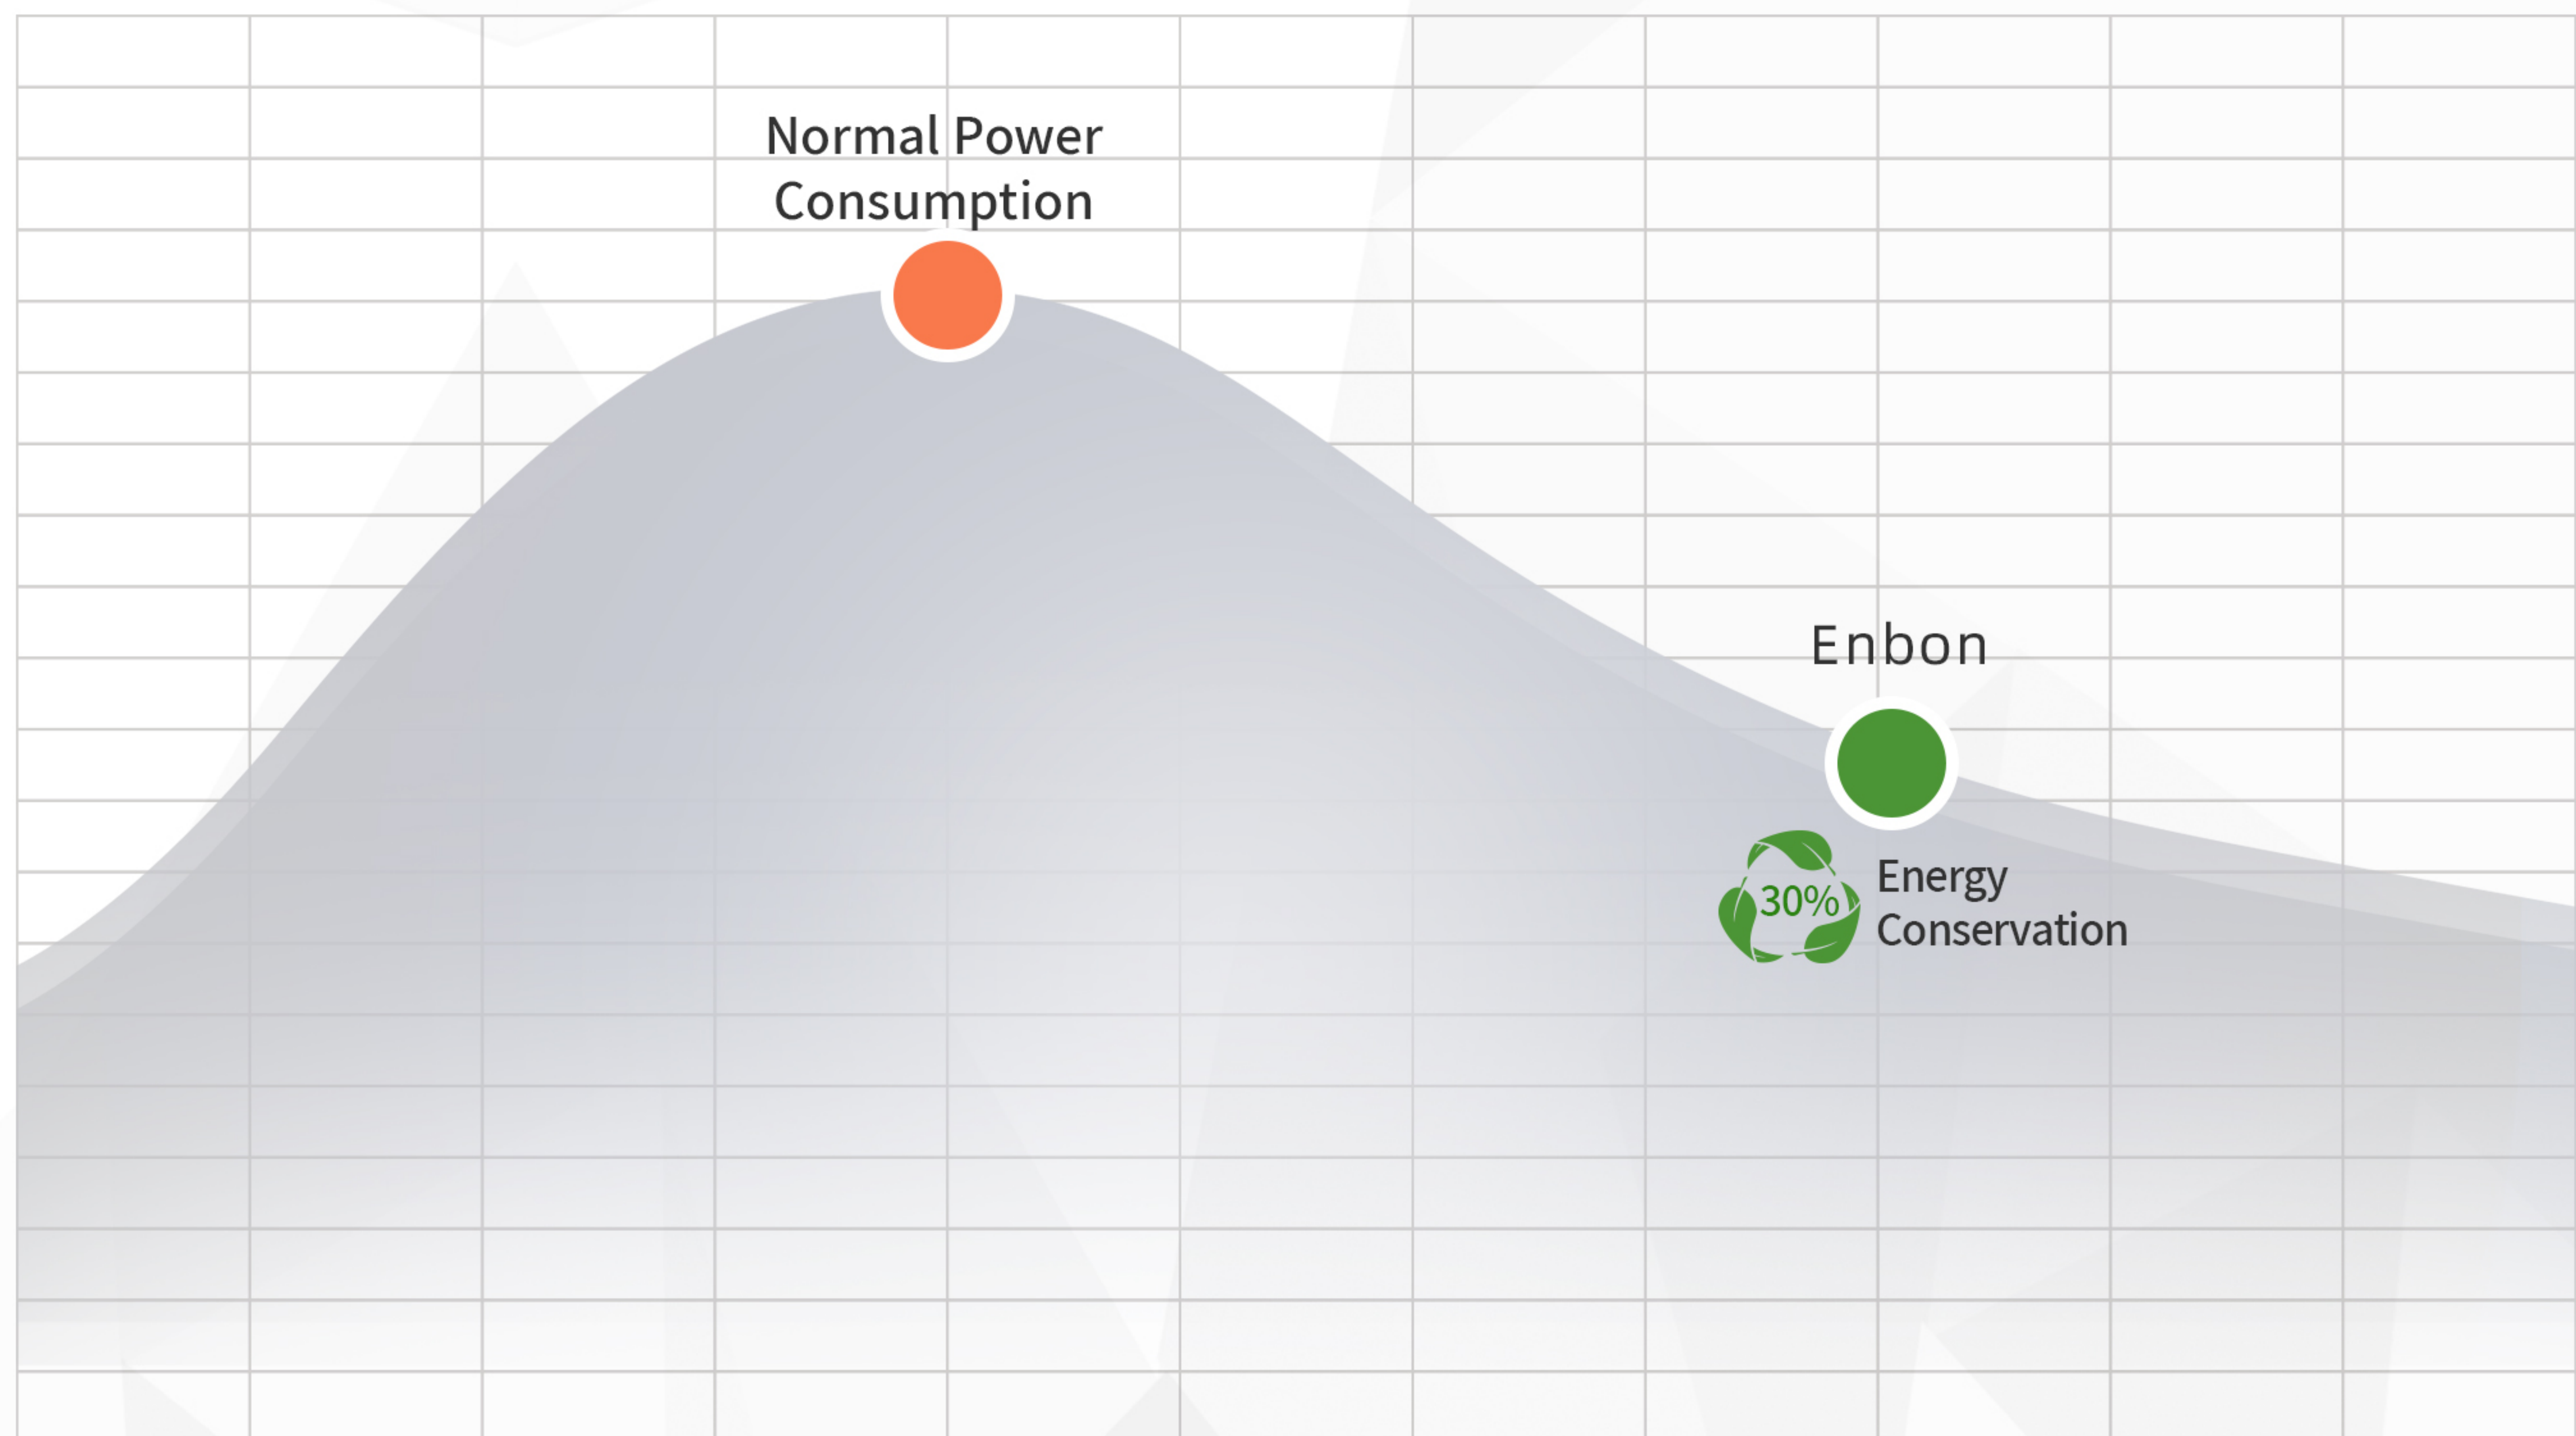



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	0.93	1.25	1.56
Density (dots/m2)	1137777	640000	409600
Brightness	≥ 800 cd/m²	≥ 500 cd/m²	≥ 500 cd/m²
IP Rating	IP54	IP54	IP54
Cabinet Materiel	Die-casting Aluminum		
Refresh Rate	3840 Hz		
Scan	40 scan	60 scan	48 scan
Cabinet Weight	4.2 kg	4.2 kg	4.2 kg
Module Size (mm)	150*168.75	150*168.75	150*168.75
Cabinet Size (mm)	600*337.5*30	600*337.5*30	600*337.5*30
Module Pixel	160*180 dots	120*135 dots	96*108 dots
Cabinet Pixel	640*360 dots	480*270 dots	384*216 dots
Max Power	400 w/sqm	500 w/sqm	400 w/sqm
Average Power	200 w/sqm	250 w/sqm	200 w/sqm
Input Power	AC100~240V (50~60Hz)		
Viewing Angle	H170 (+85/-85) deg V170 (+85/-85) deg		
Control Way	Synchronous/ Asynchronous		
Gray Scale	14 bit		
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI		
Work Humidity	10%~90%		
Work Temperature	-20 ~ + 65°C		

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display