




E Model

Your First Choice Fixed LED Display

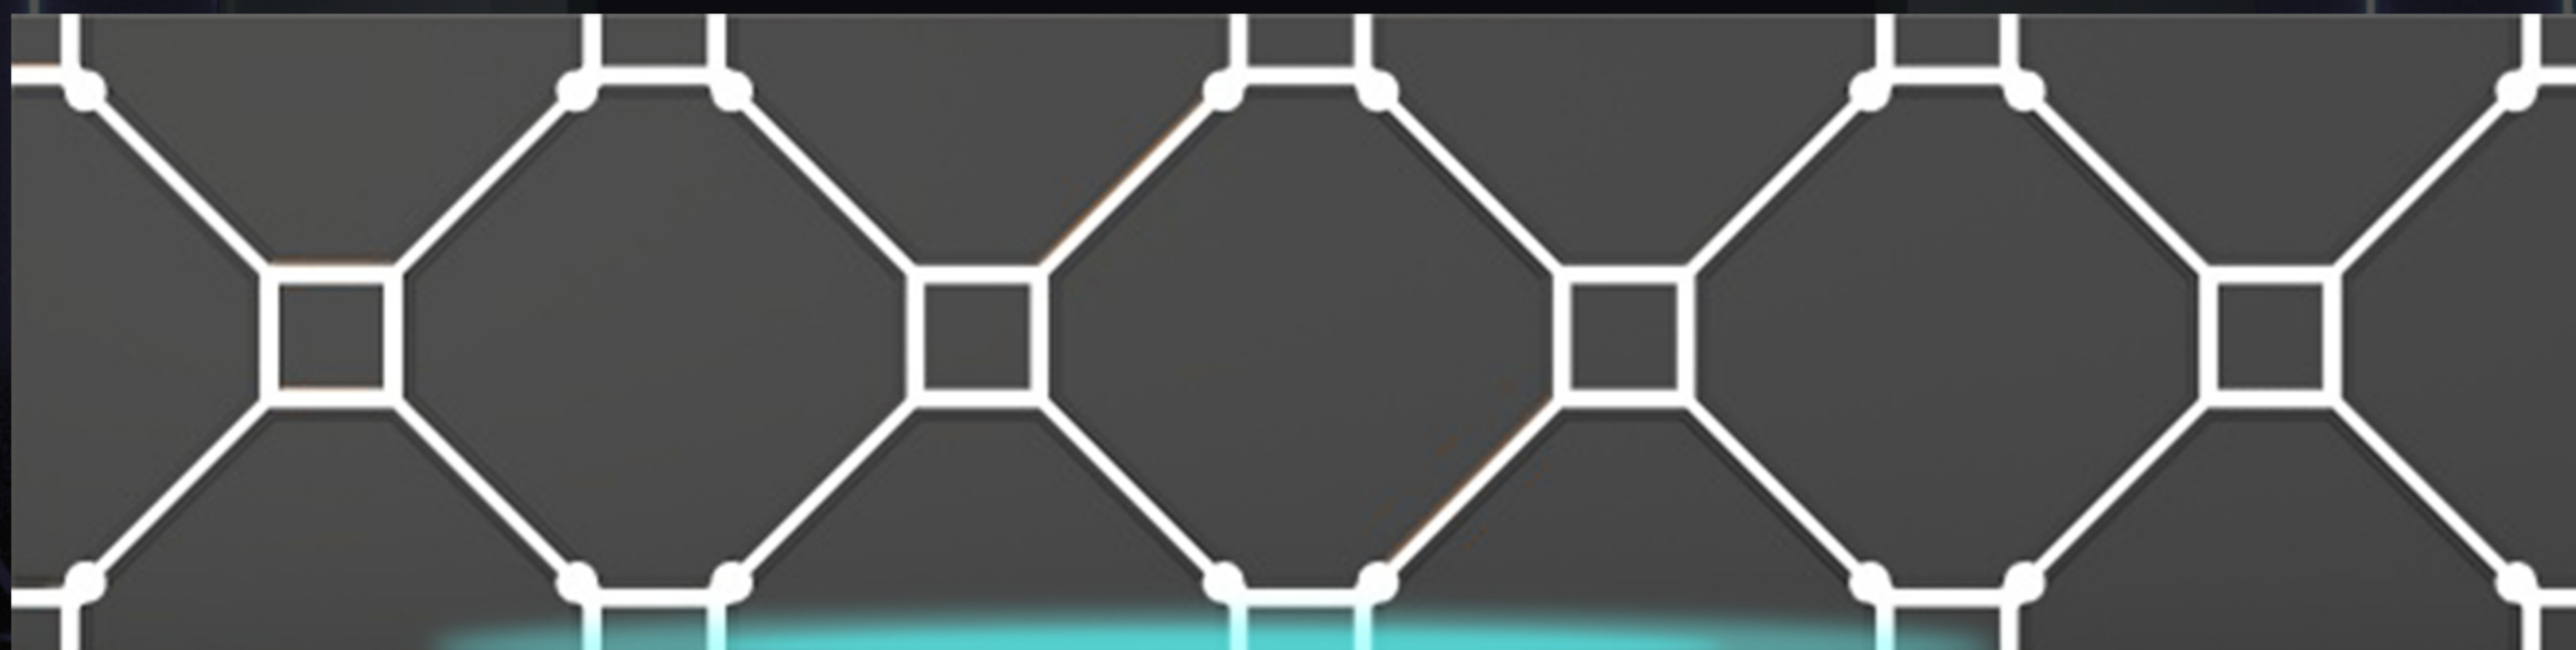

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move




L*H: 250*250(mm)

Module



L*H: 1000*250(mm)

Cabinet

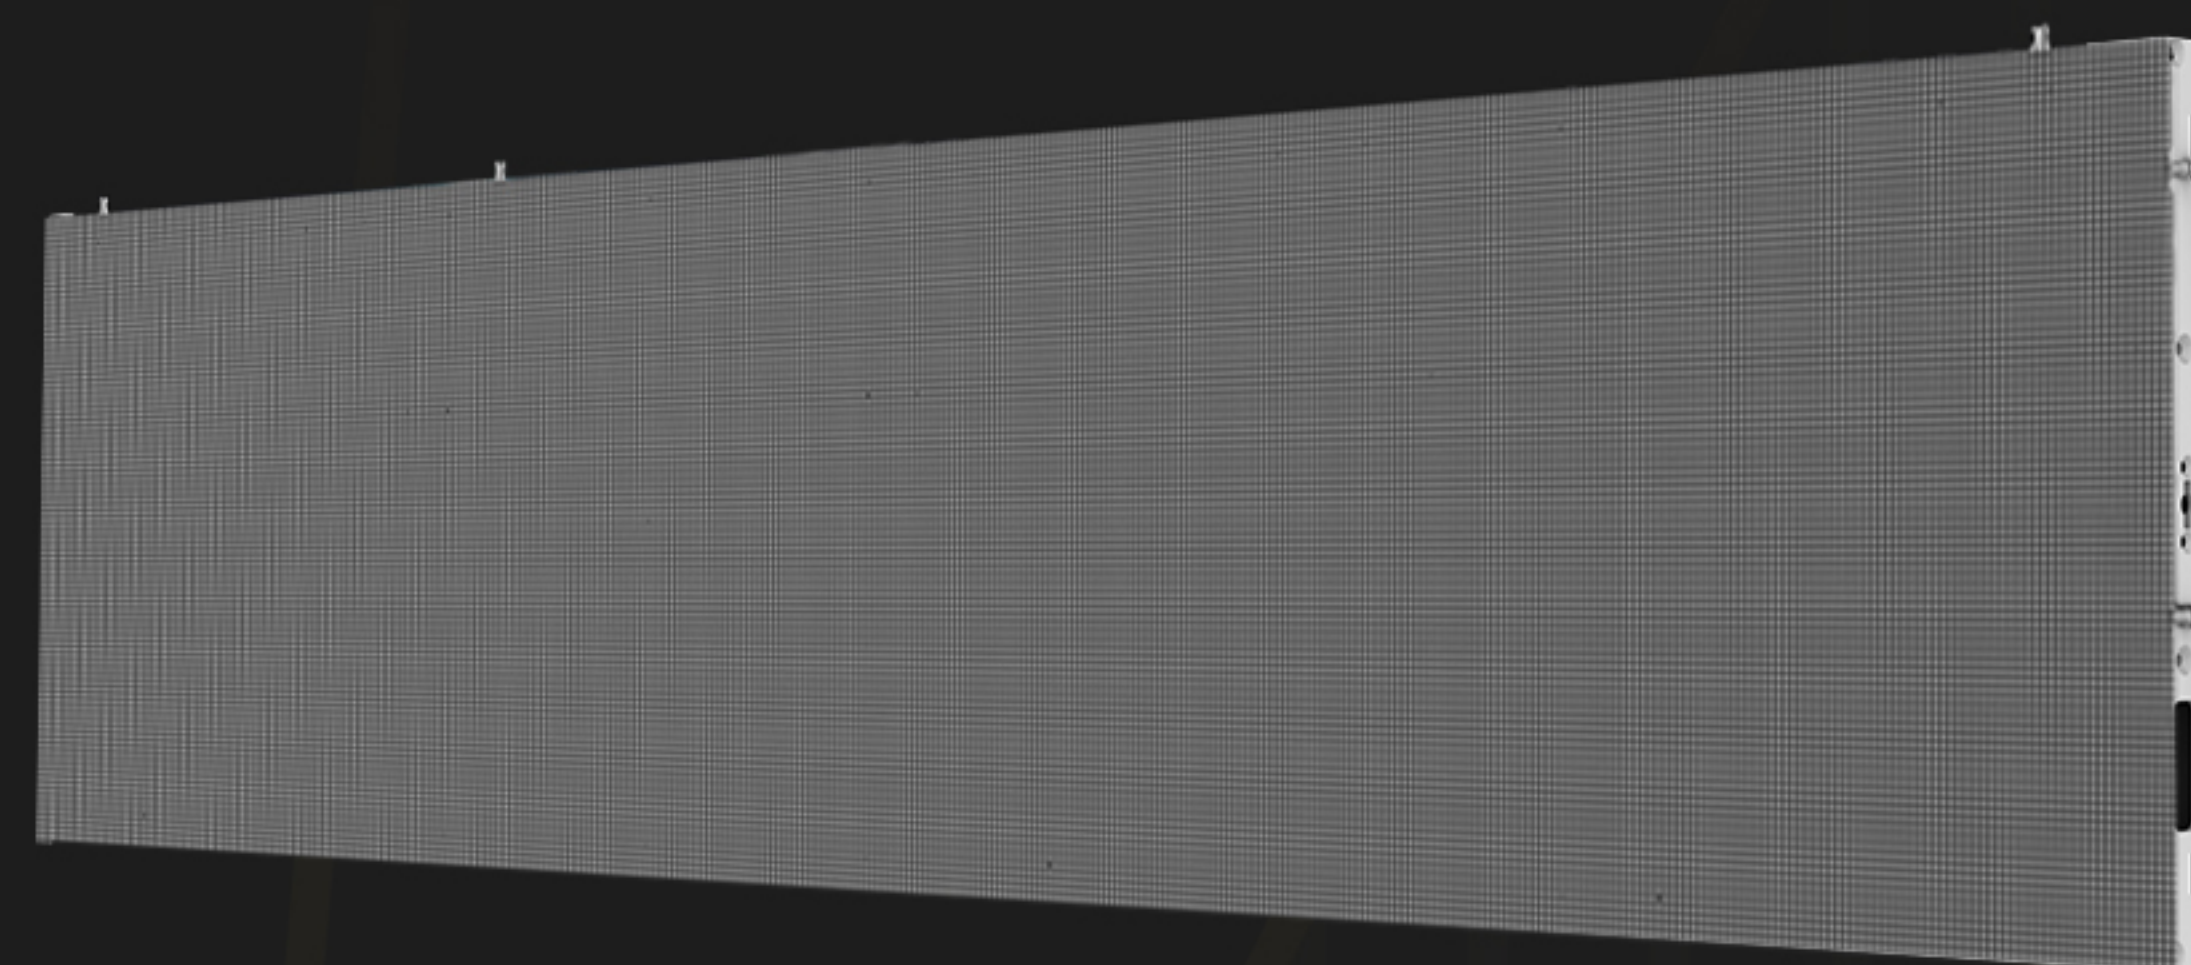

Weight 4.8kg

ENBON GROUP
Spirit & Success, **T**ogether



Enbon



Enbon **L**ed Display



Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Perfect Ratio 16:9



Doudle Back



EnBon

High Refresh Rate


High Grayscale



Low Refresh Rate



High Refresh Rate

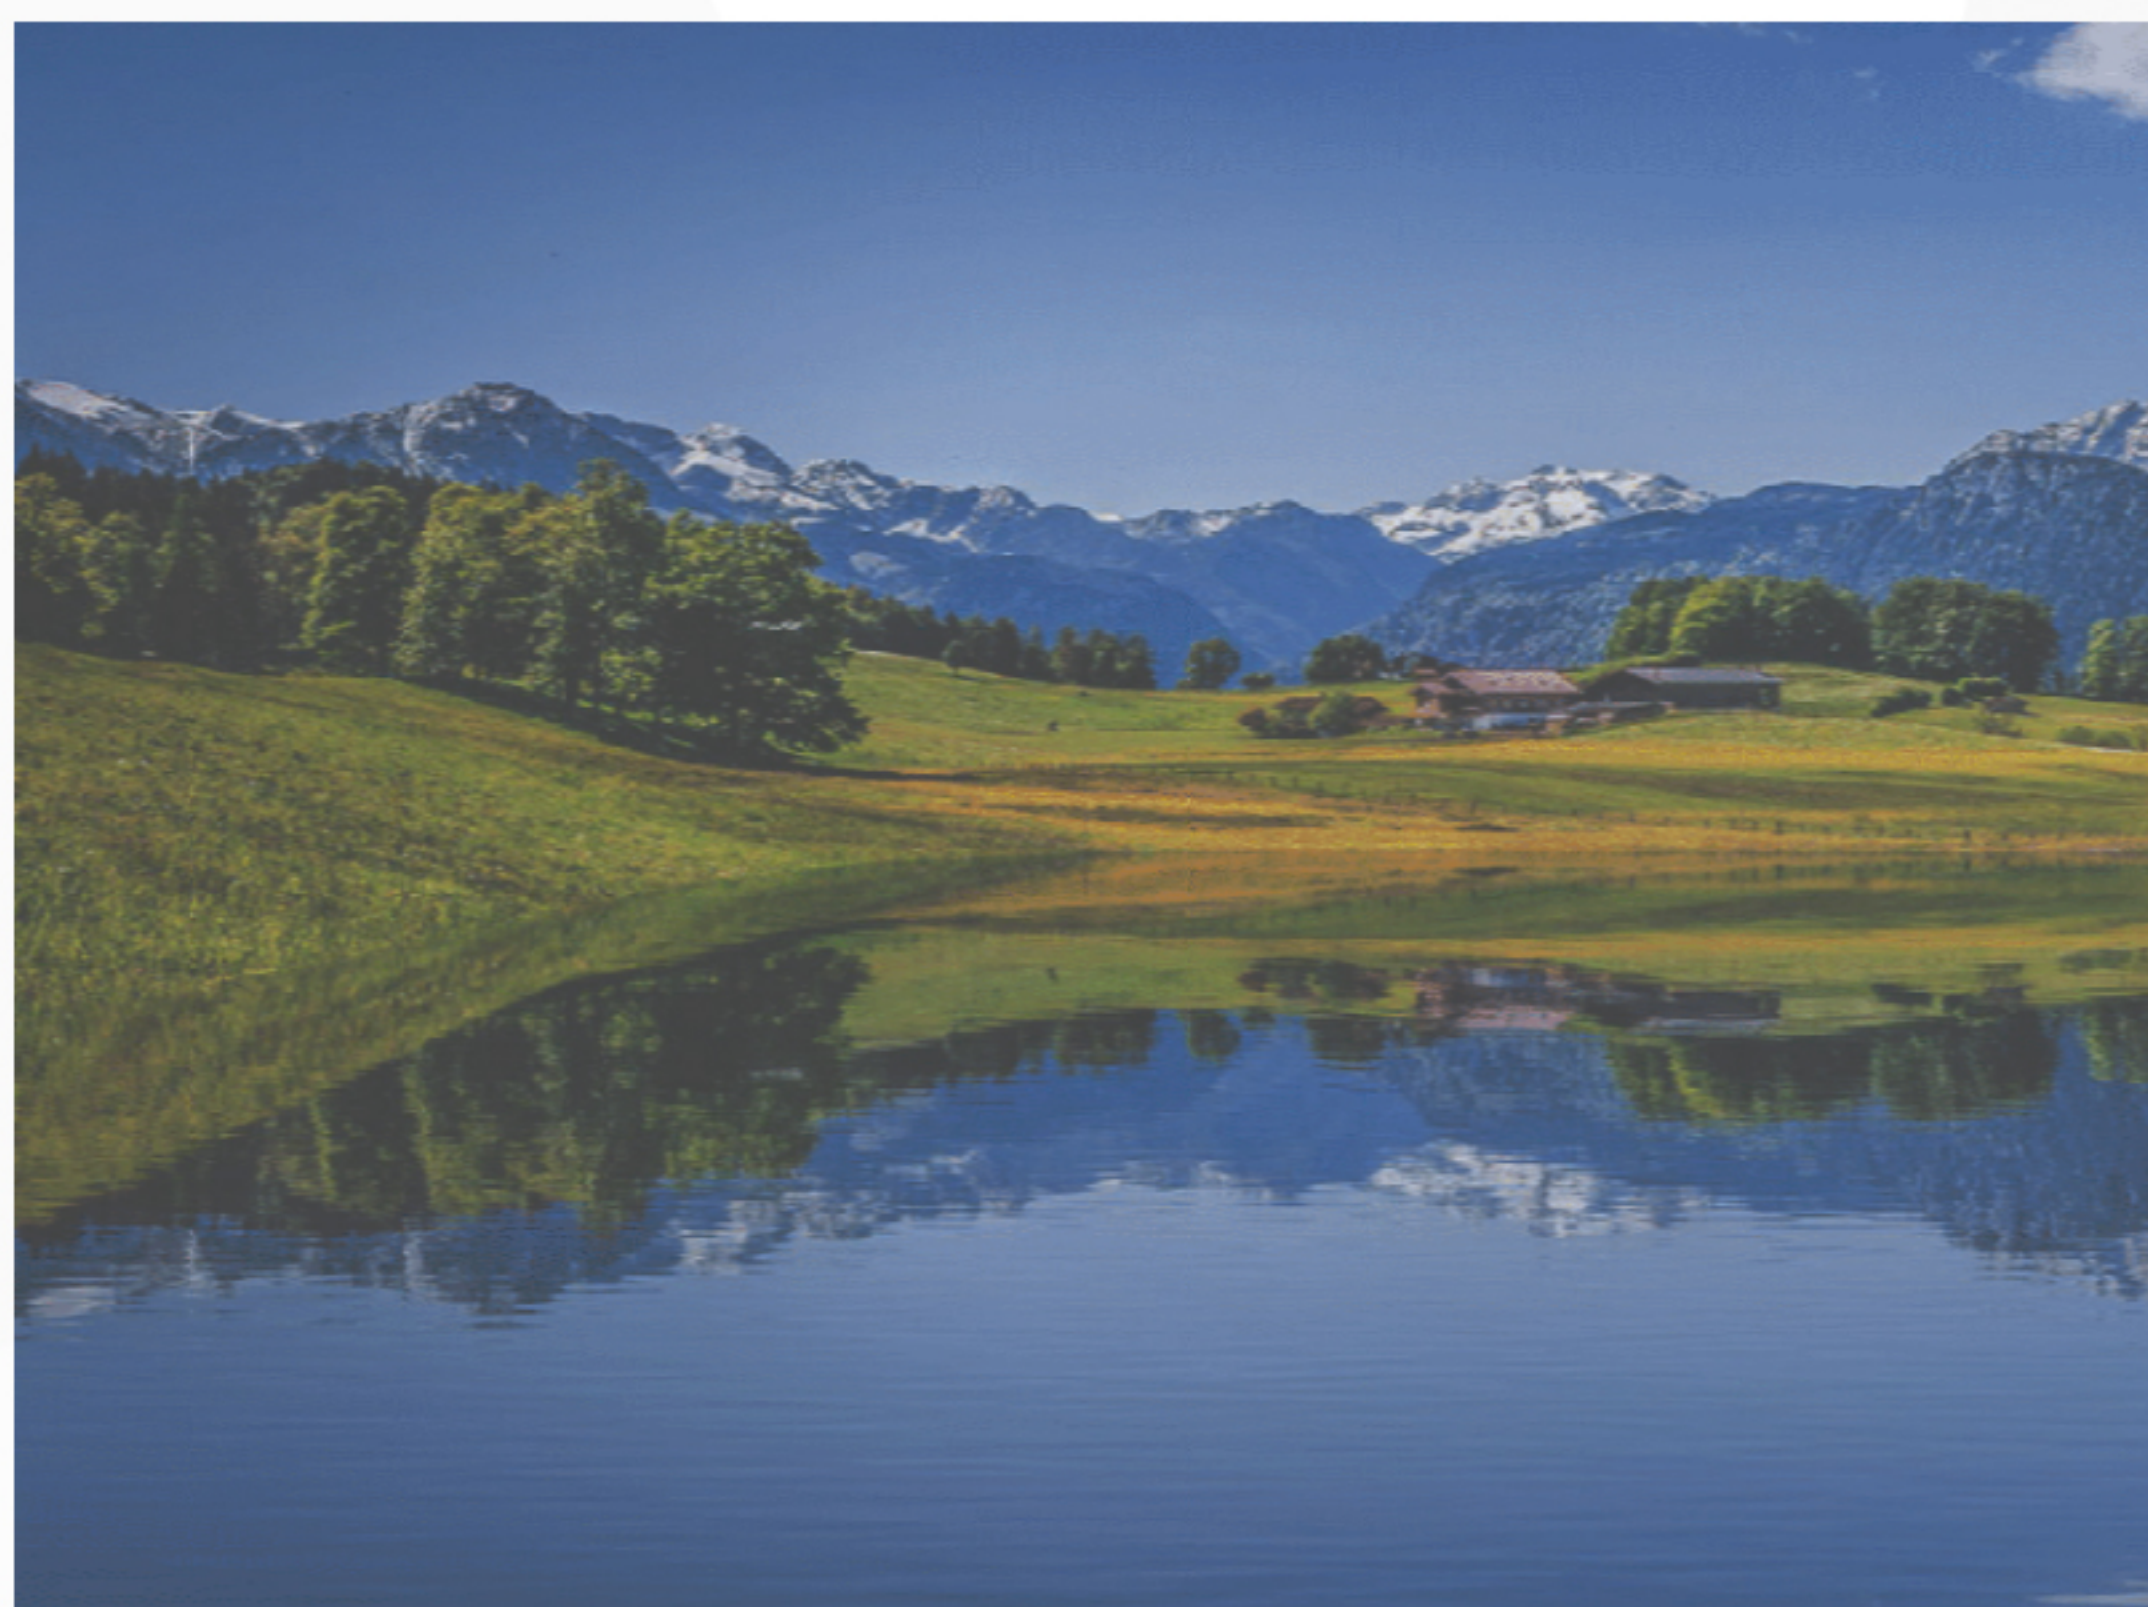

Low Grayscale




High Grayscale




Double Backup


Dual receiving card backup, dual power backup (optional), 4 network port input and output, the transmission effect is more stable

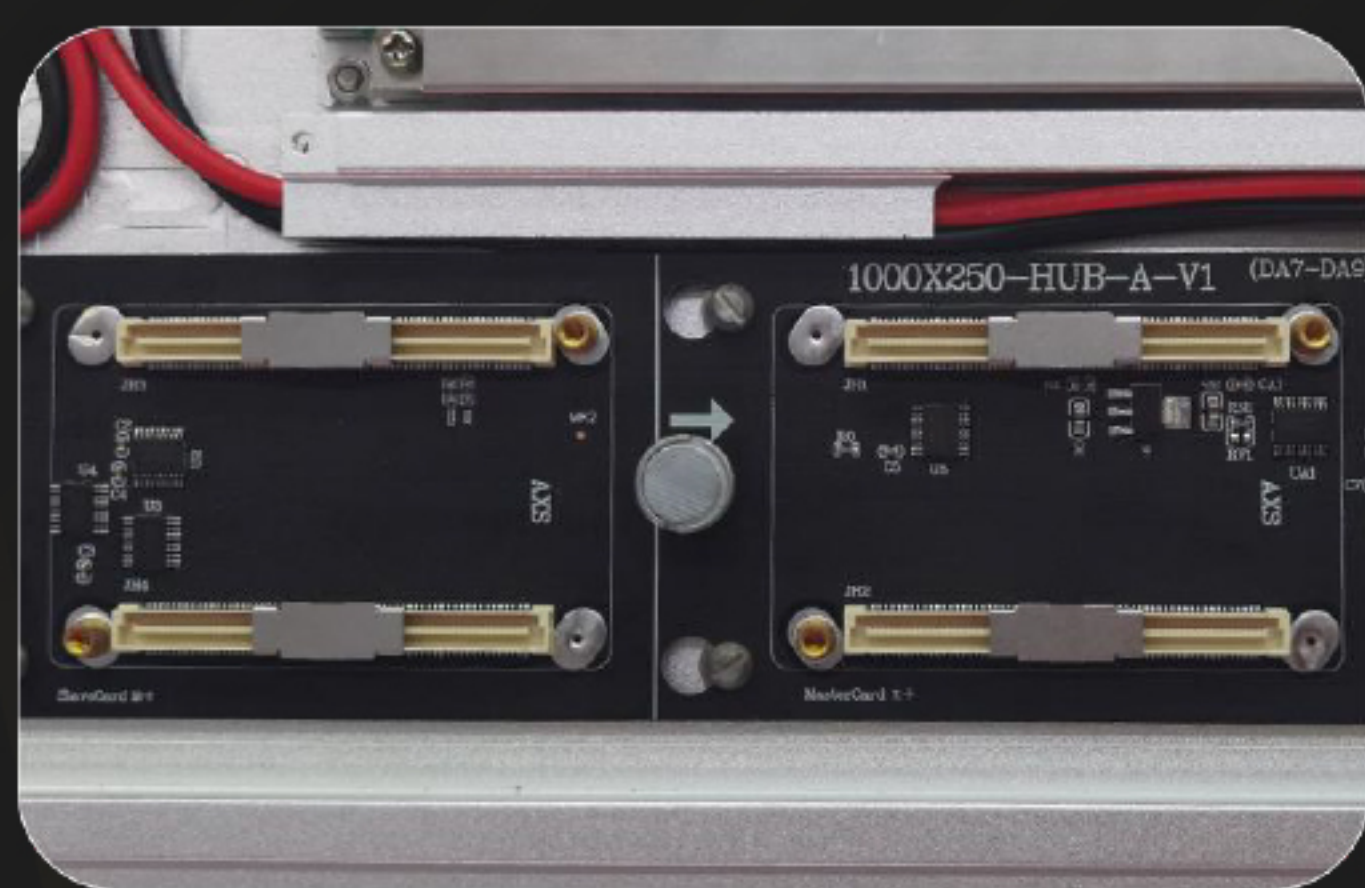

Receiving Card Backup

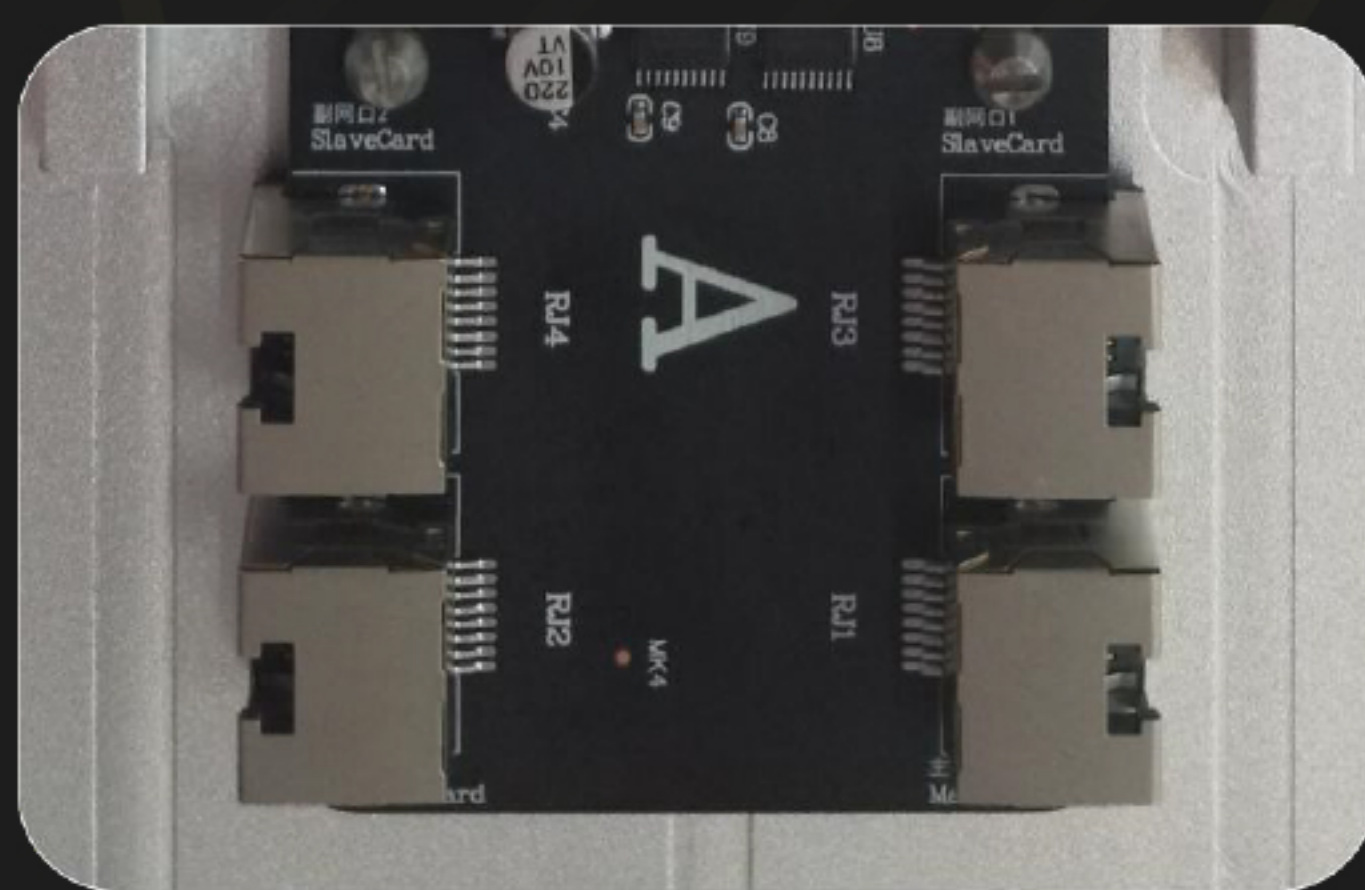

4 Network Port

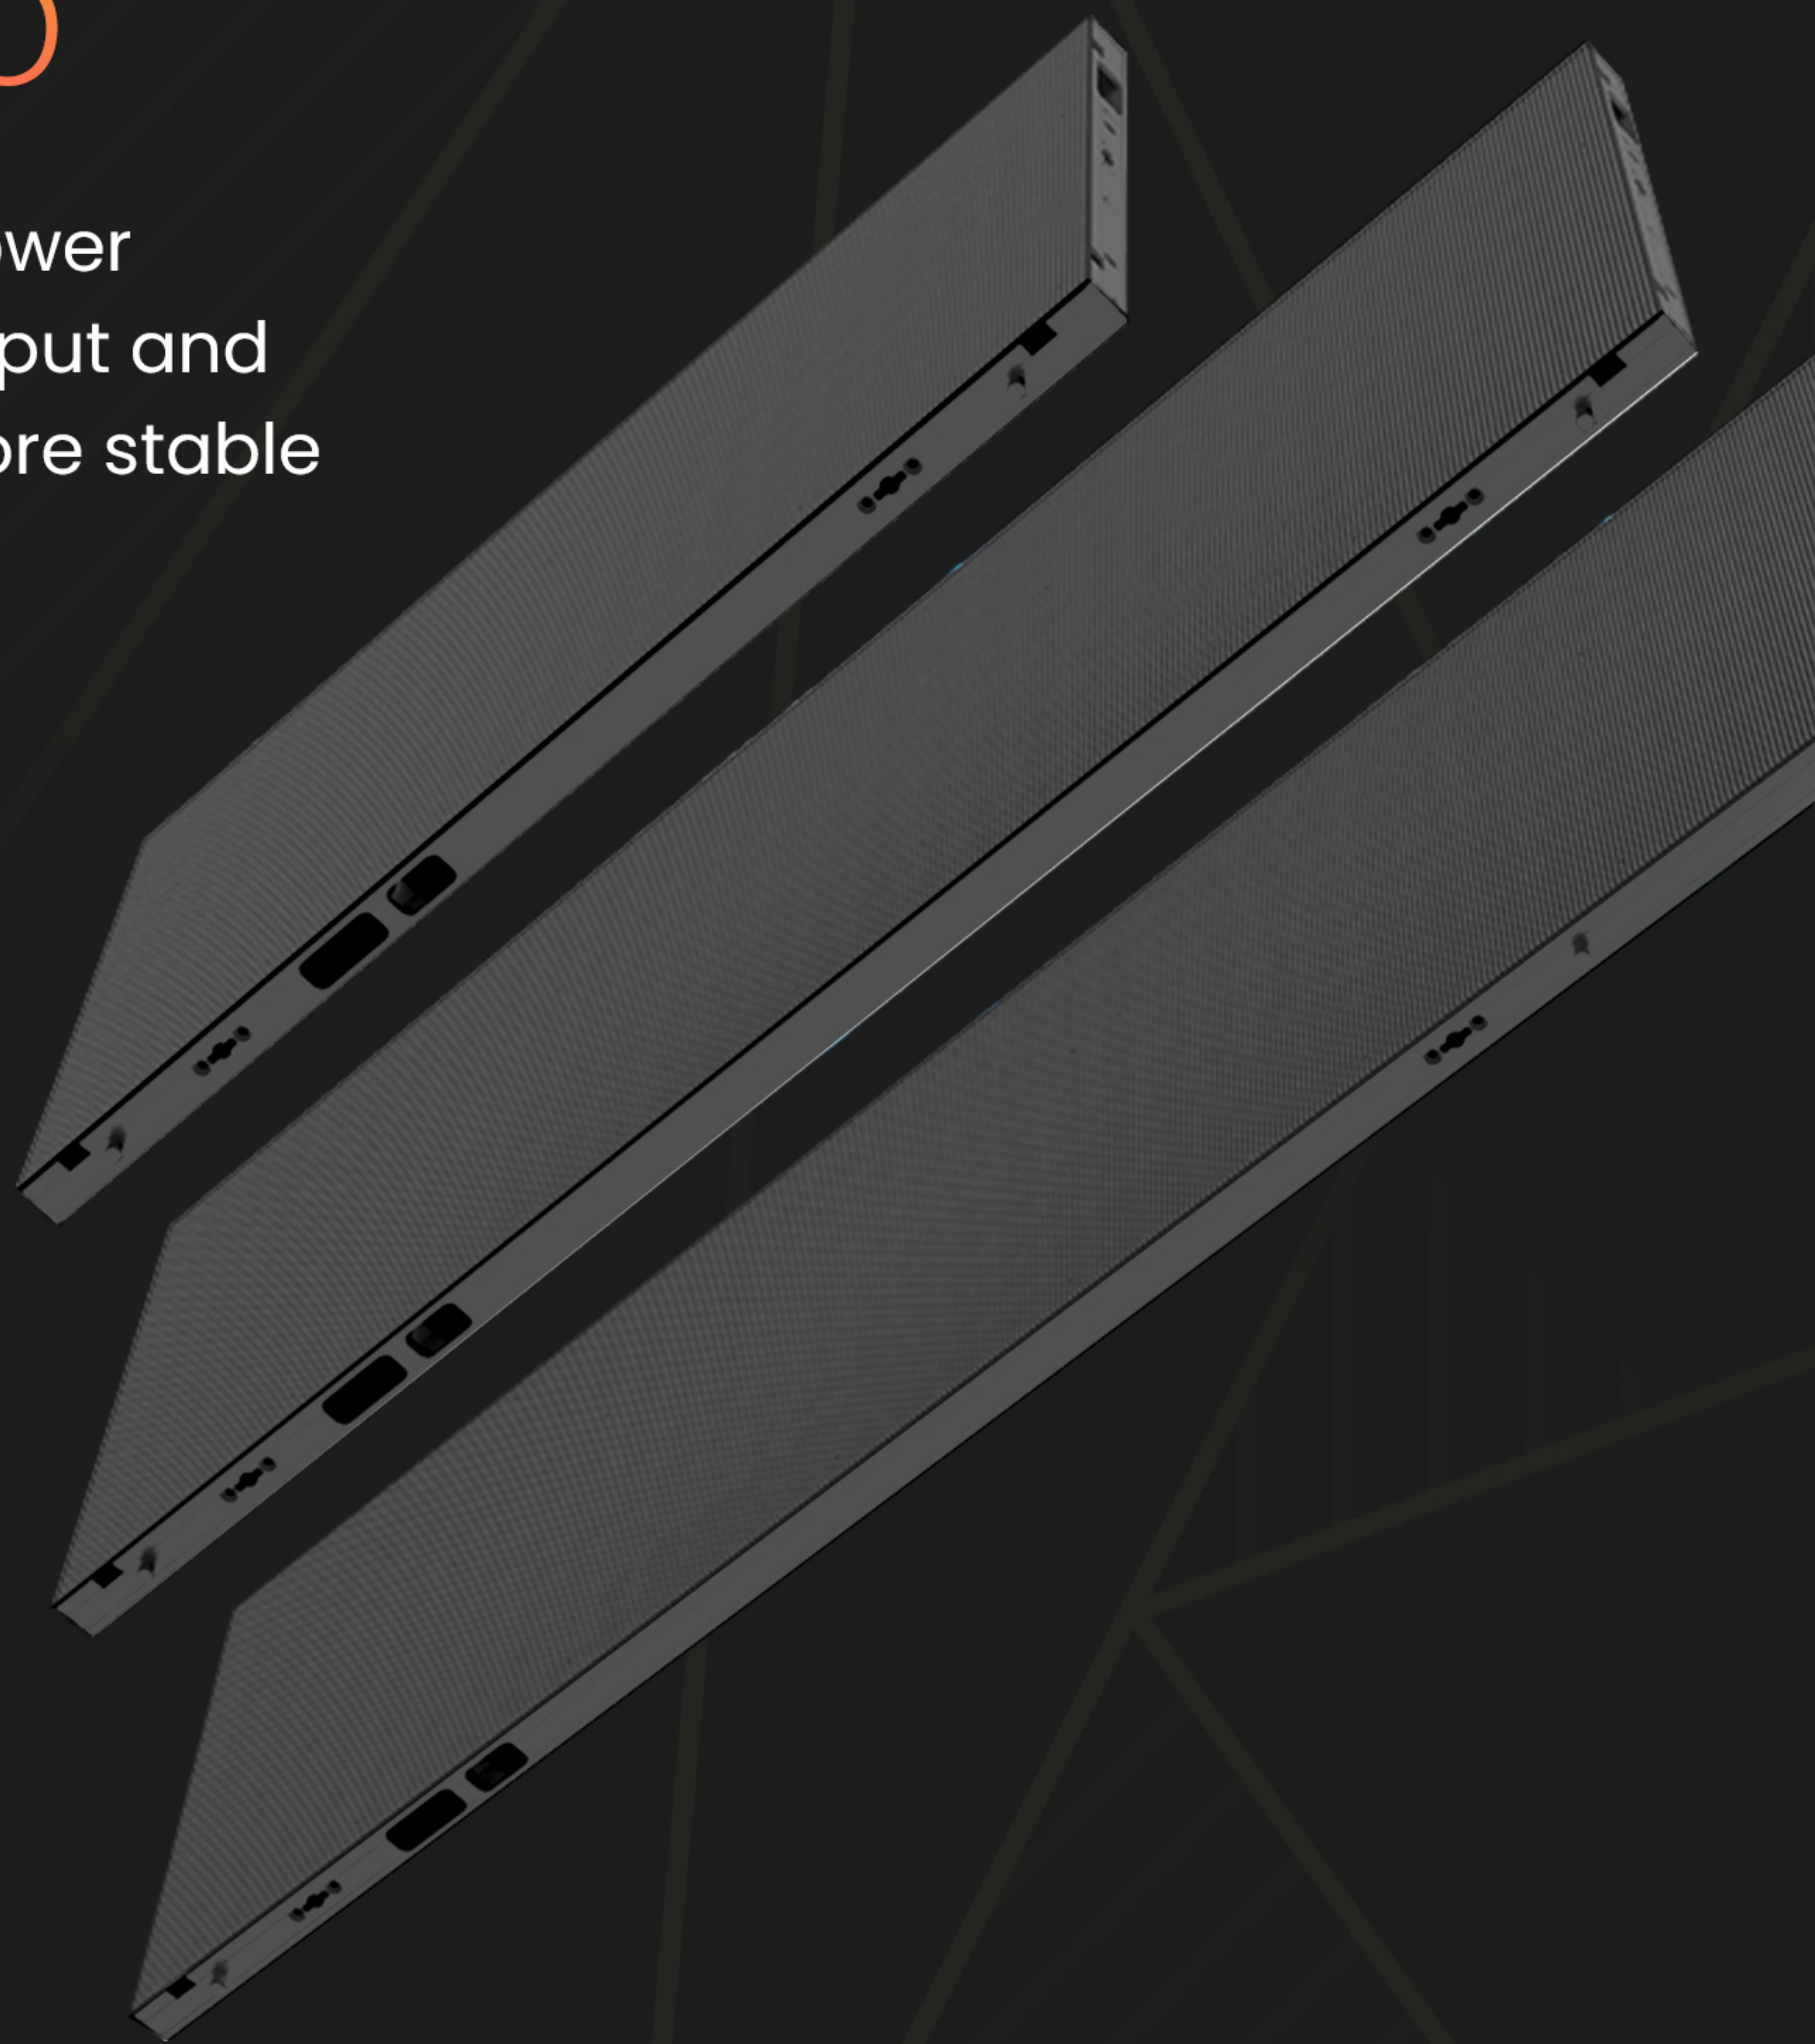




Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation

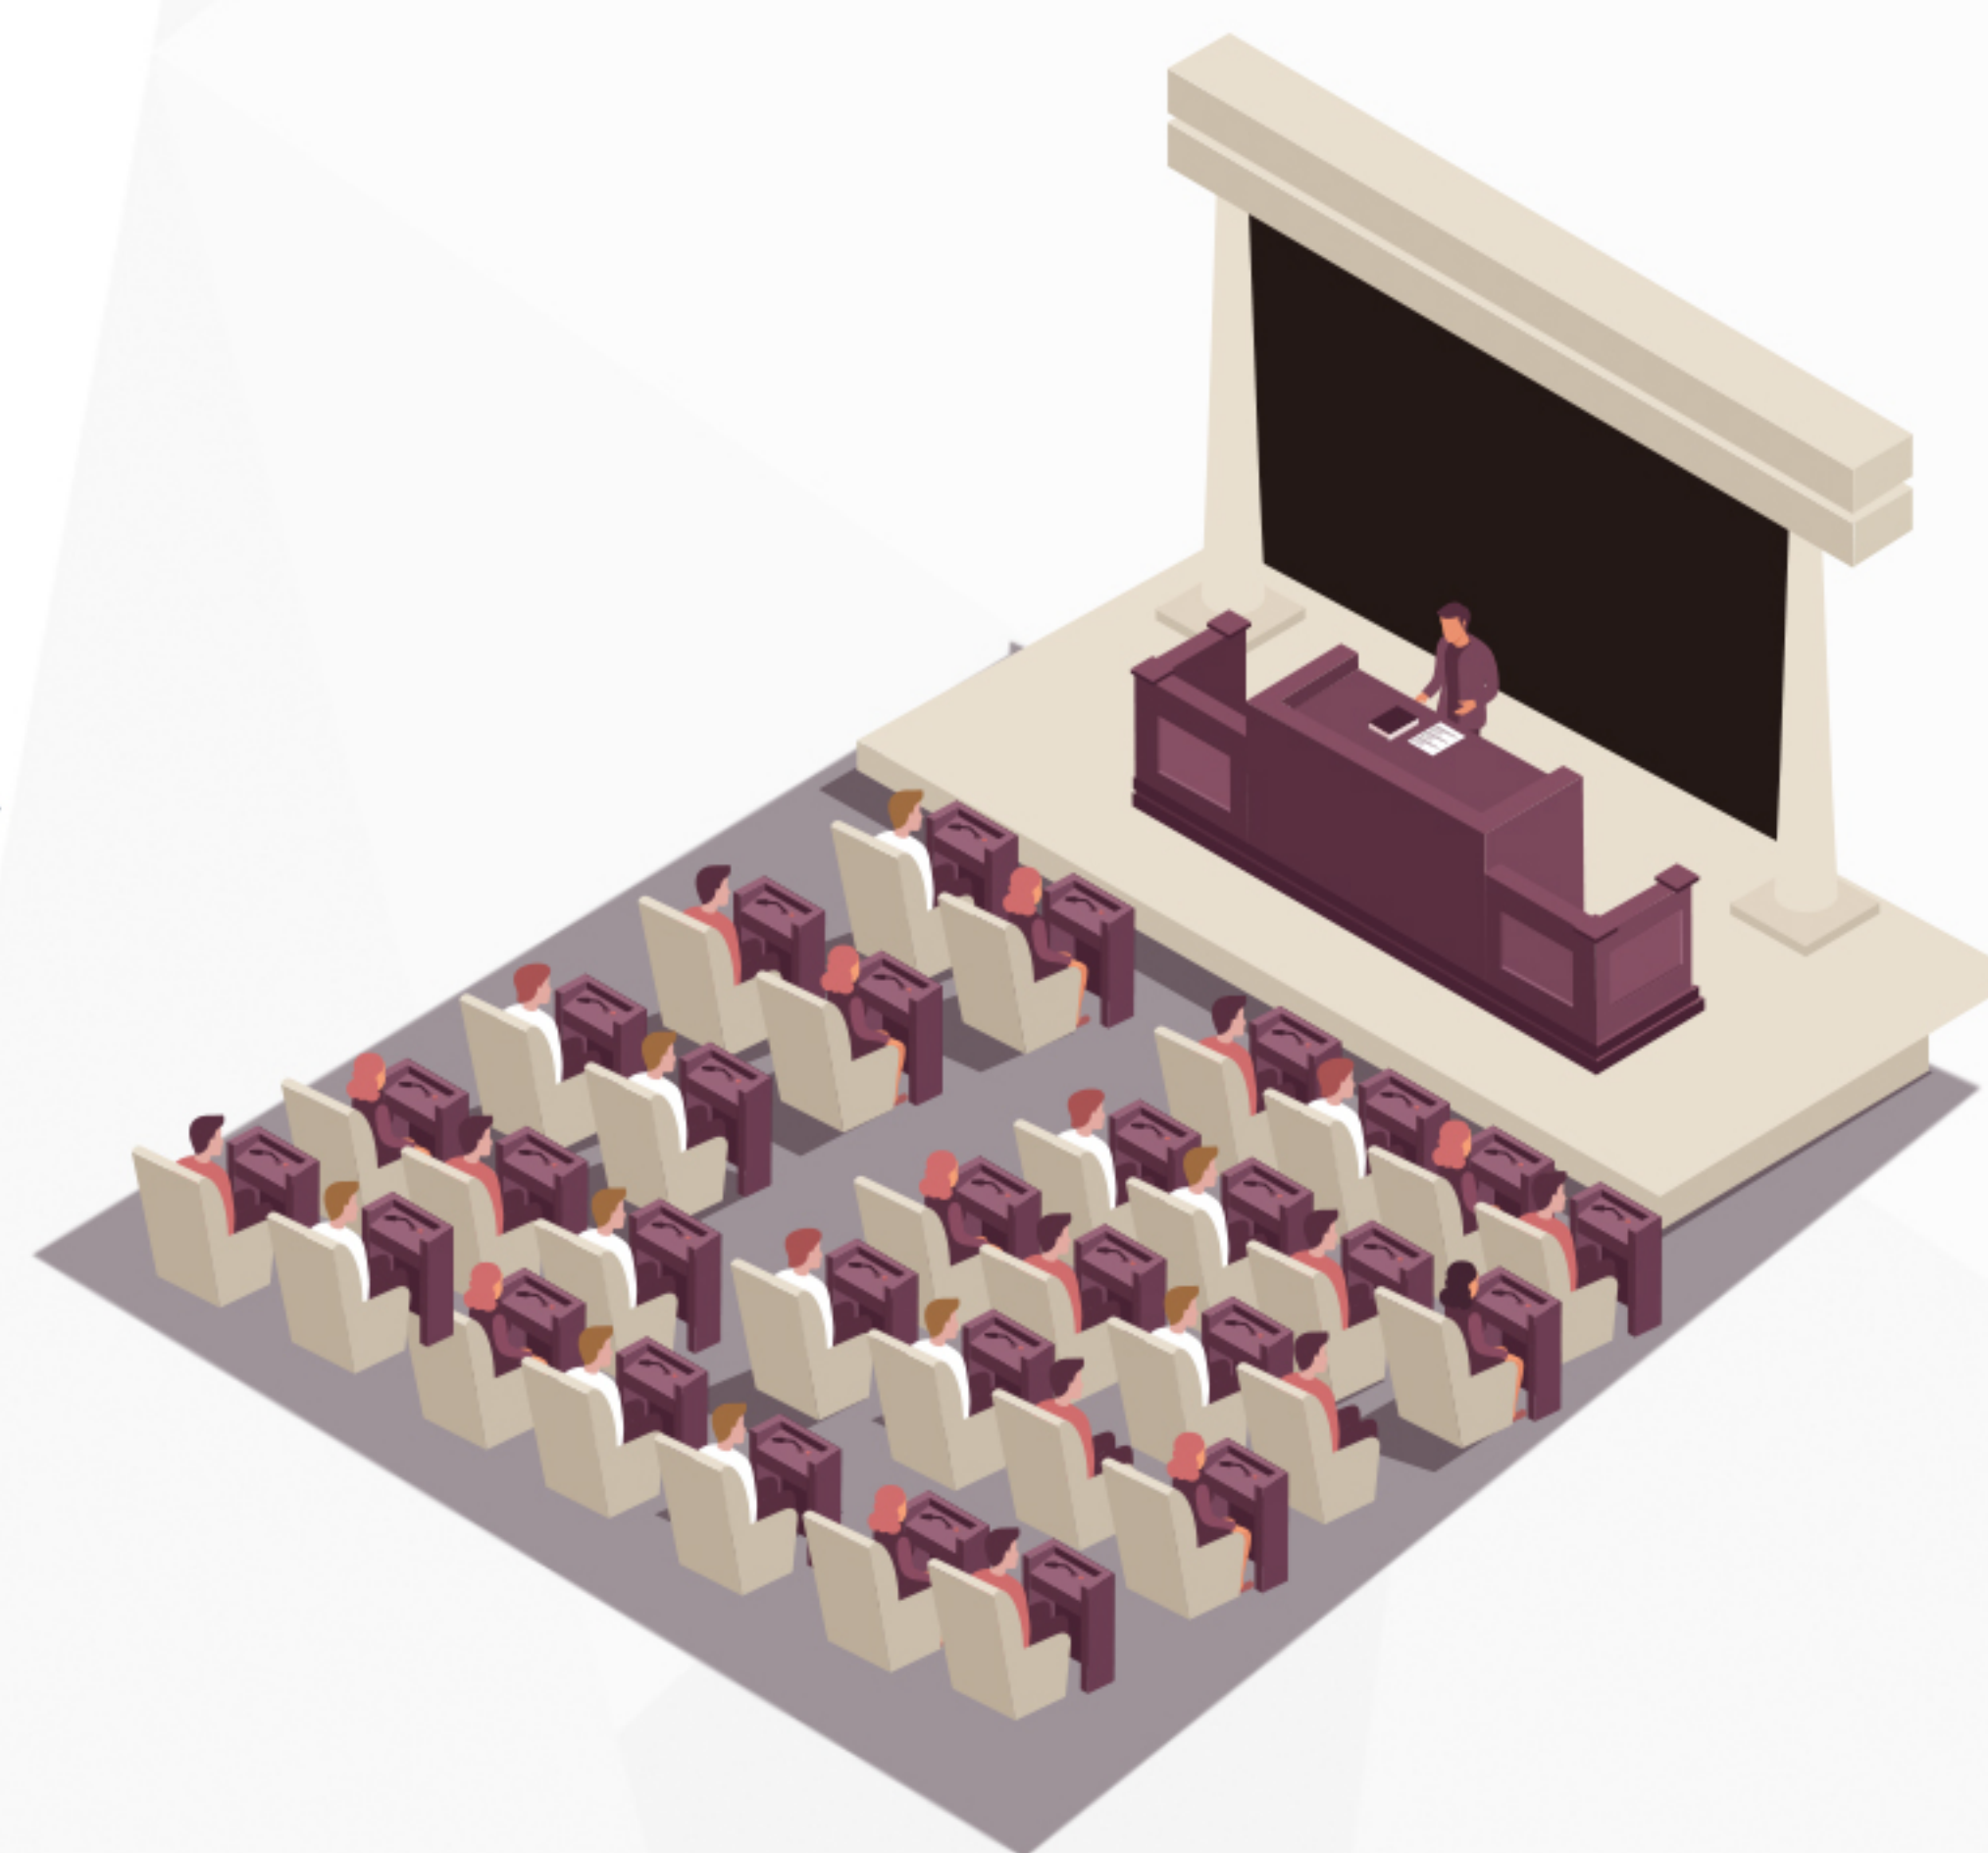

Vertical Installation



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.953	2.604	2.97	3.91
LED Lamp	SMD1515	SMD1515	SMD2020	SMD2020
Density (dots/m2)	262144	147456	112896	65536
Brightness	600-3000 nits	600-3000 nits	600-3000 nits	600-3000 nits
IP Rating	IP20	IP20	IP20	IP20
Cabinet Materiel	Die-casting Aluminum			
Scan	32 scan	32 scan	28 scan	16 scan
Module Weight	0.5 kg	0.5 kg	0.5 kg	0.5 kg
Cabinet Weight	4.8 kg	4.8 kg	4.8 kg	4.8 kg
Module Size (mm)	250*250	250*250	250*250	250*250
Cabinet Size (mm)	1000*250*40	1000*250*40	1000*250*40	1000*250*40
Module Pixel	128*128 dots	96*96 dots	84*84 dots	64*64 dots
Cabinet Pixel	512*128 dots	384*96 dots	336*84 dots	256*64 dots
Max Power	500 w/sqm	500 w/sqm	500 w/sqm	500 w/sqm
Average Power	165 w/sqm	165 w/sqm	165 w/sqm	165 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous / Asynchronous			
Gray Scale	16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10% ~50%			
Work Temperature	-20 ~ + 50°C			

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display