



FC Model

Outdoor Fixed Front And Back Service Design



ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Different **M**odules Use **S**ame **HUB**

Customize The Box Size
According To The Display Size



L*H: 250*250(mm)

Module



L*H: 500*500(mm)

Cabinet



L*H: 500*750(mm)



L*H: 500*1000(mm)

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display




Multiple **A**ngles, **M**ore **P**ossibility

It can be installed directly without steel structure



Curved Version

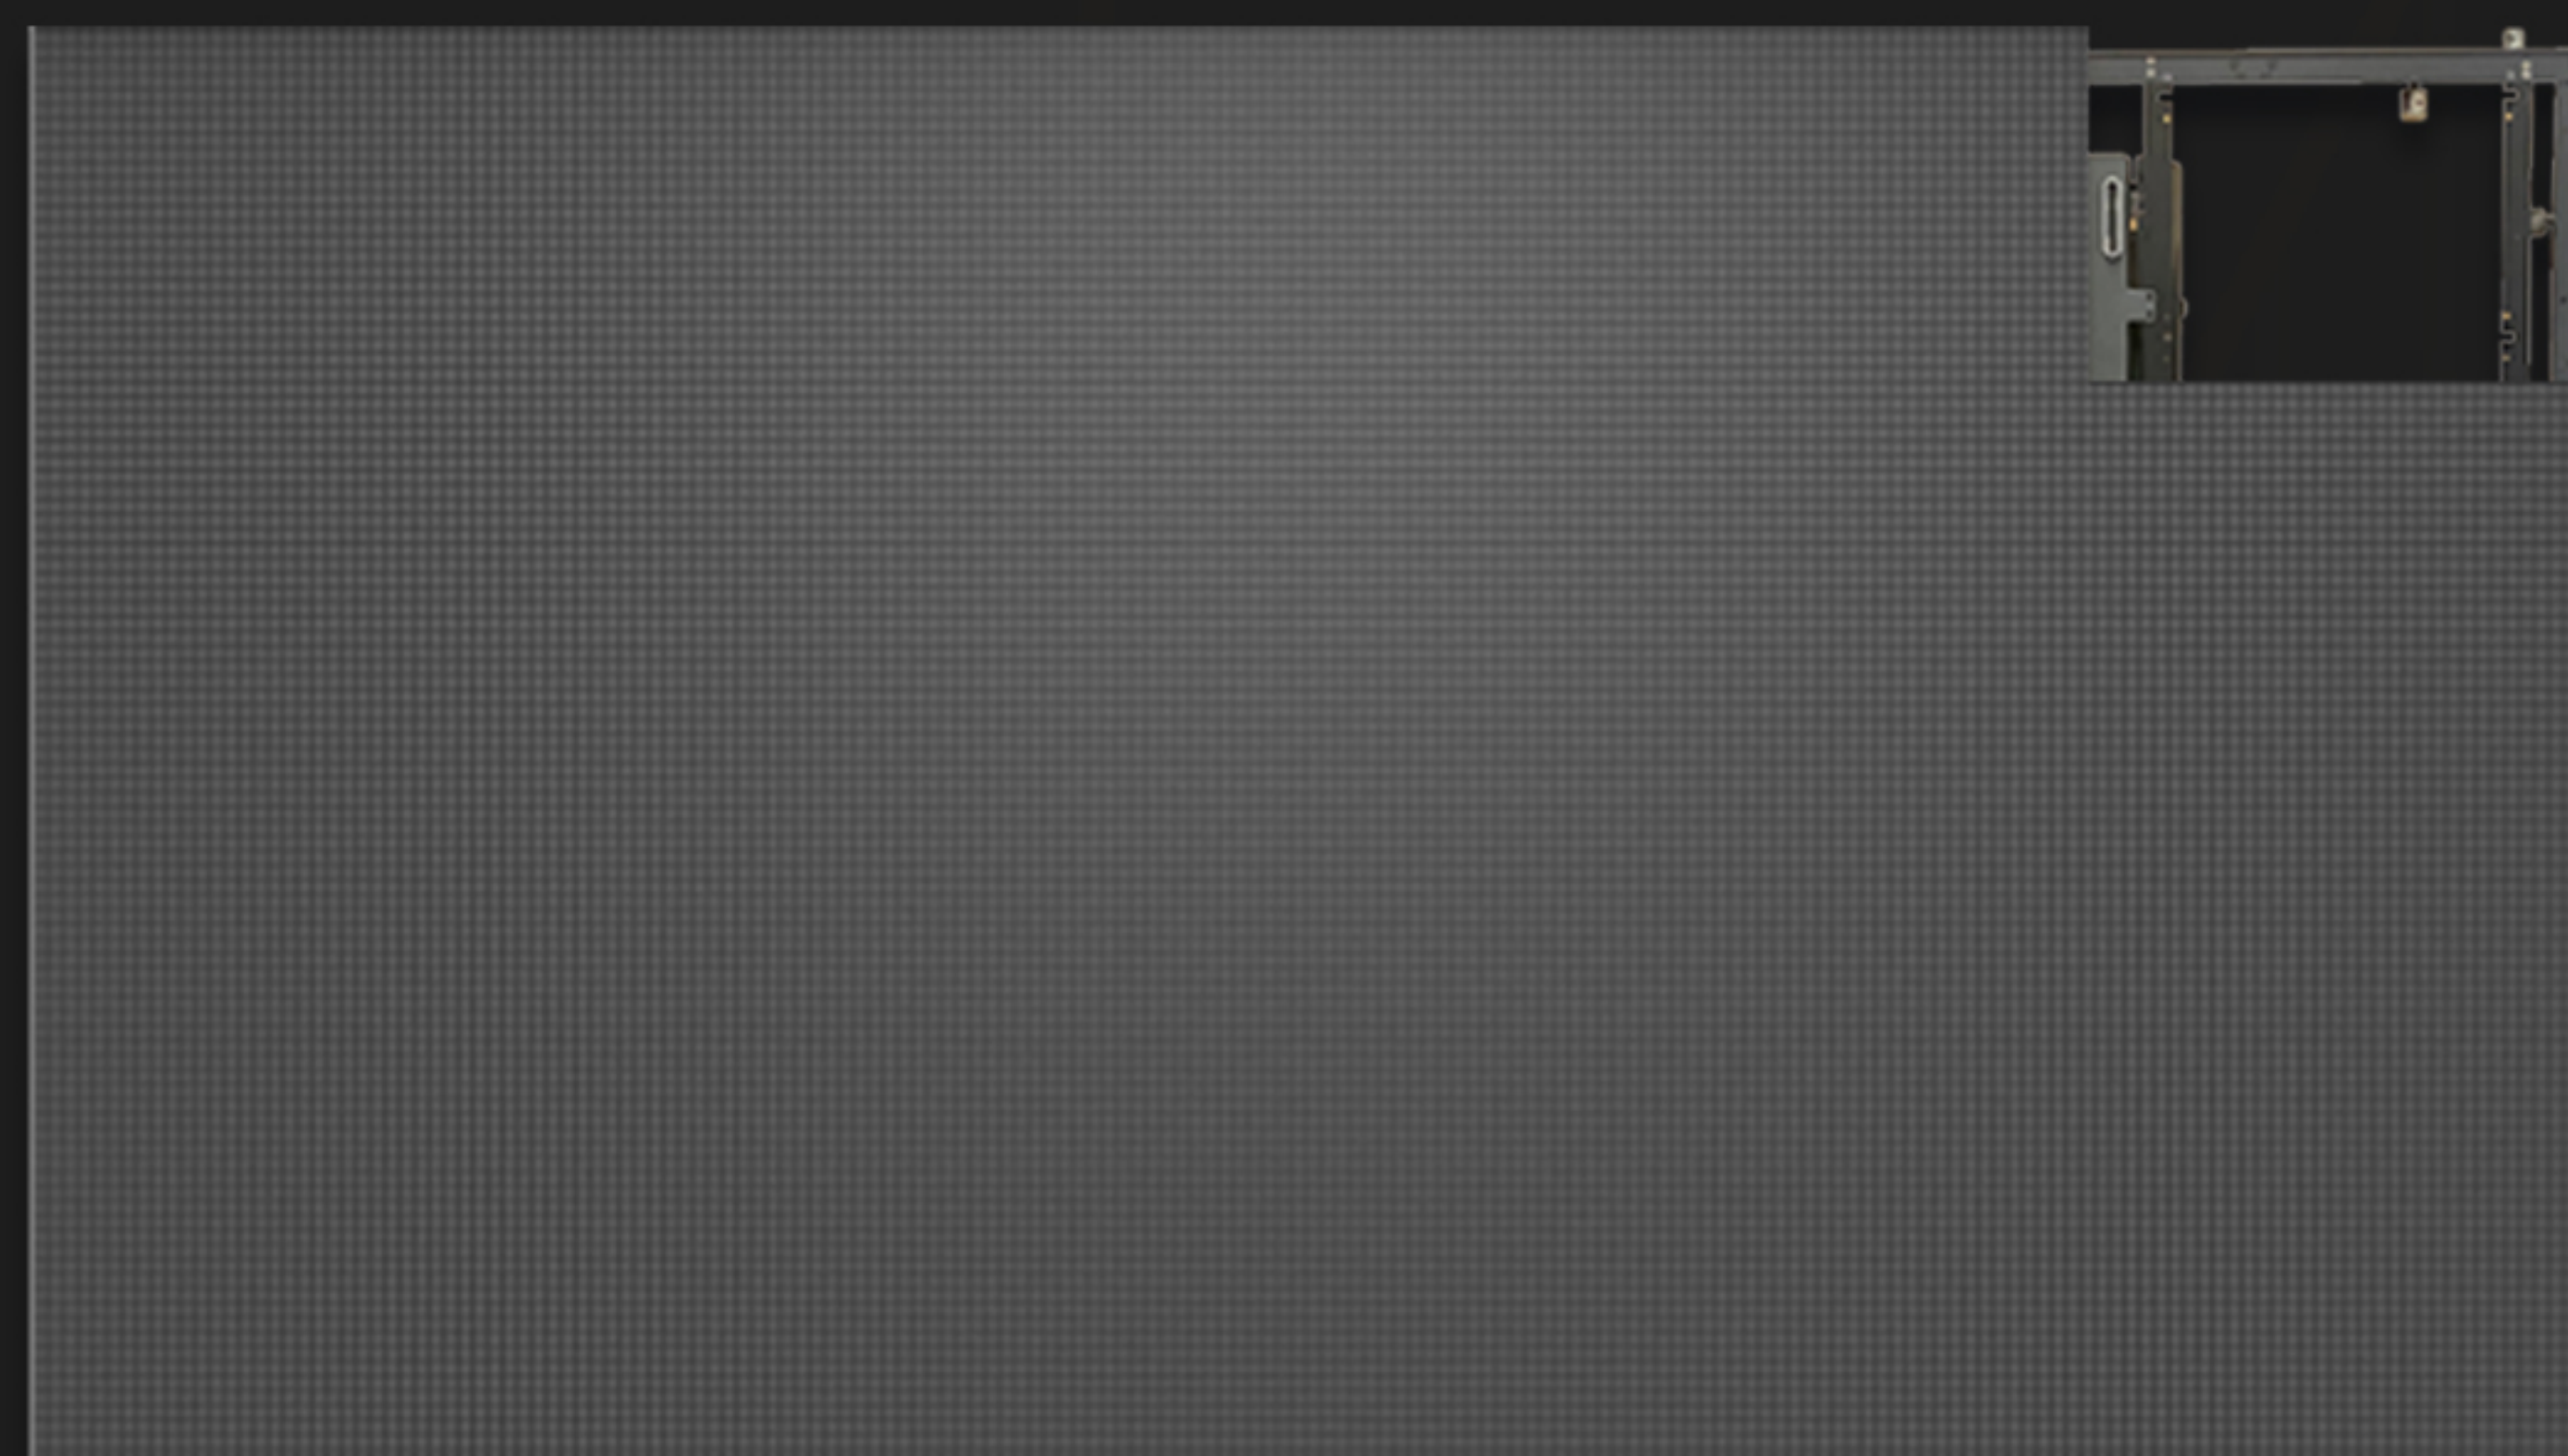

ENBON GROUP
Spirit & Success, **T**ogether



Enbon



Enbon **L**ed Display

EnBon

High Refresh Rate

High Grayscale



Low Refresh Rate



High Refresh Rate




Low Grayscale



High Grayscale




Product Details

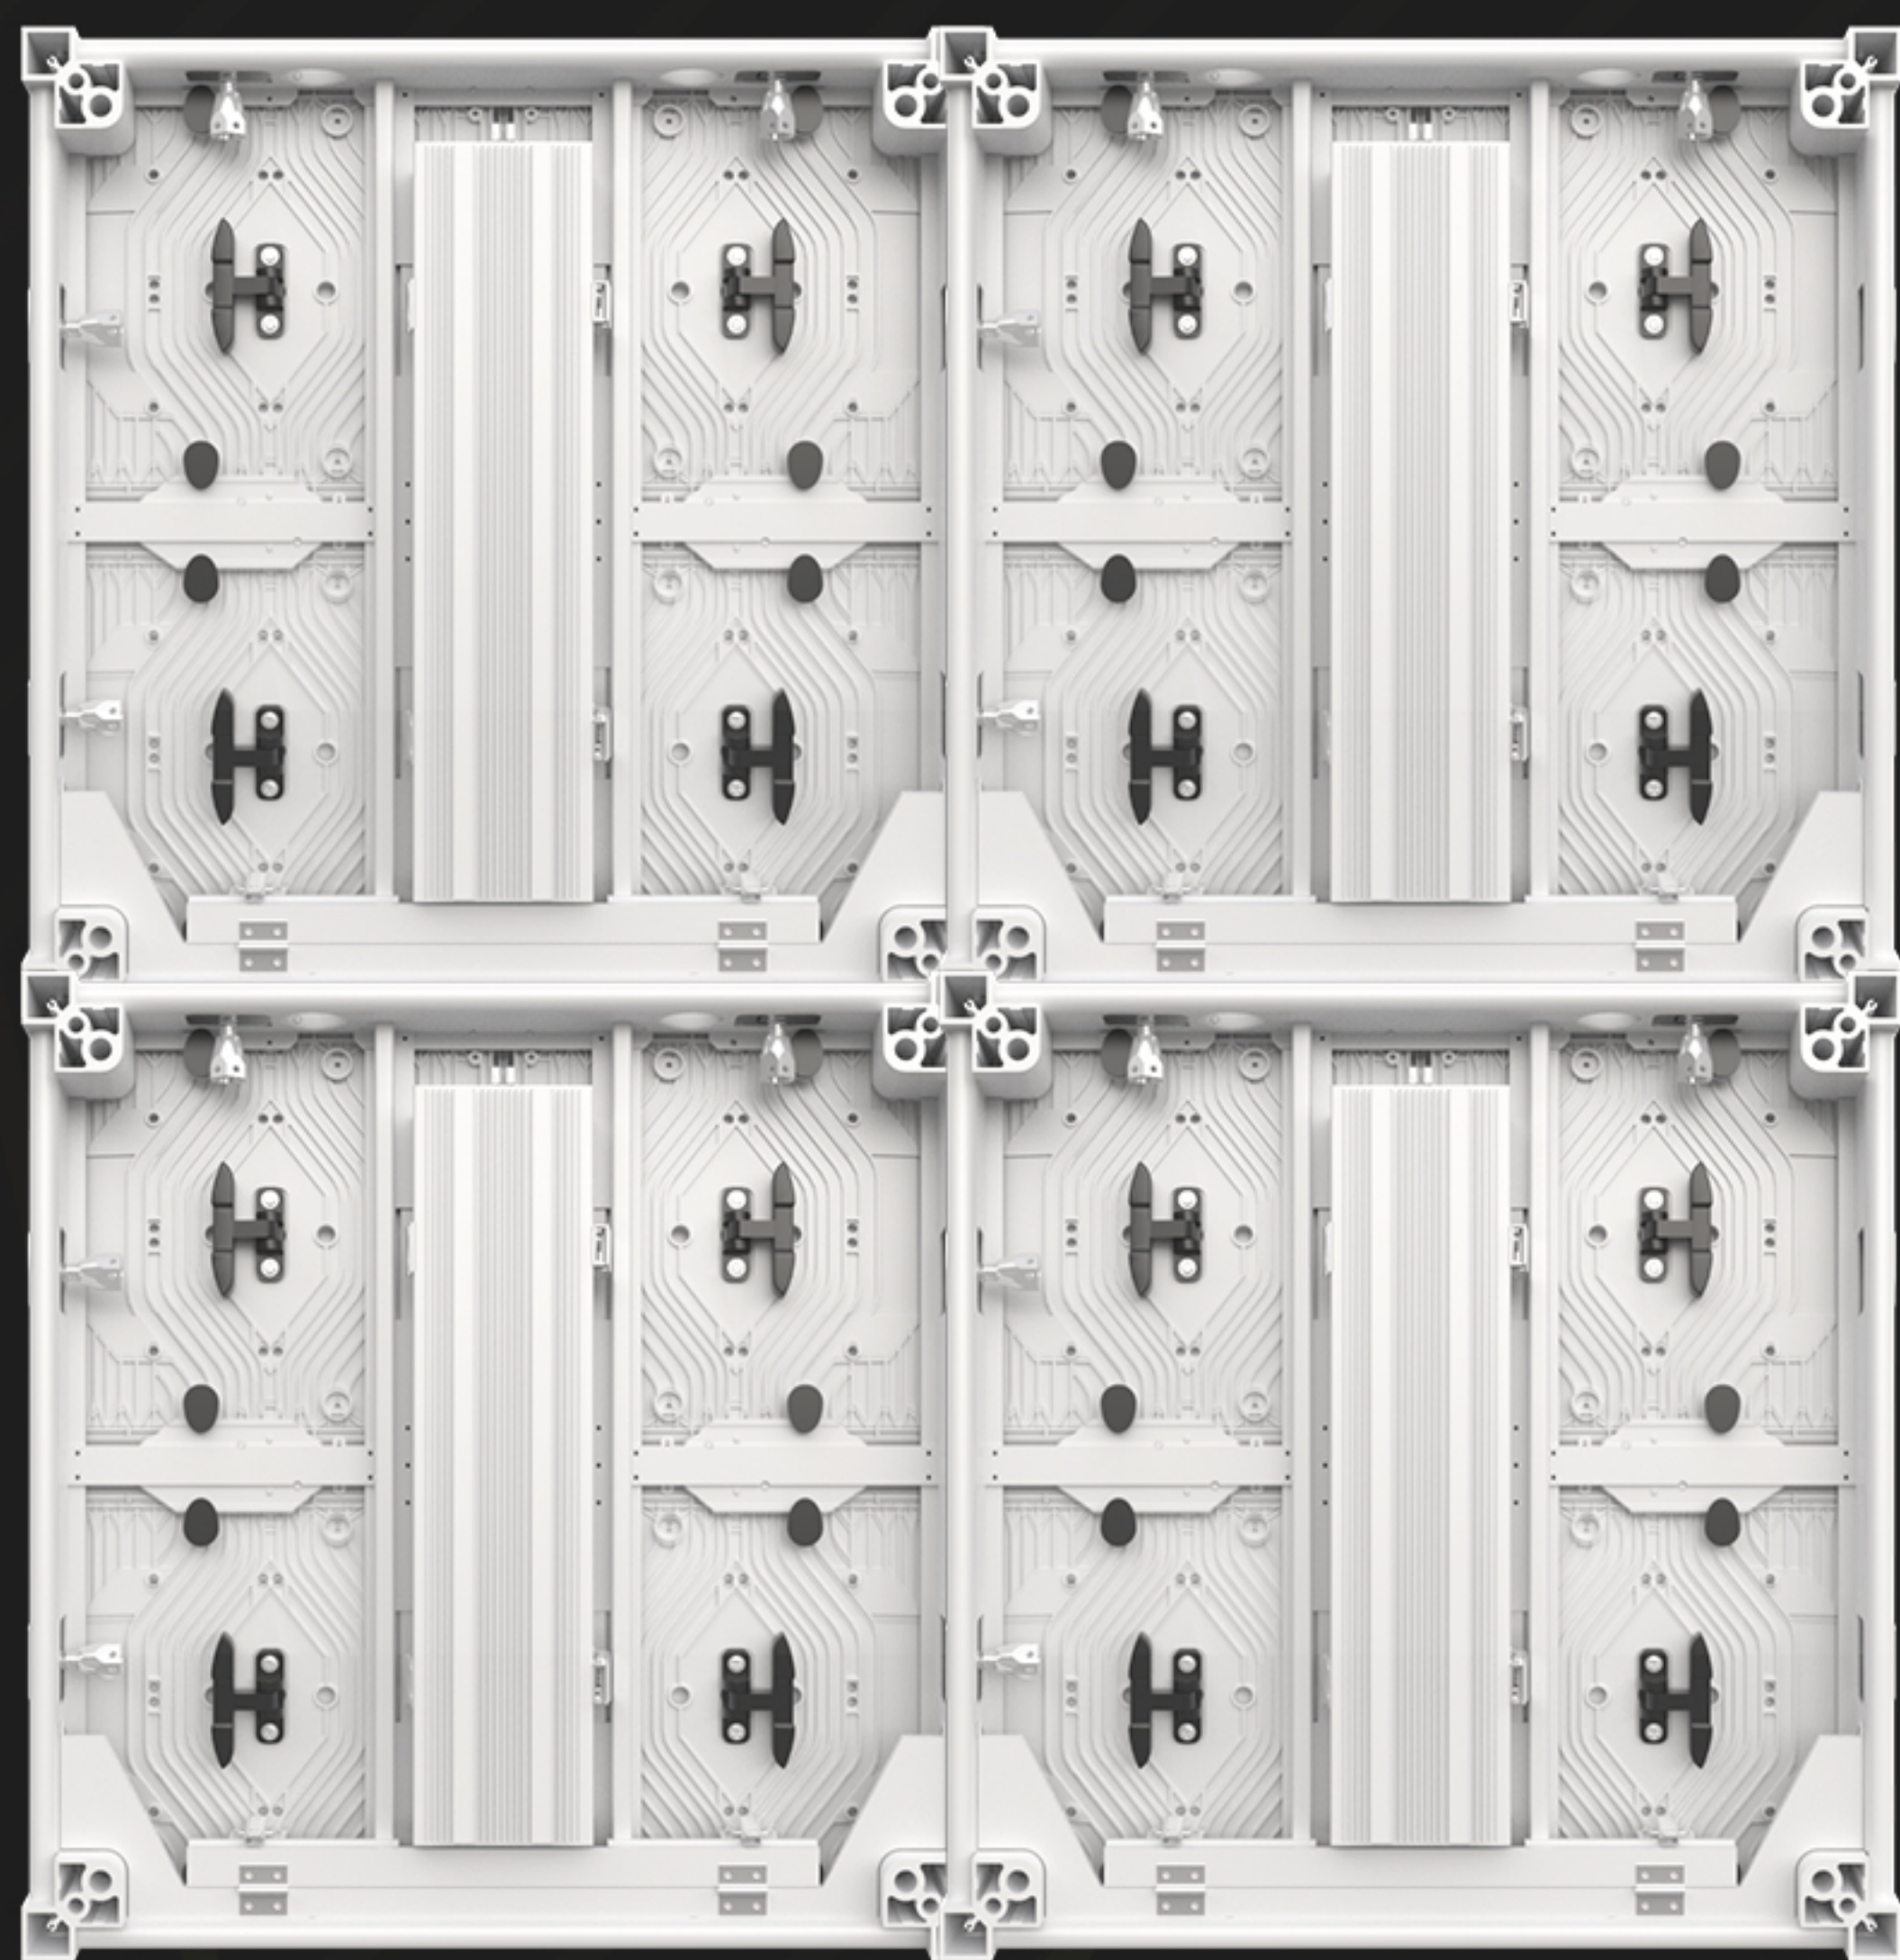

Can Do Seamless Splicing




Magnetic Type

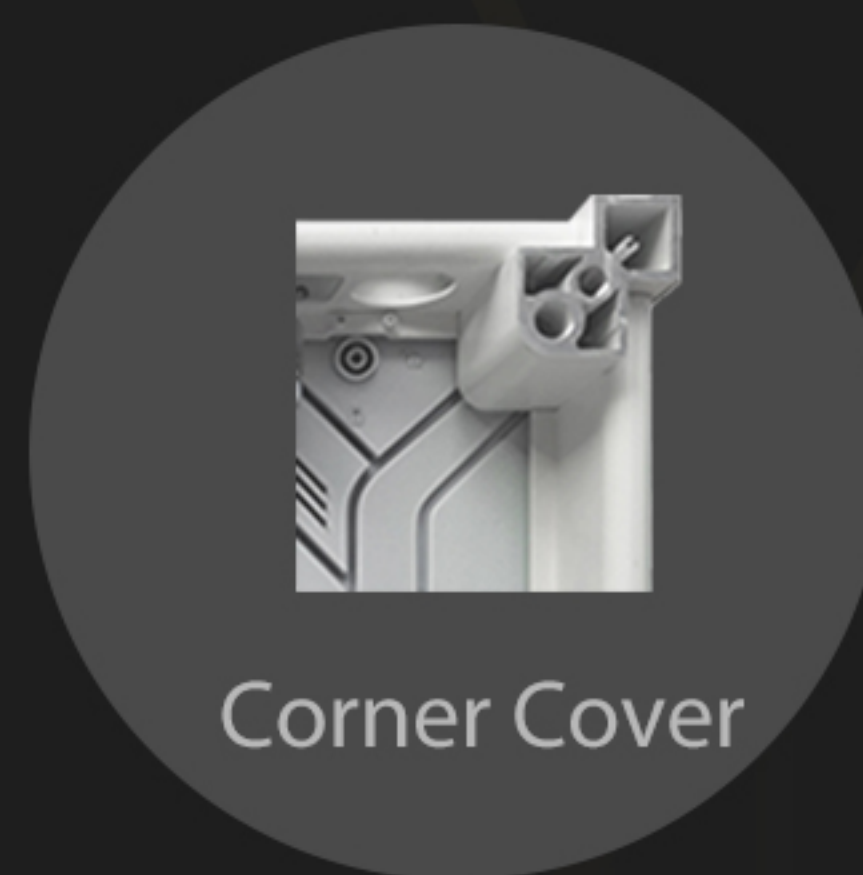

Corner Cover



Power Box

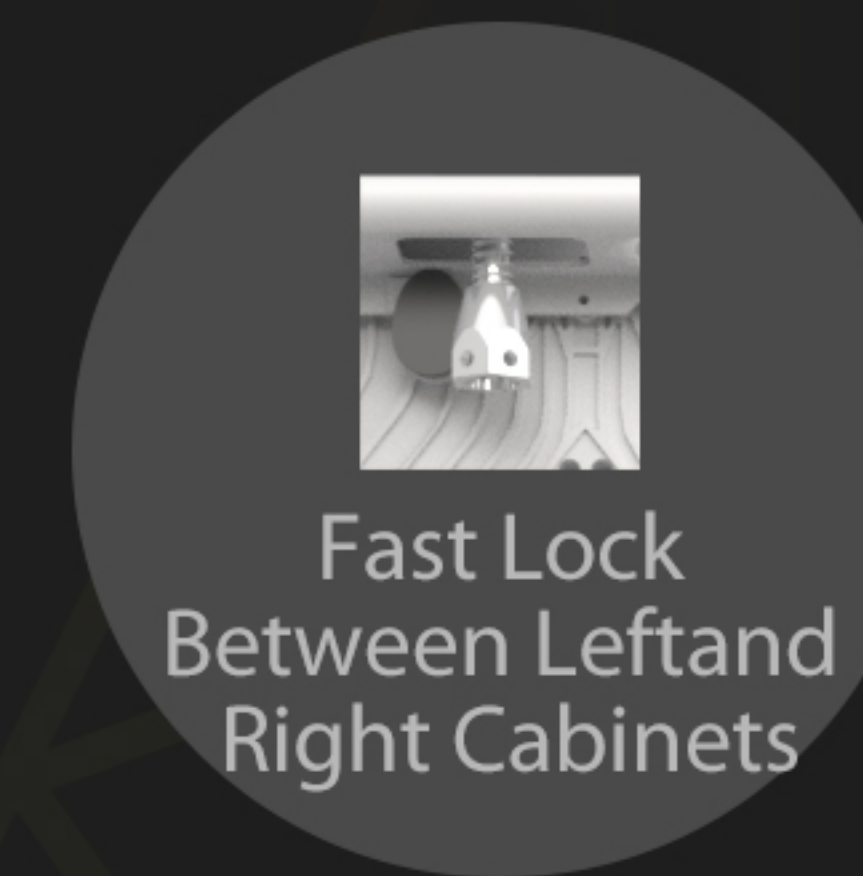

Fast Lock
Between Left and
Right Cabinets




Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation

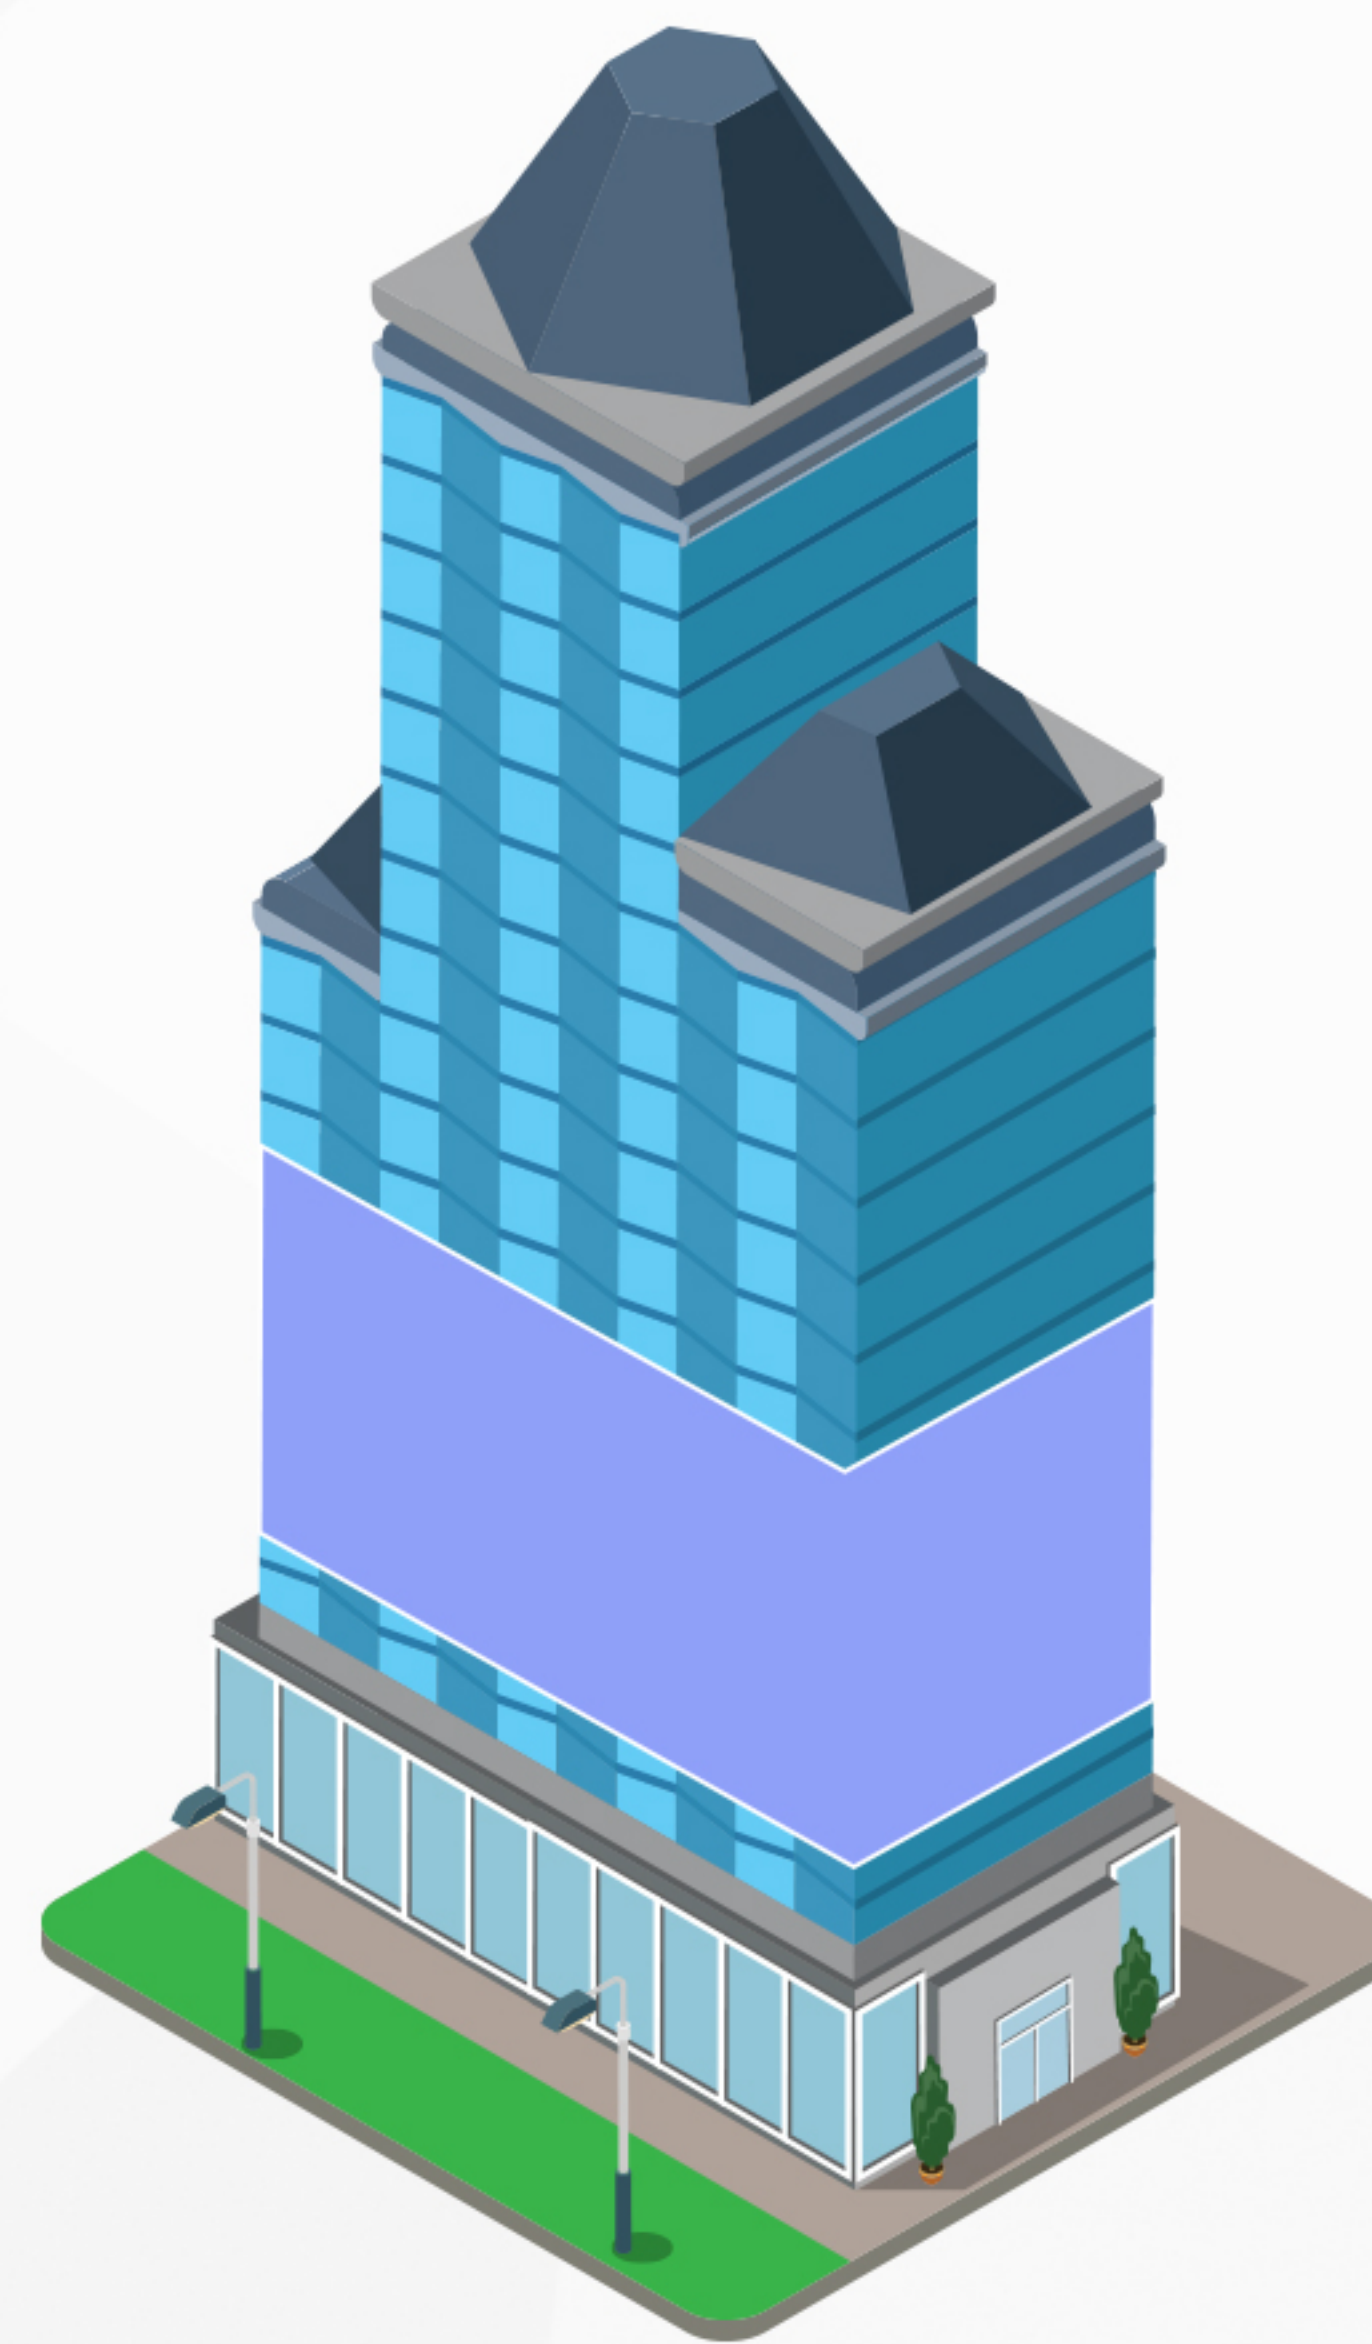


Vertical Installation



Front **And** Rear Installation **And** Maintenance

Front and rear installation and maintenance, flexible installation and convenient maintenance

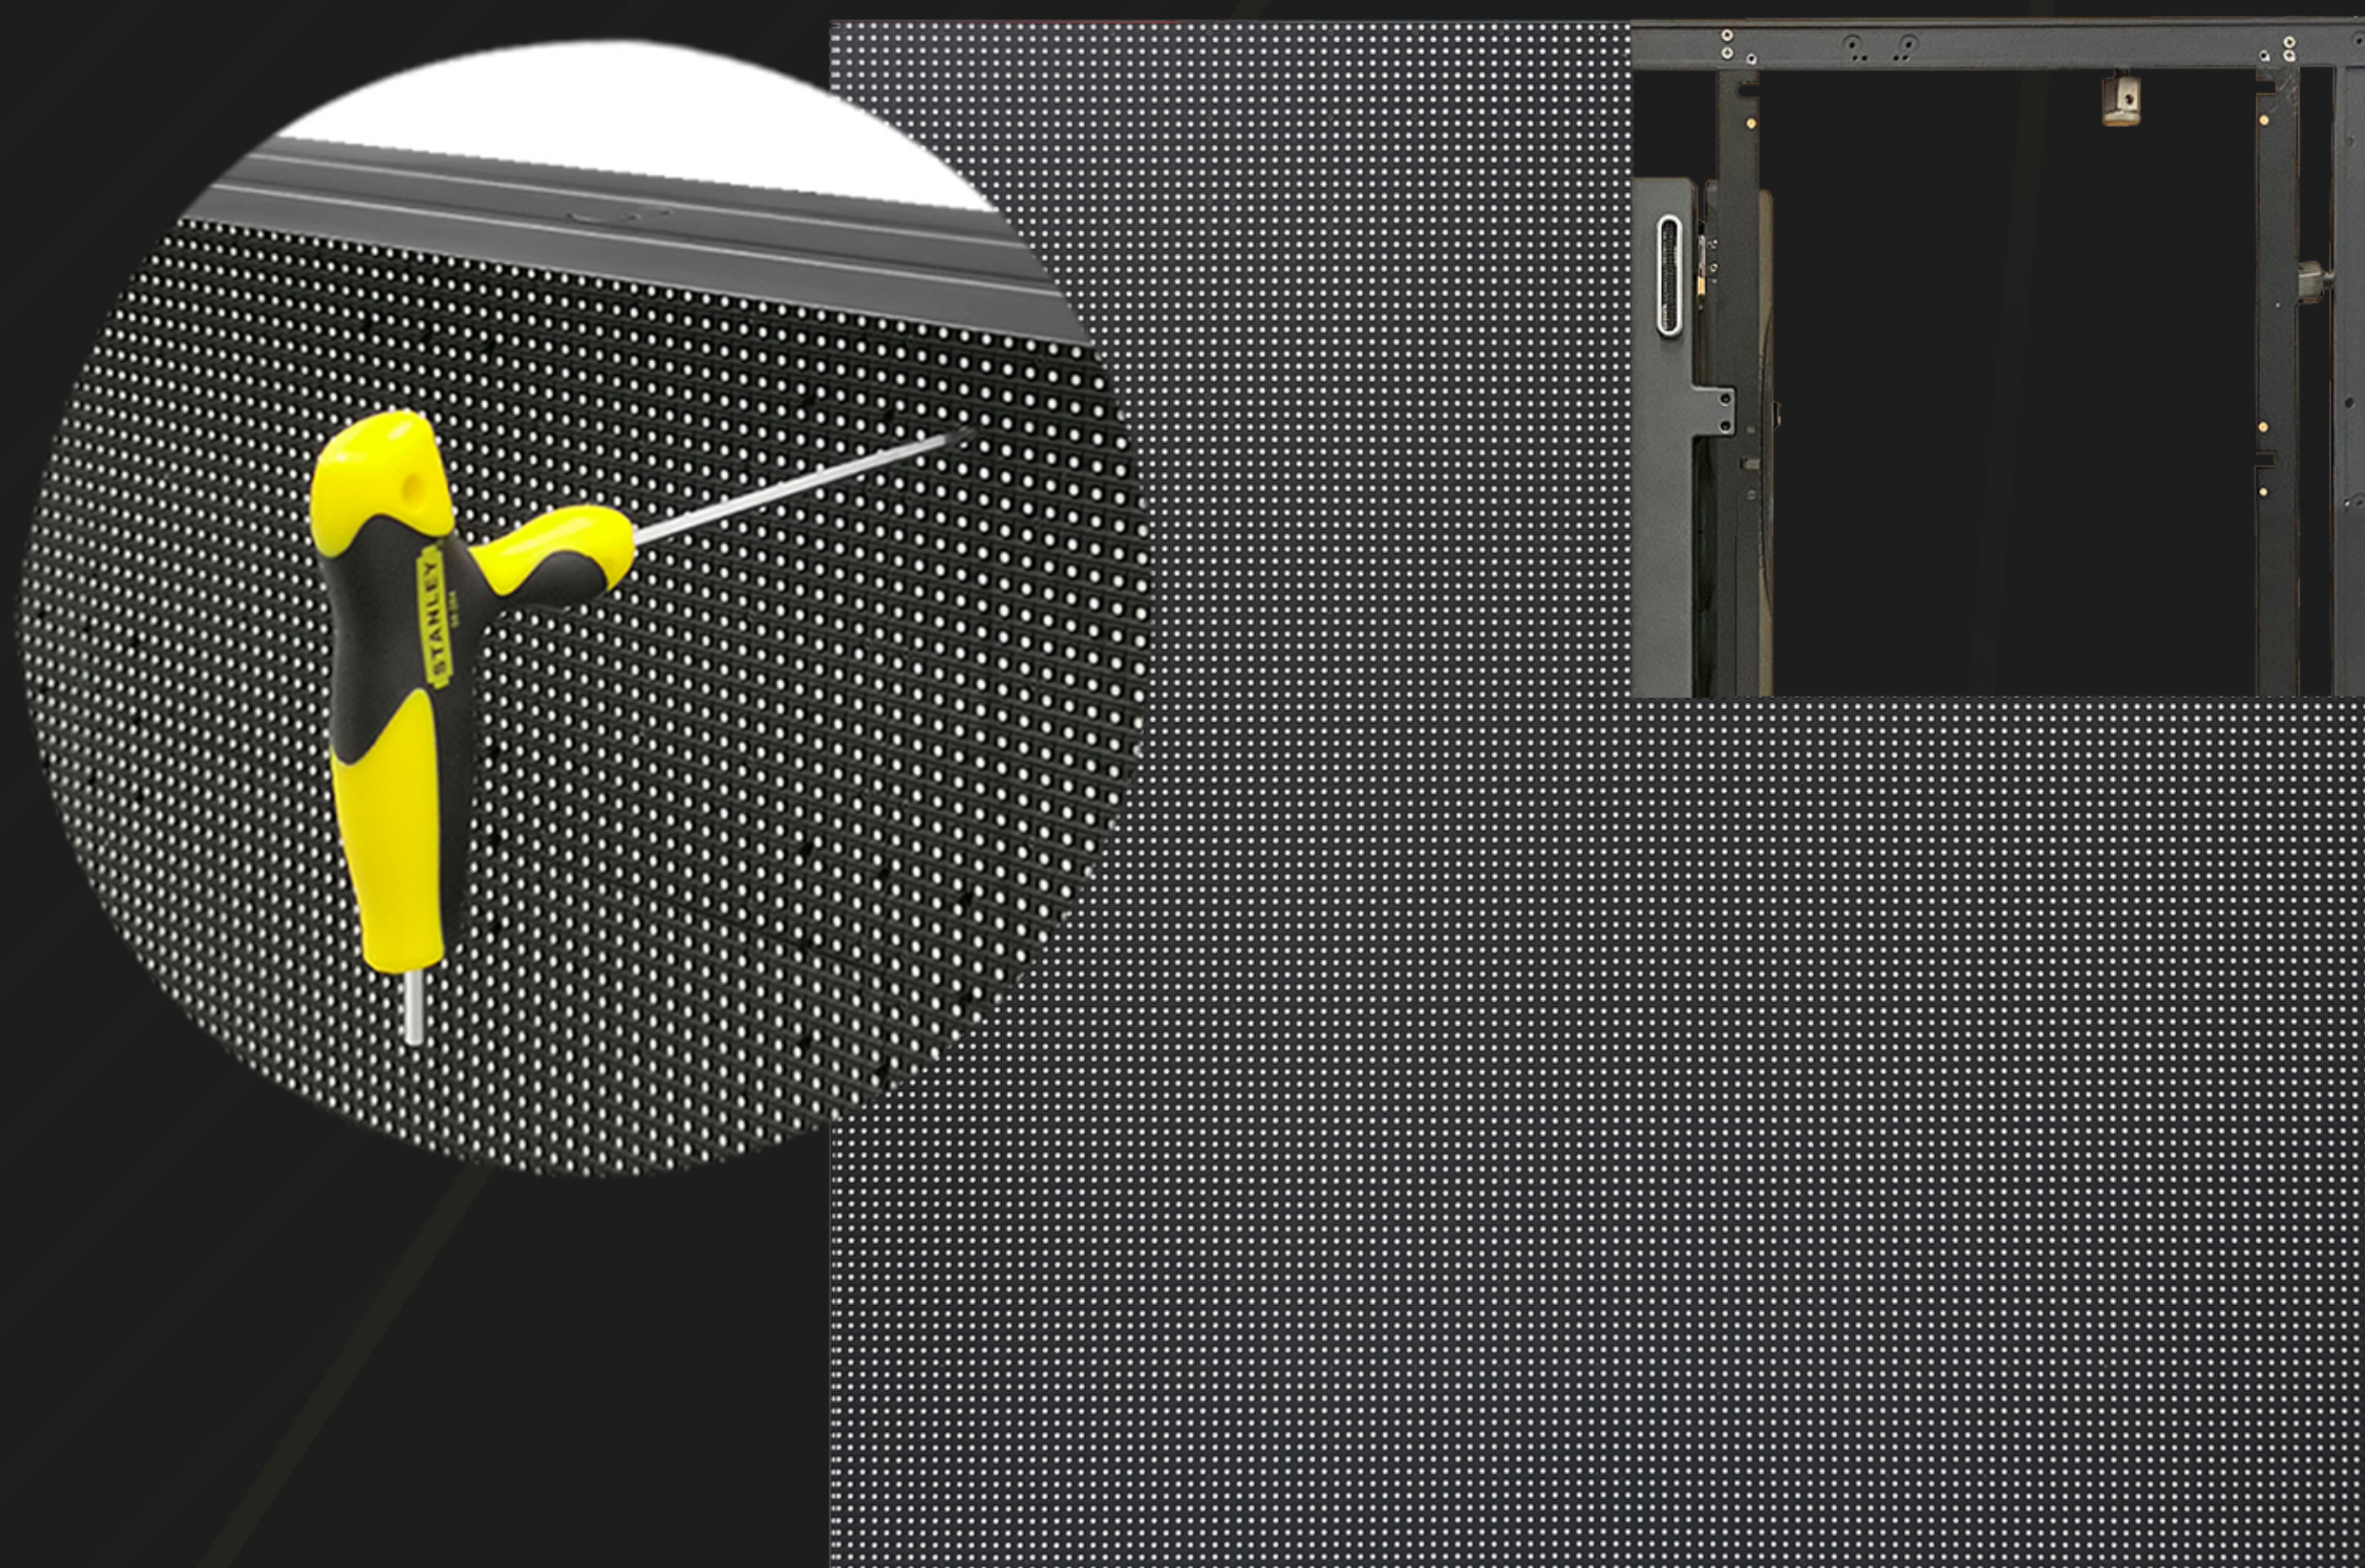

Fixed Installation

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Extremely **Light And Thin**



① Lightweight Cabinet **8kg**

② **Aluminum** Profile

ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display



Low Power Consumption

Compared with similar products on the market, it saves 30% power

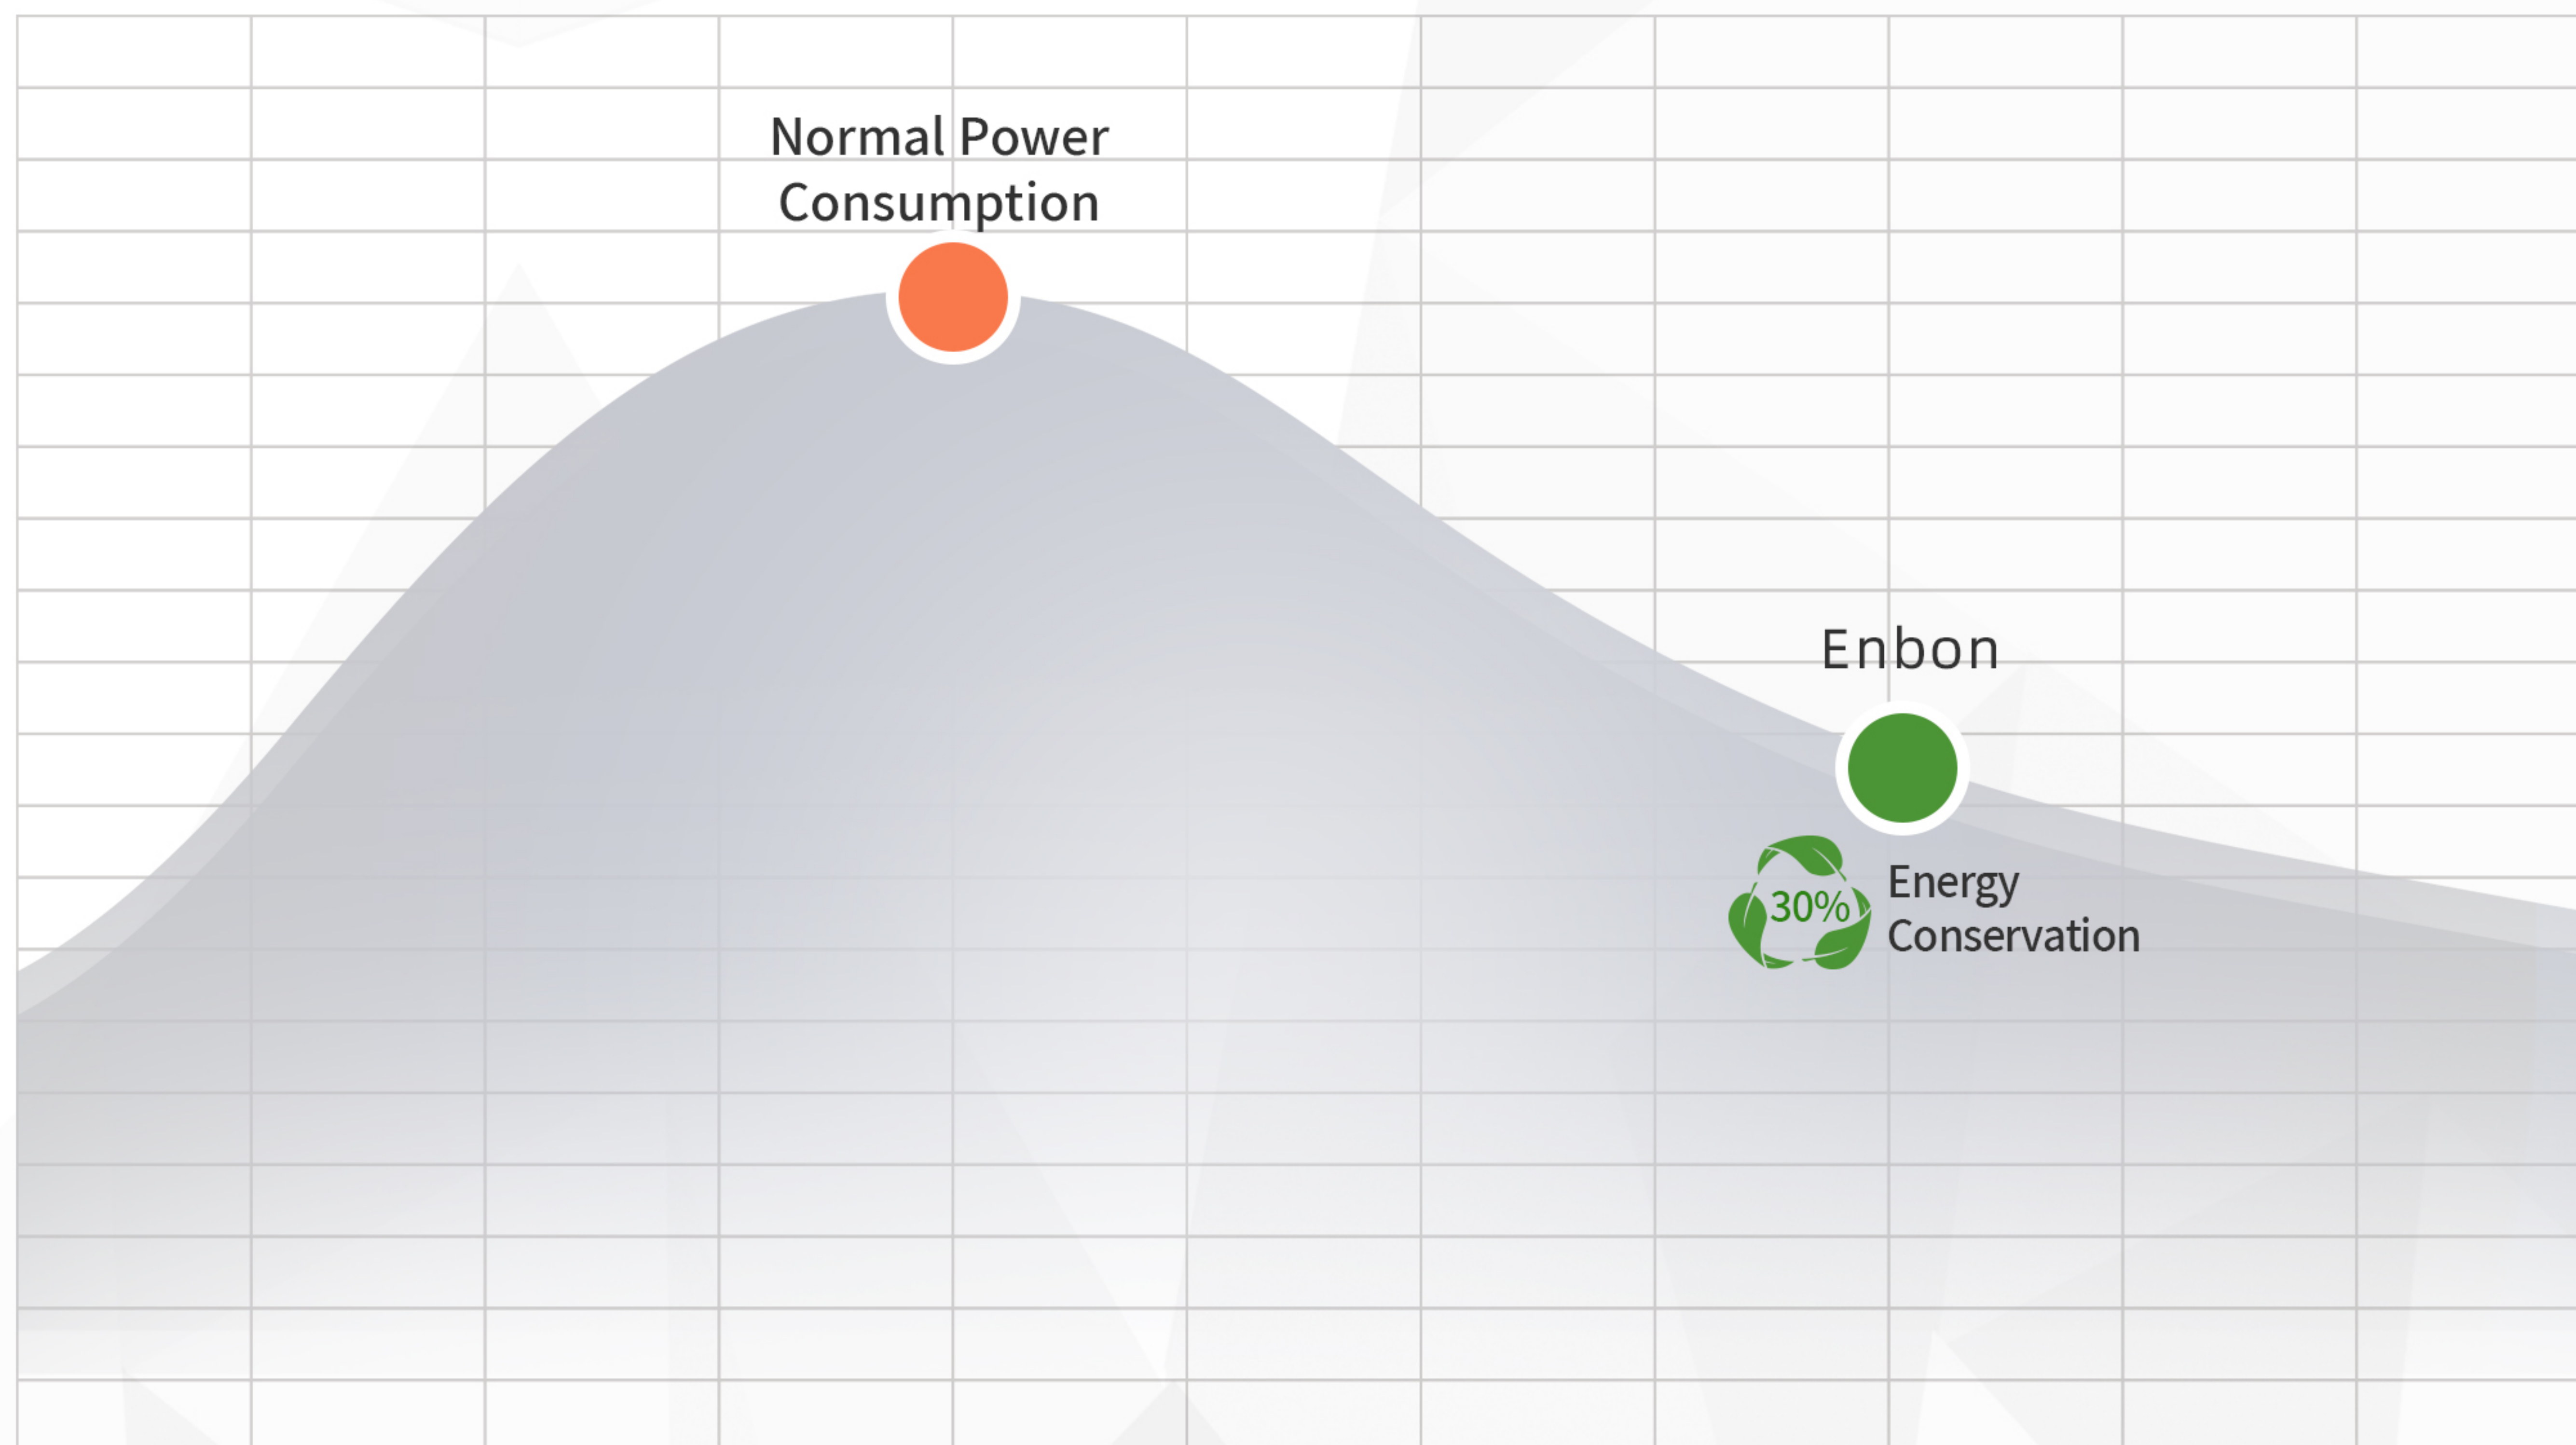



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.95	2.604	2.97	3.91
LED Lamp	SMD1415	SMD1415	SMD1415	SMD1921
Density (dots/m²)	262144	147456	112896	65536
Brightness	≥4500 nits	≥4500 nits	≥4500 nits	≥6000 nits
IP Rating	IP65	IP65	IP65	IP65
Cabinet Materiel	Aluminum Profile			
Scan	32 scan	24 scan	21 scan	8 scan
Module Weight	1 kg	1 kg	1 kg	1 kg
Cabinet Weight	8 kg	8 kg	8 kg	8 kg
Module Size (mm)	250*250	250*250V	250*250	250*250
Cabinet Size (mm)	500*500*85	500*500*85	500*500*85	500*500*85
Module Pixel	128*128 dots	96*96 dots	84*84 dots	64*64 dots
Cabinet Pixel	256*256 dots	192*192 dots	168*168 dots	128*128 dots
Max Power	550 w/sqm	550 w/sqm	550 w/sqm	650 w/sqm
Average Power	185 w/sqm	185 w/sqm	185 w/sqm	216 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous/ Asynchronous			
Gray Scale	16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10%~90%			
Work Temperature	-20 ~ + 65℃			

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display