




FN Model

Small Pitch Cabinet Full Front Service

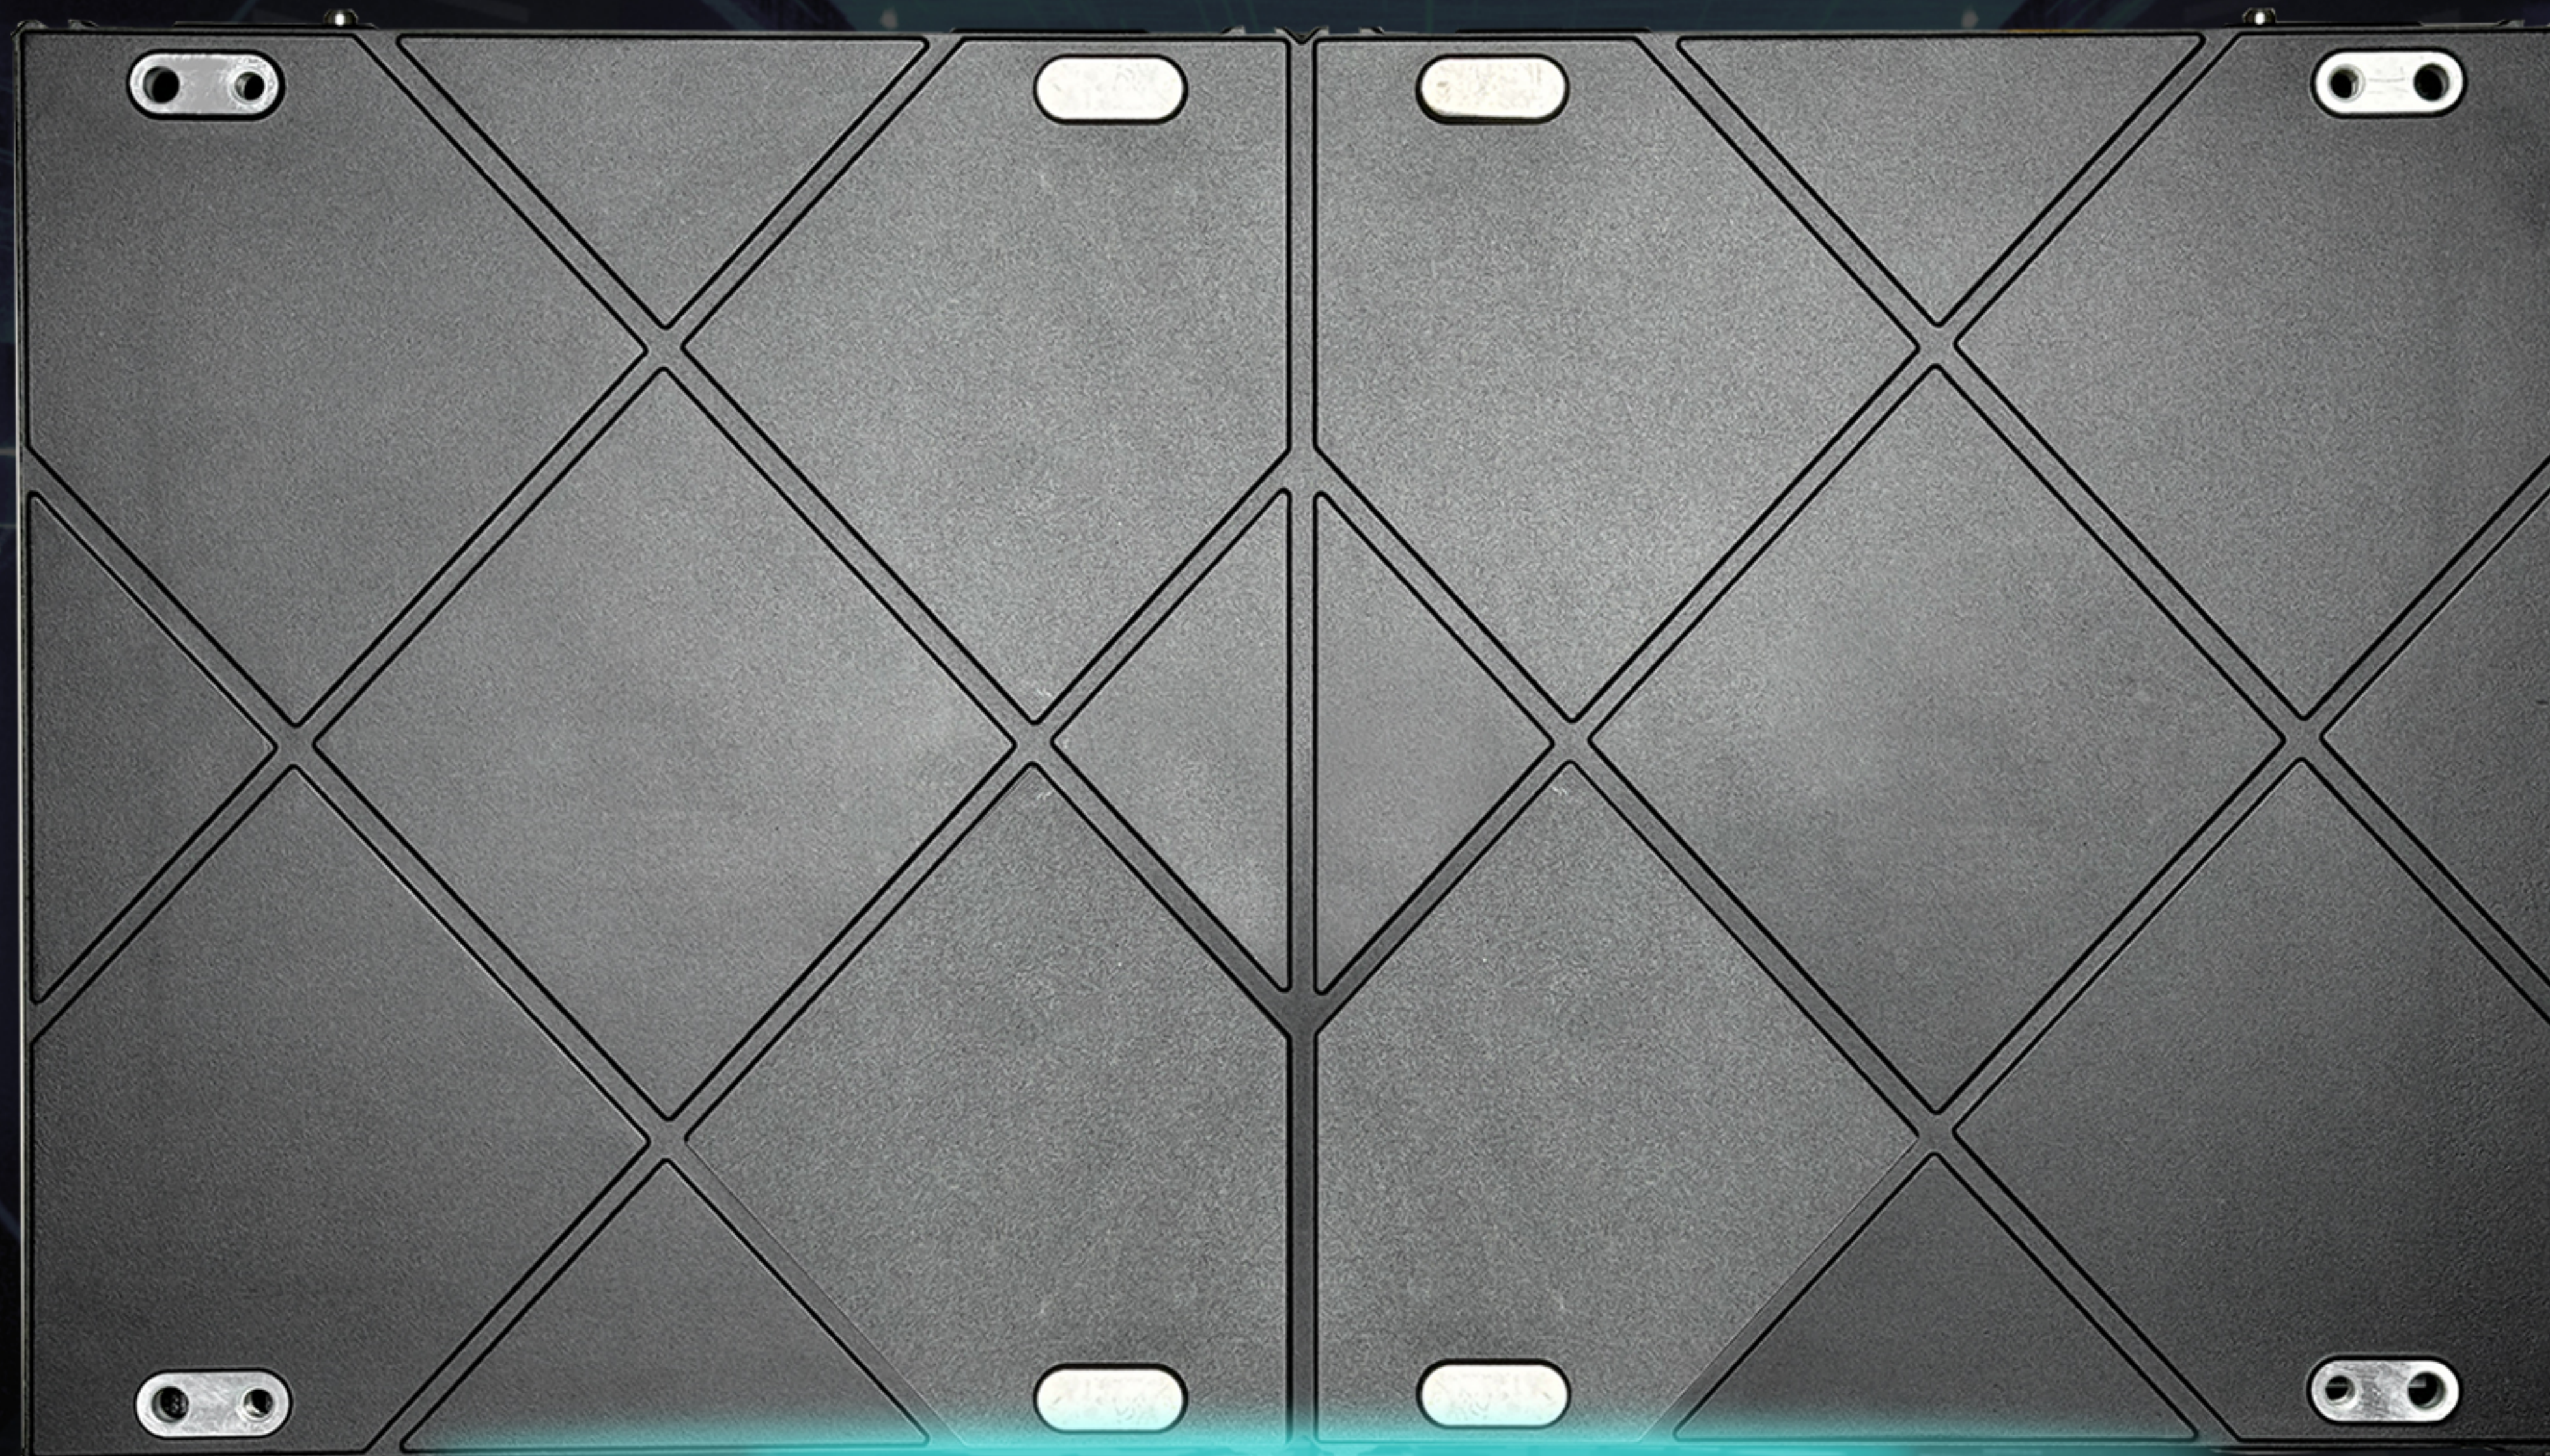

ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display



Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move

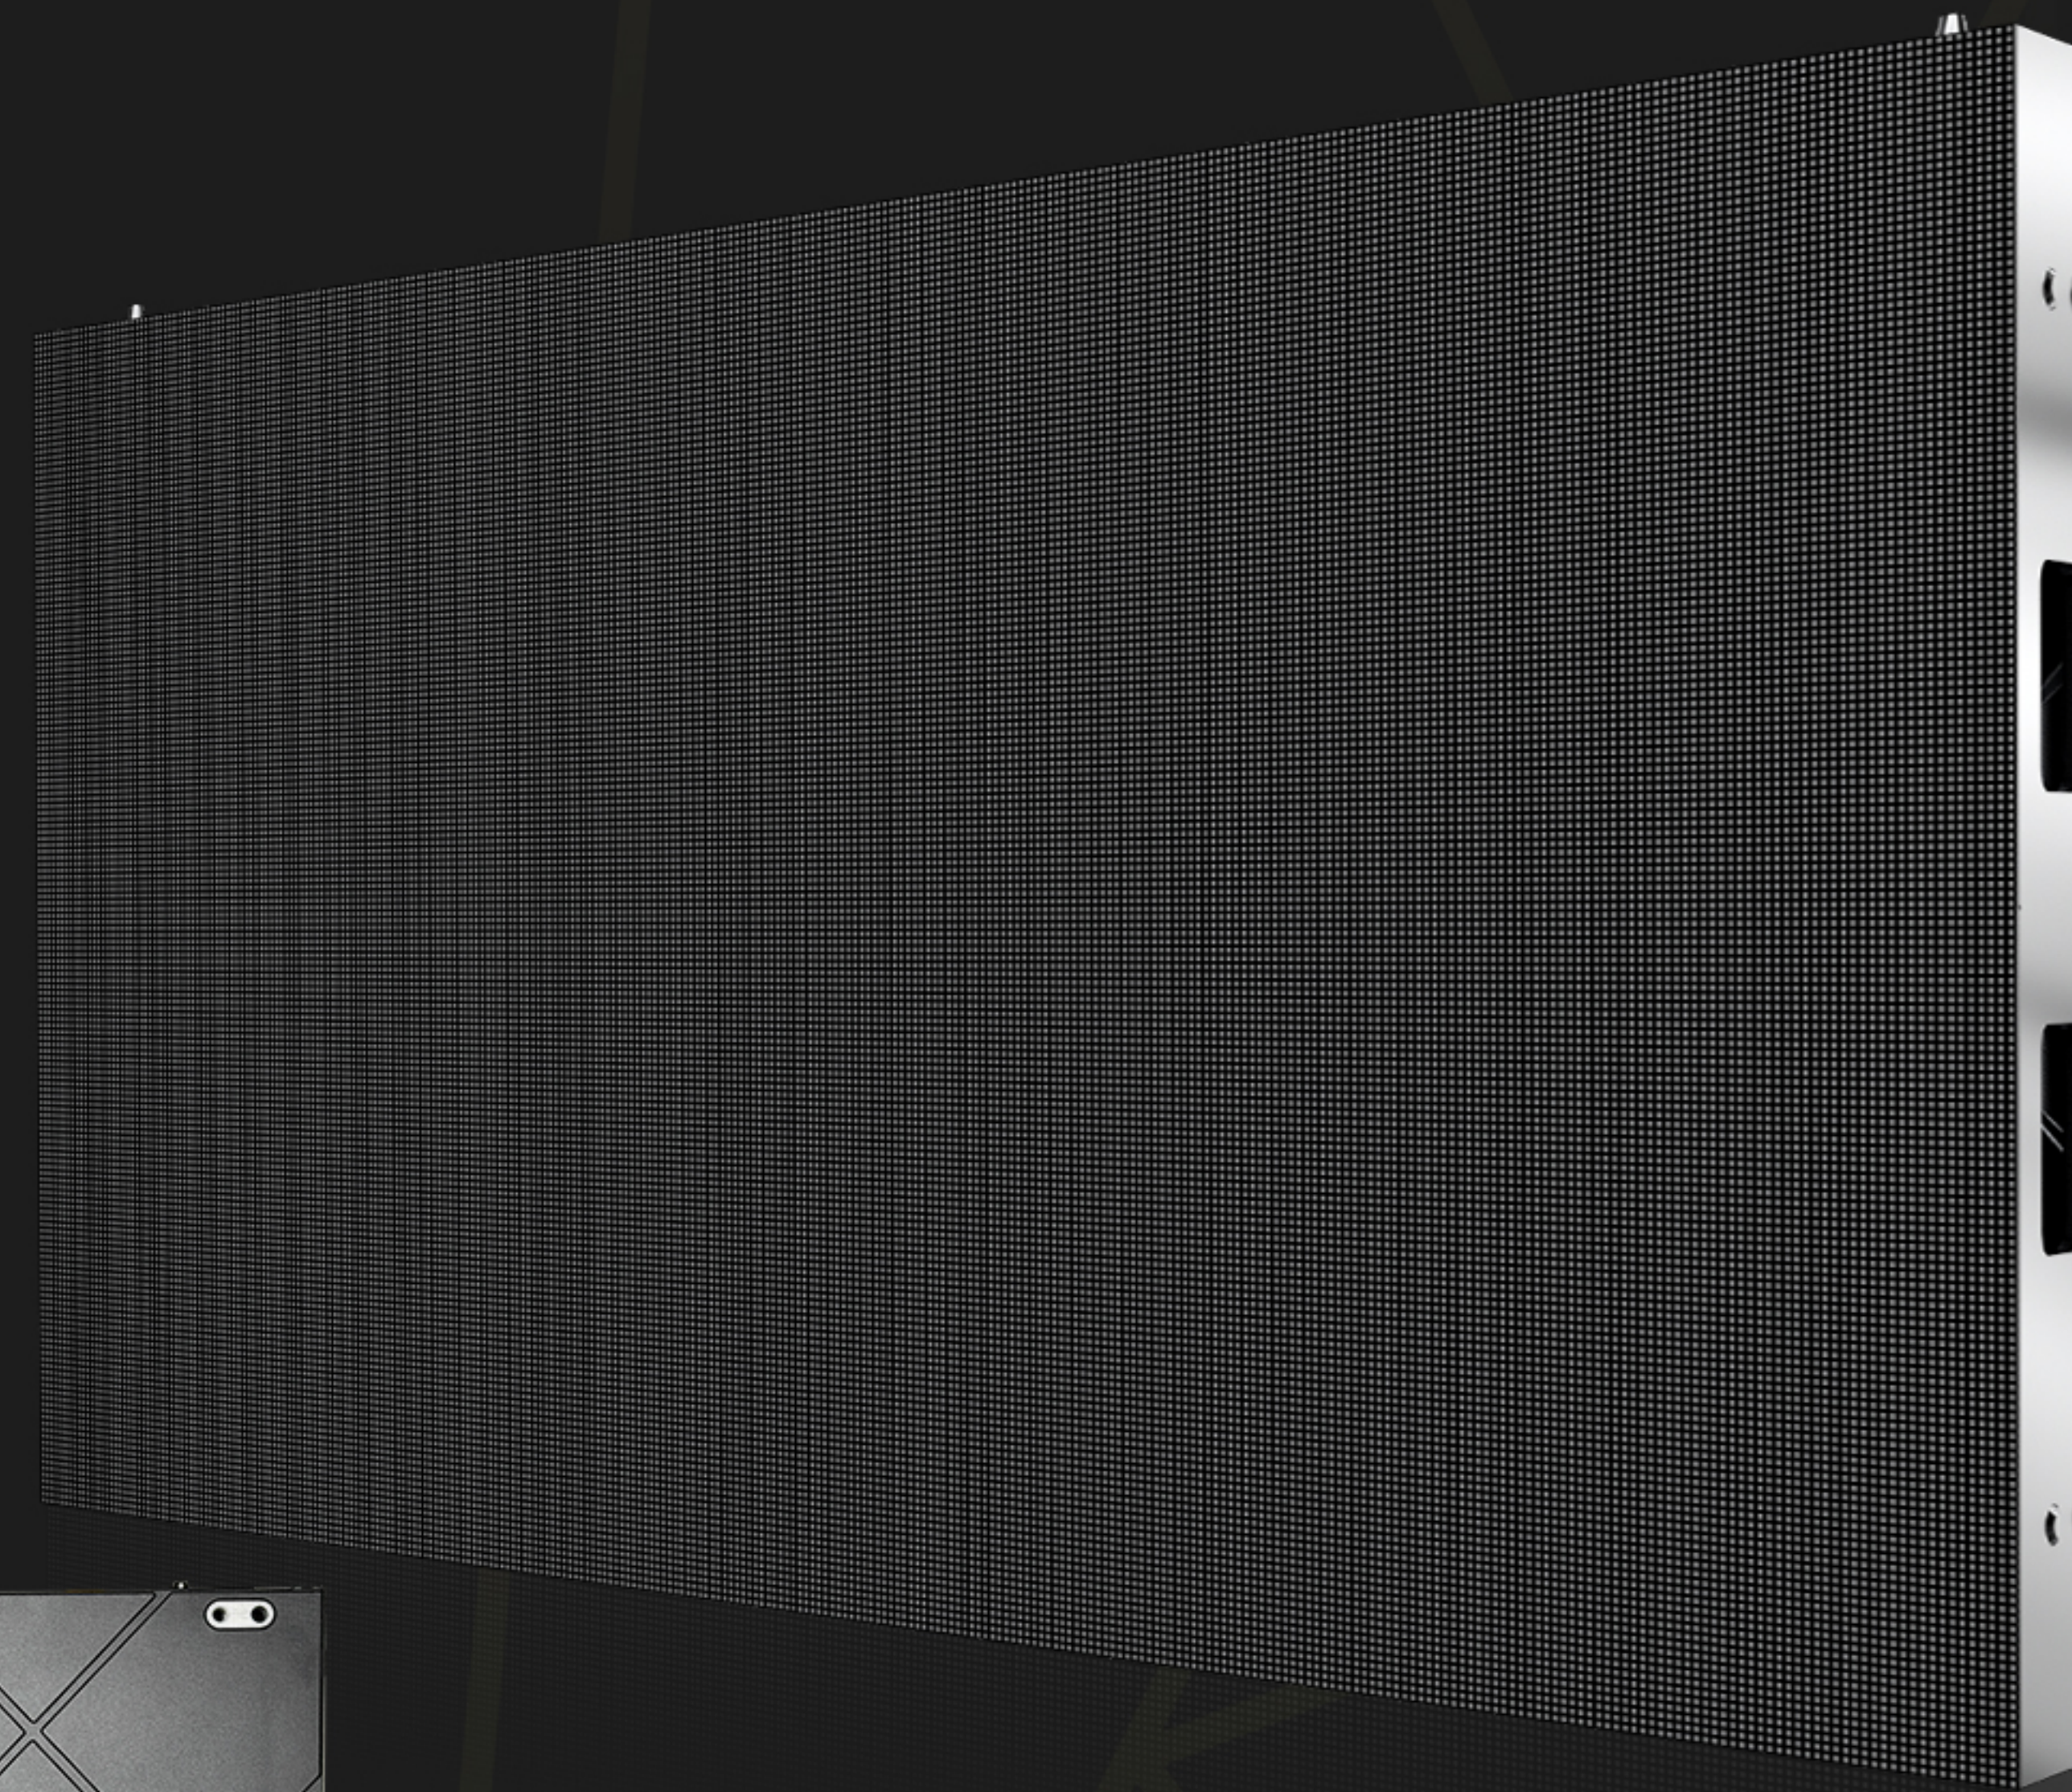


Weight 4.3kg



L*H: 300*168.75(mm)

Module

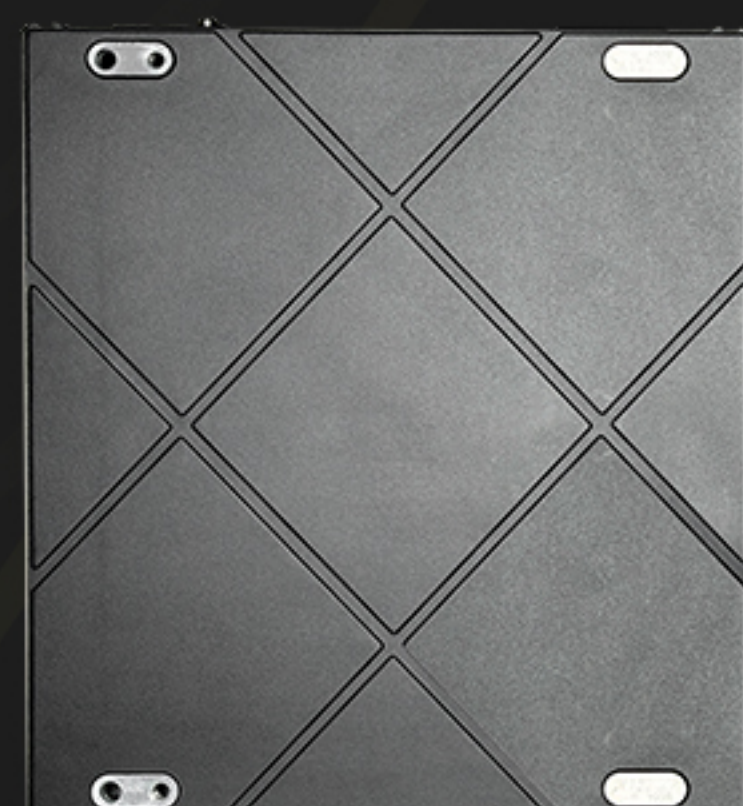

L*H: 300*337.5(mm)



L*H: 600*337.5(mm)

Cabinet

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Perfect Ratio 16:9




Doudle Back



EnBon

High Refresh Rate

High Grayscale

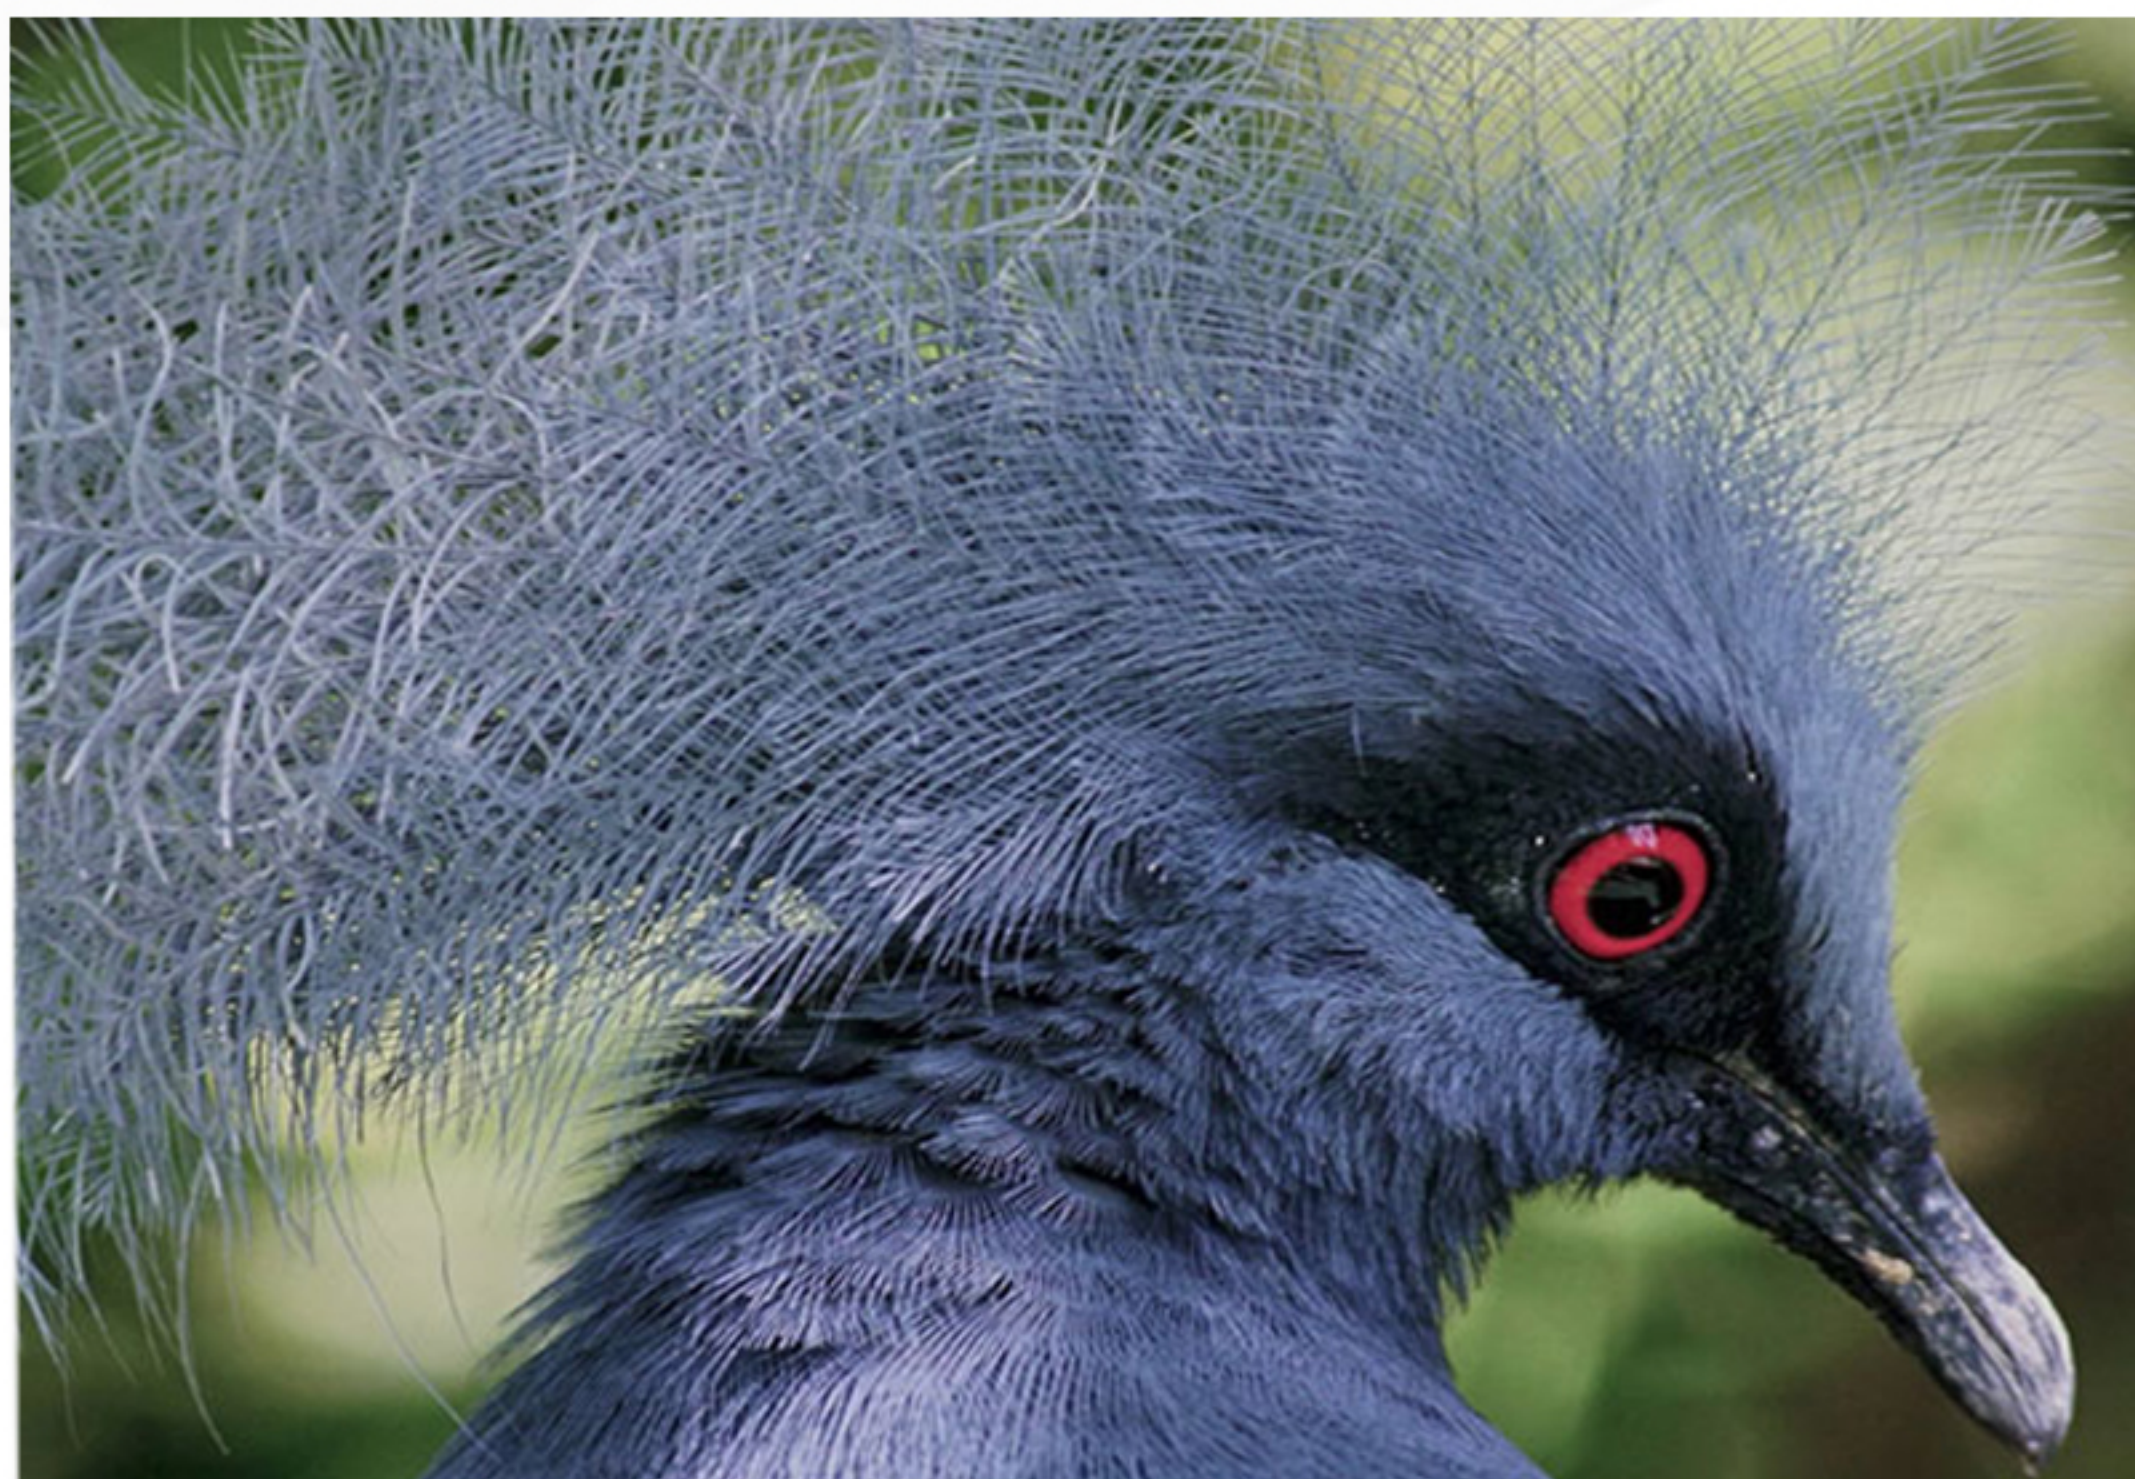

Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale

ENBON GROUP
Spirit & Success, **Together**




Enbon



Enbon **Led** Display



Product Details

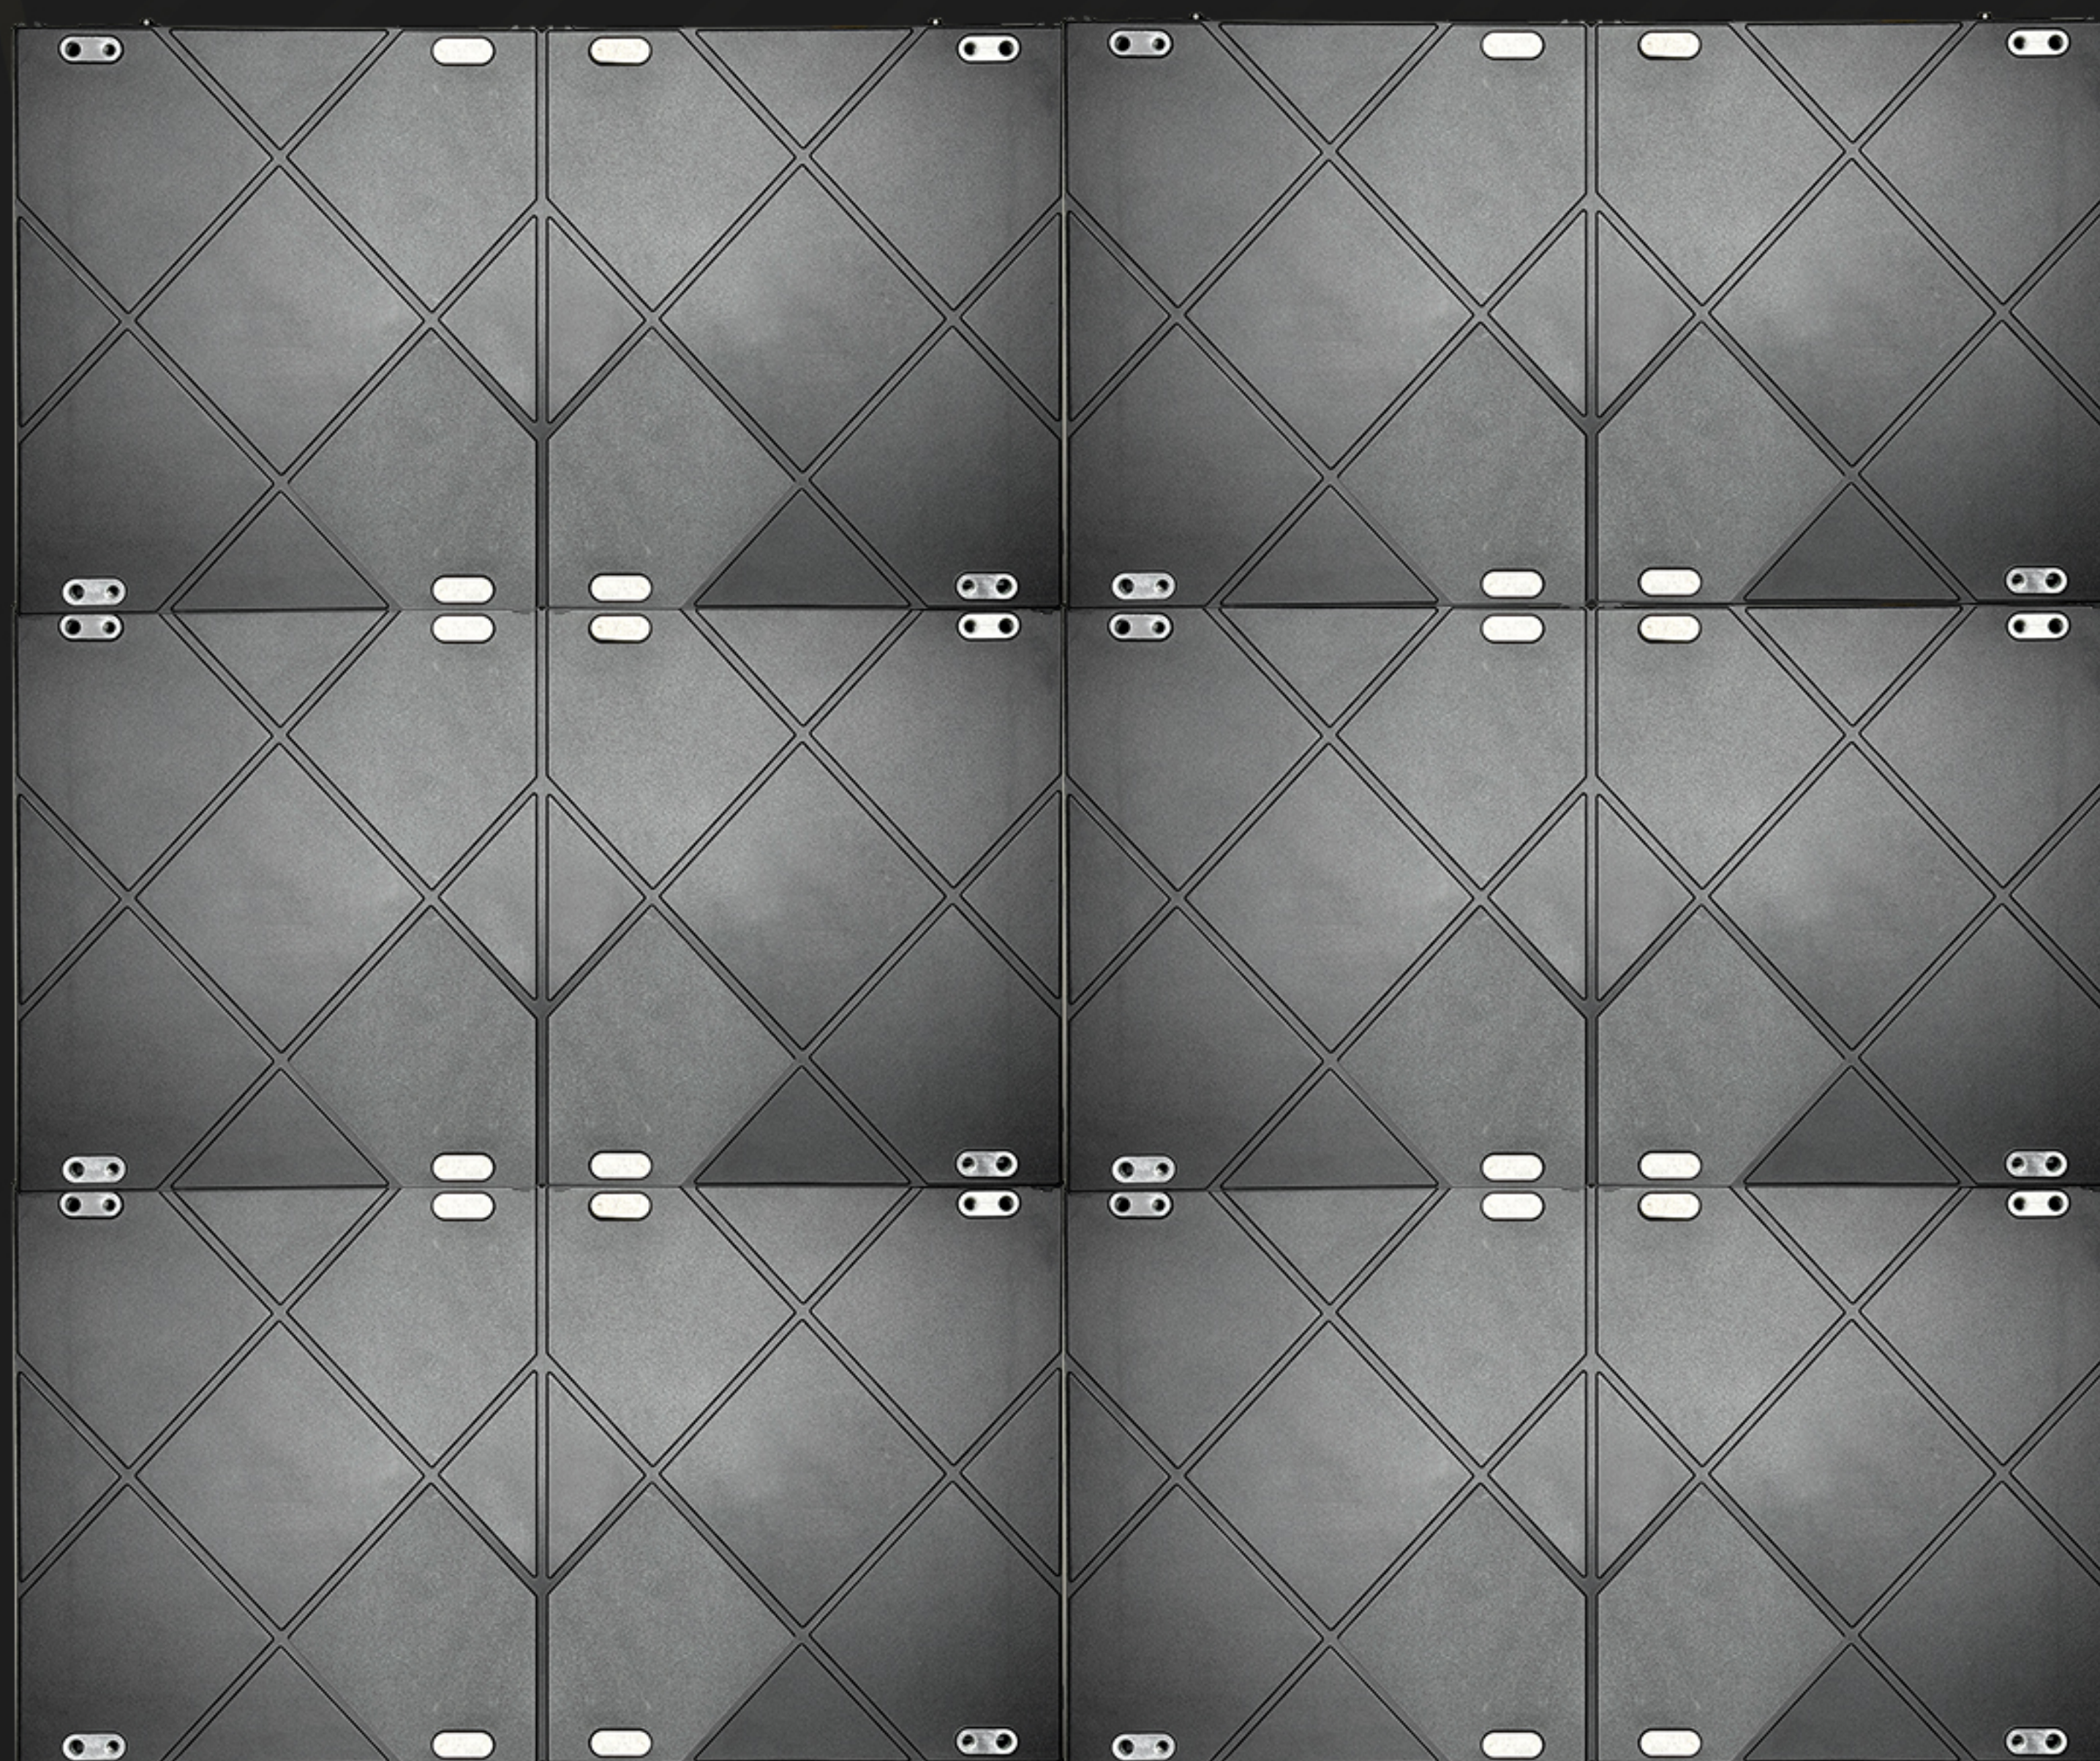

Can Do Seamless Splicing



Handles



Corner Cover



Power Box



Fast Lock
Between Left and
Right Cabinets




Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation

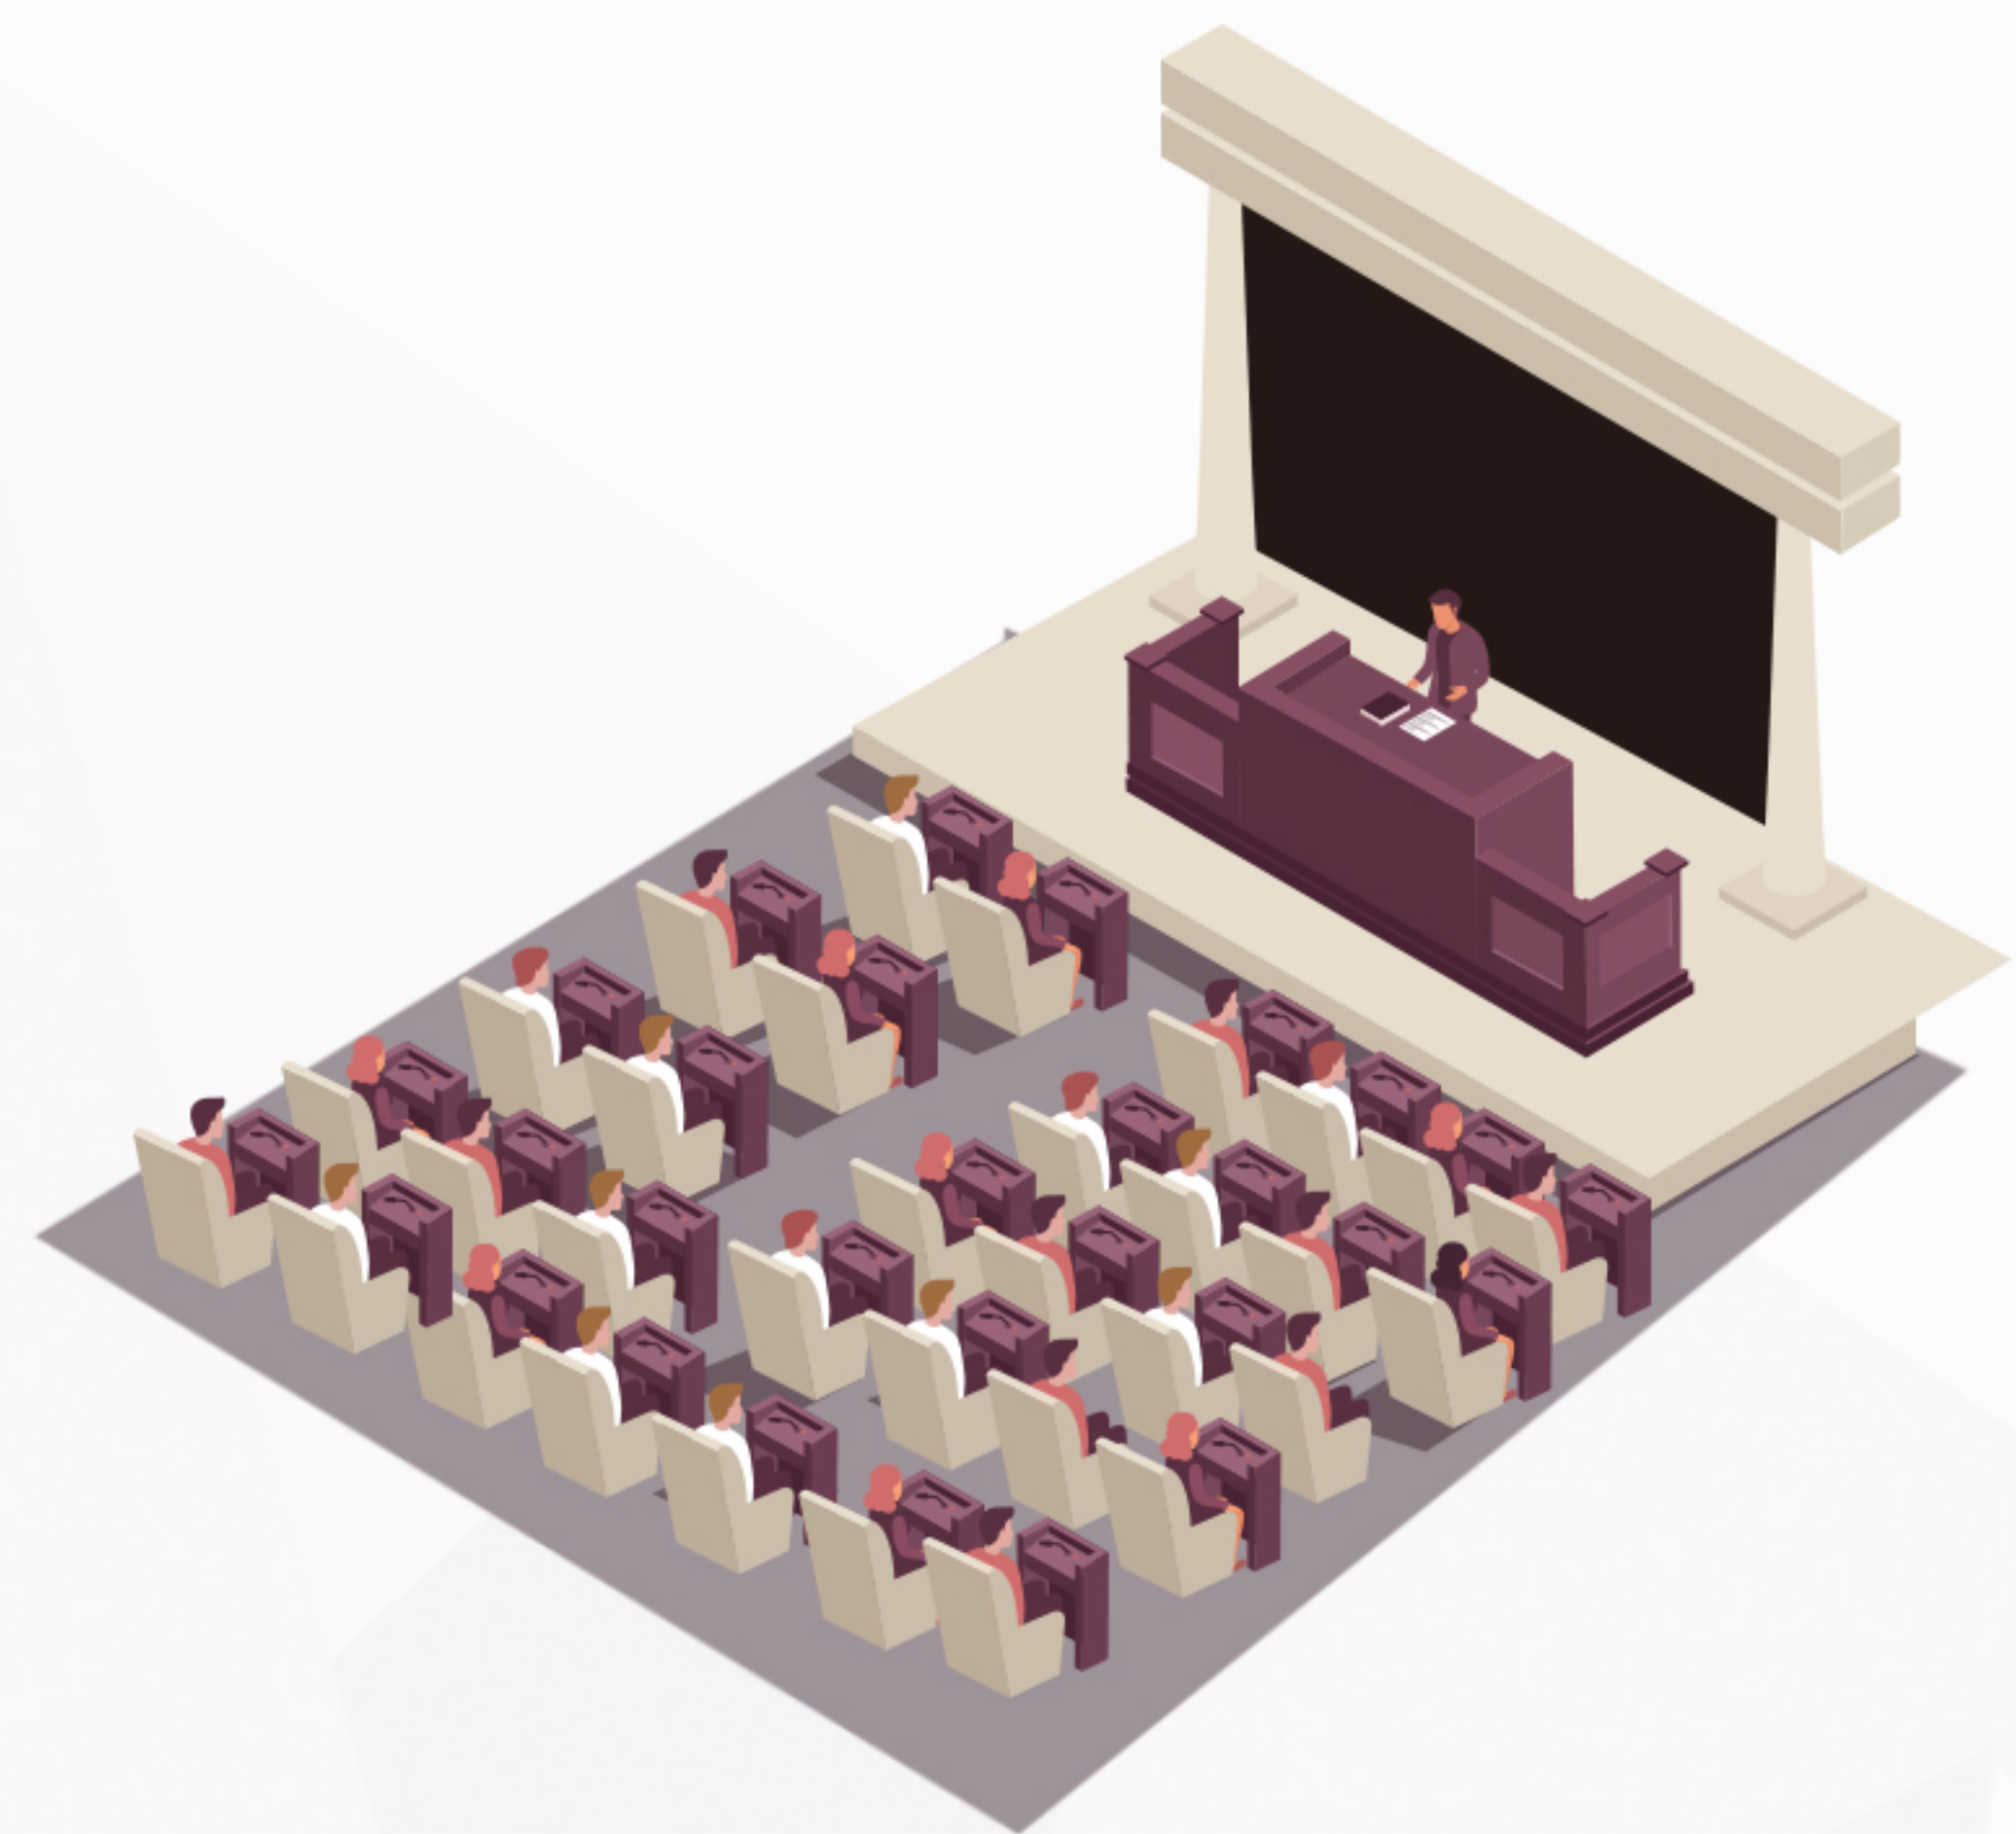

Vertical Installation



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.25	1.56	1.875
LED Lamp	SMD1010	SMD1212	SMD1515
Density (dots/m2)	640000	409600	284444
Brightness	≤800 nits	≤800 nits	≤800 nits
IP Rating	IP45	IP45	IP45
Cabinet Materiel	Die-casting Aluminum		
Scan	60 scan	64 scan	45 scan
Module Weight	0.3 kg	0.3 kg	0.3 kg
Cabinet Weight	4.3kg	4.3kg	4.3kg
Module Size (mm)	300*168.75	300*168.75	300*168.75
Cabinet Size (mm)	600*337.5*32 / 300*337.5*32		
Module Pixel	240*135 dots	192*108 dots	160*90 dots
Cabinet Pixel	480*270 dots	384*216 dots	320*180 dots
Max Power	600 w/sqm	600 w/sqm	600 w/sqm
Average Power	300 w/sqm	300 w/sqm	300 w/sqm
Viewing Angle	H160 (+80/-80) deg V160 (+80/-80) deg		
Control Way	Synchronous / Asynchronous		
Gray Scale	16 bit		
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI		
Work Humidity	10% ~90%		
Work Temperature	-20 ~ + 65°C		

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display