




FS Model

Small Pitch Cabinet Full Front Service

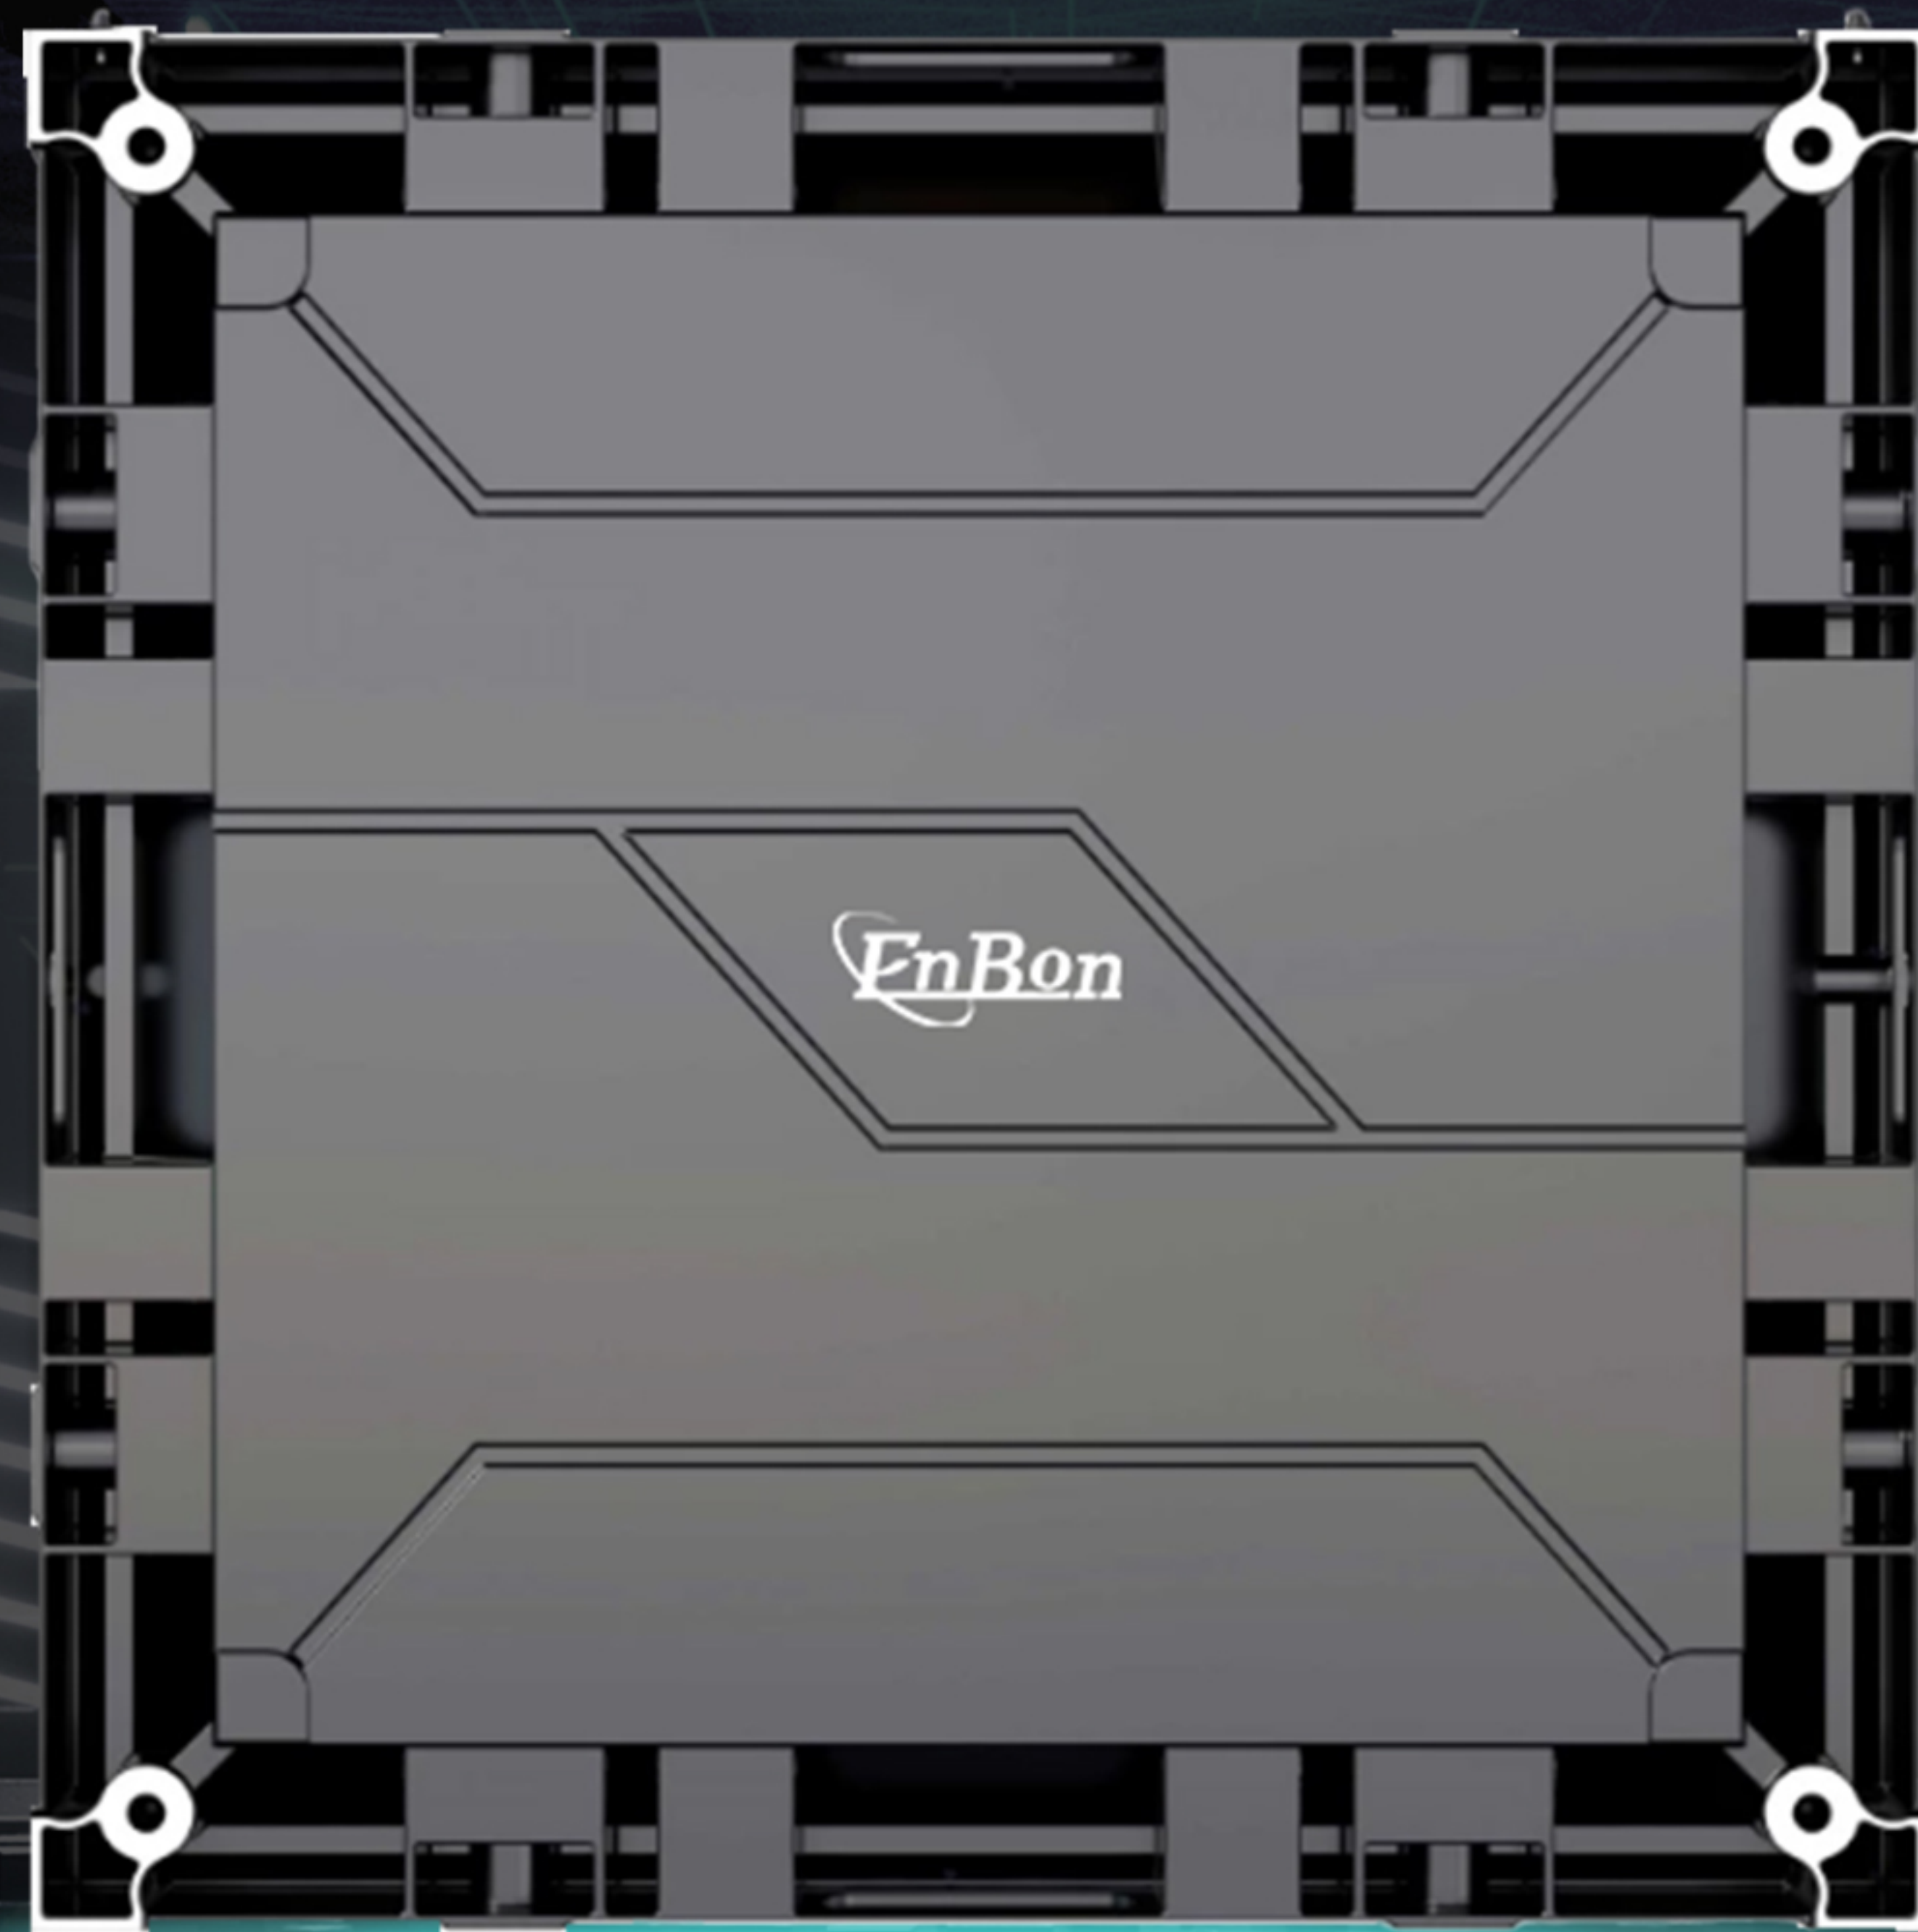

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display




Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move




L*H: 240*240(mm)

Module

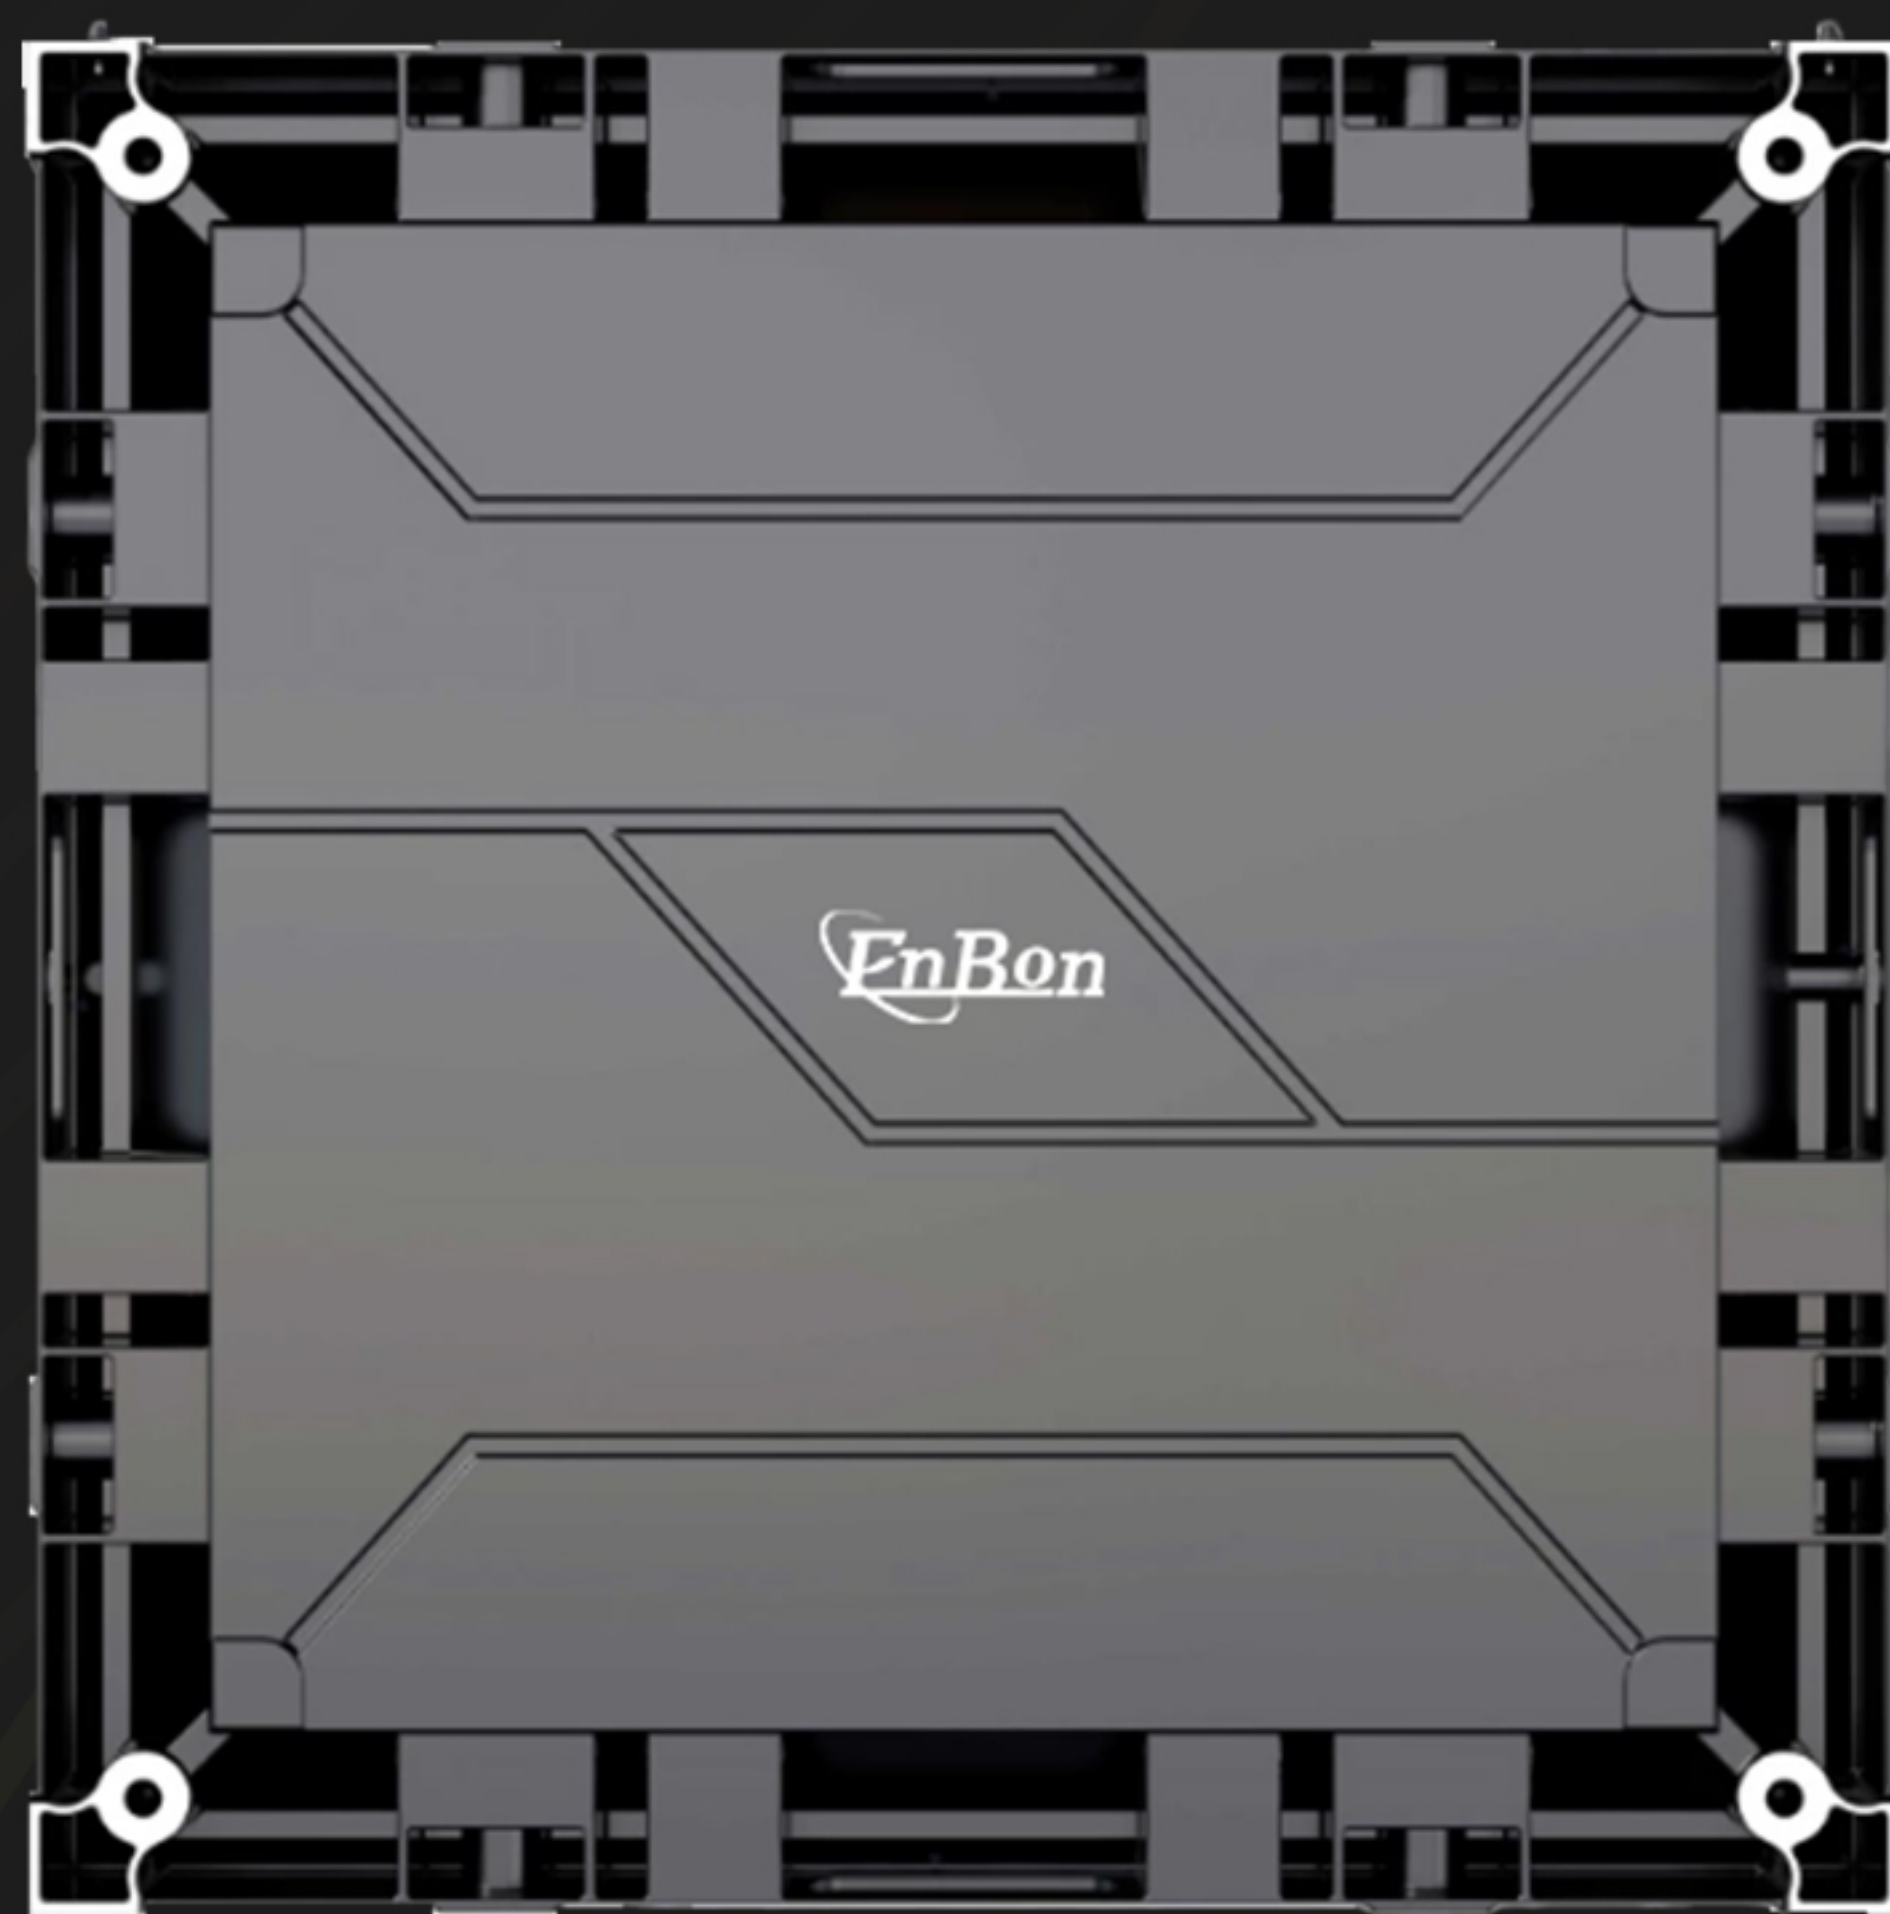

L*H: 480*480(mm)

Cabinet

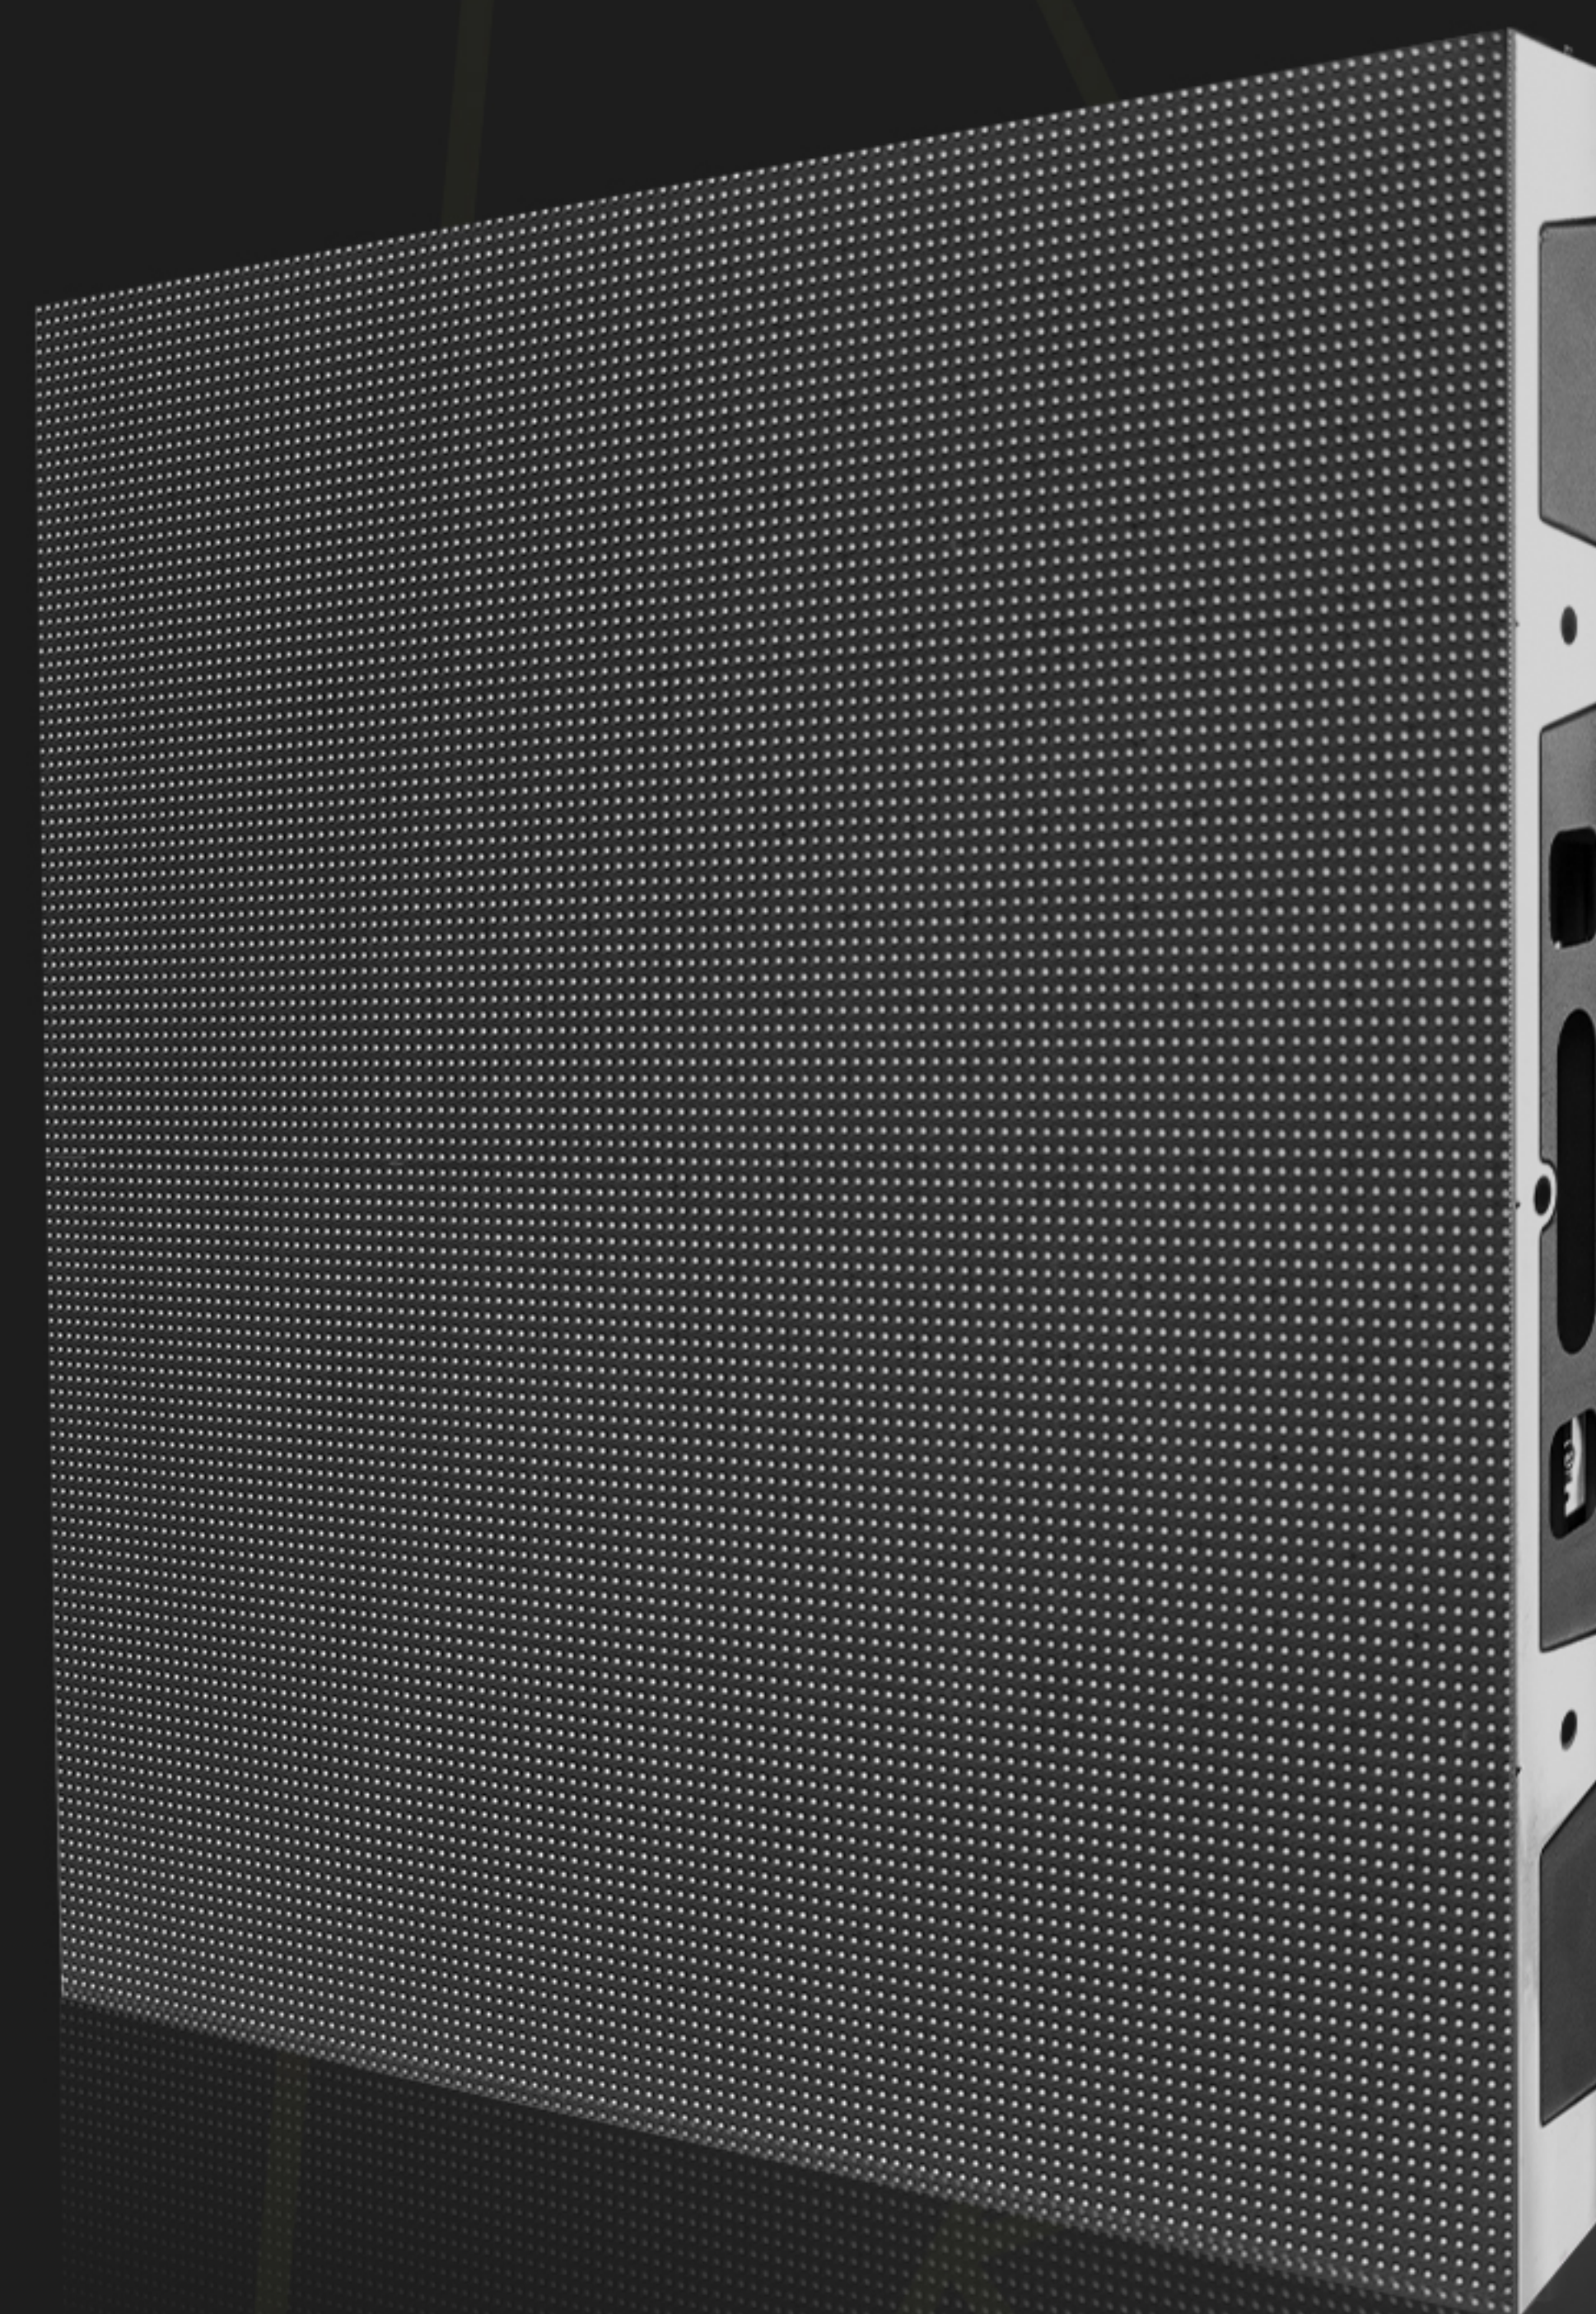

Weight 5.5kg

ENBON GROUP
Spirit & Success, **T**ogether



Enbon



Enbon **L**ed Display



Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display

EnBon

High Refresh Rate

High Grayscale

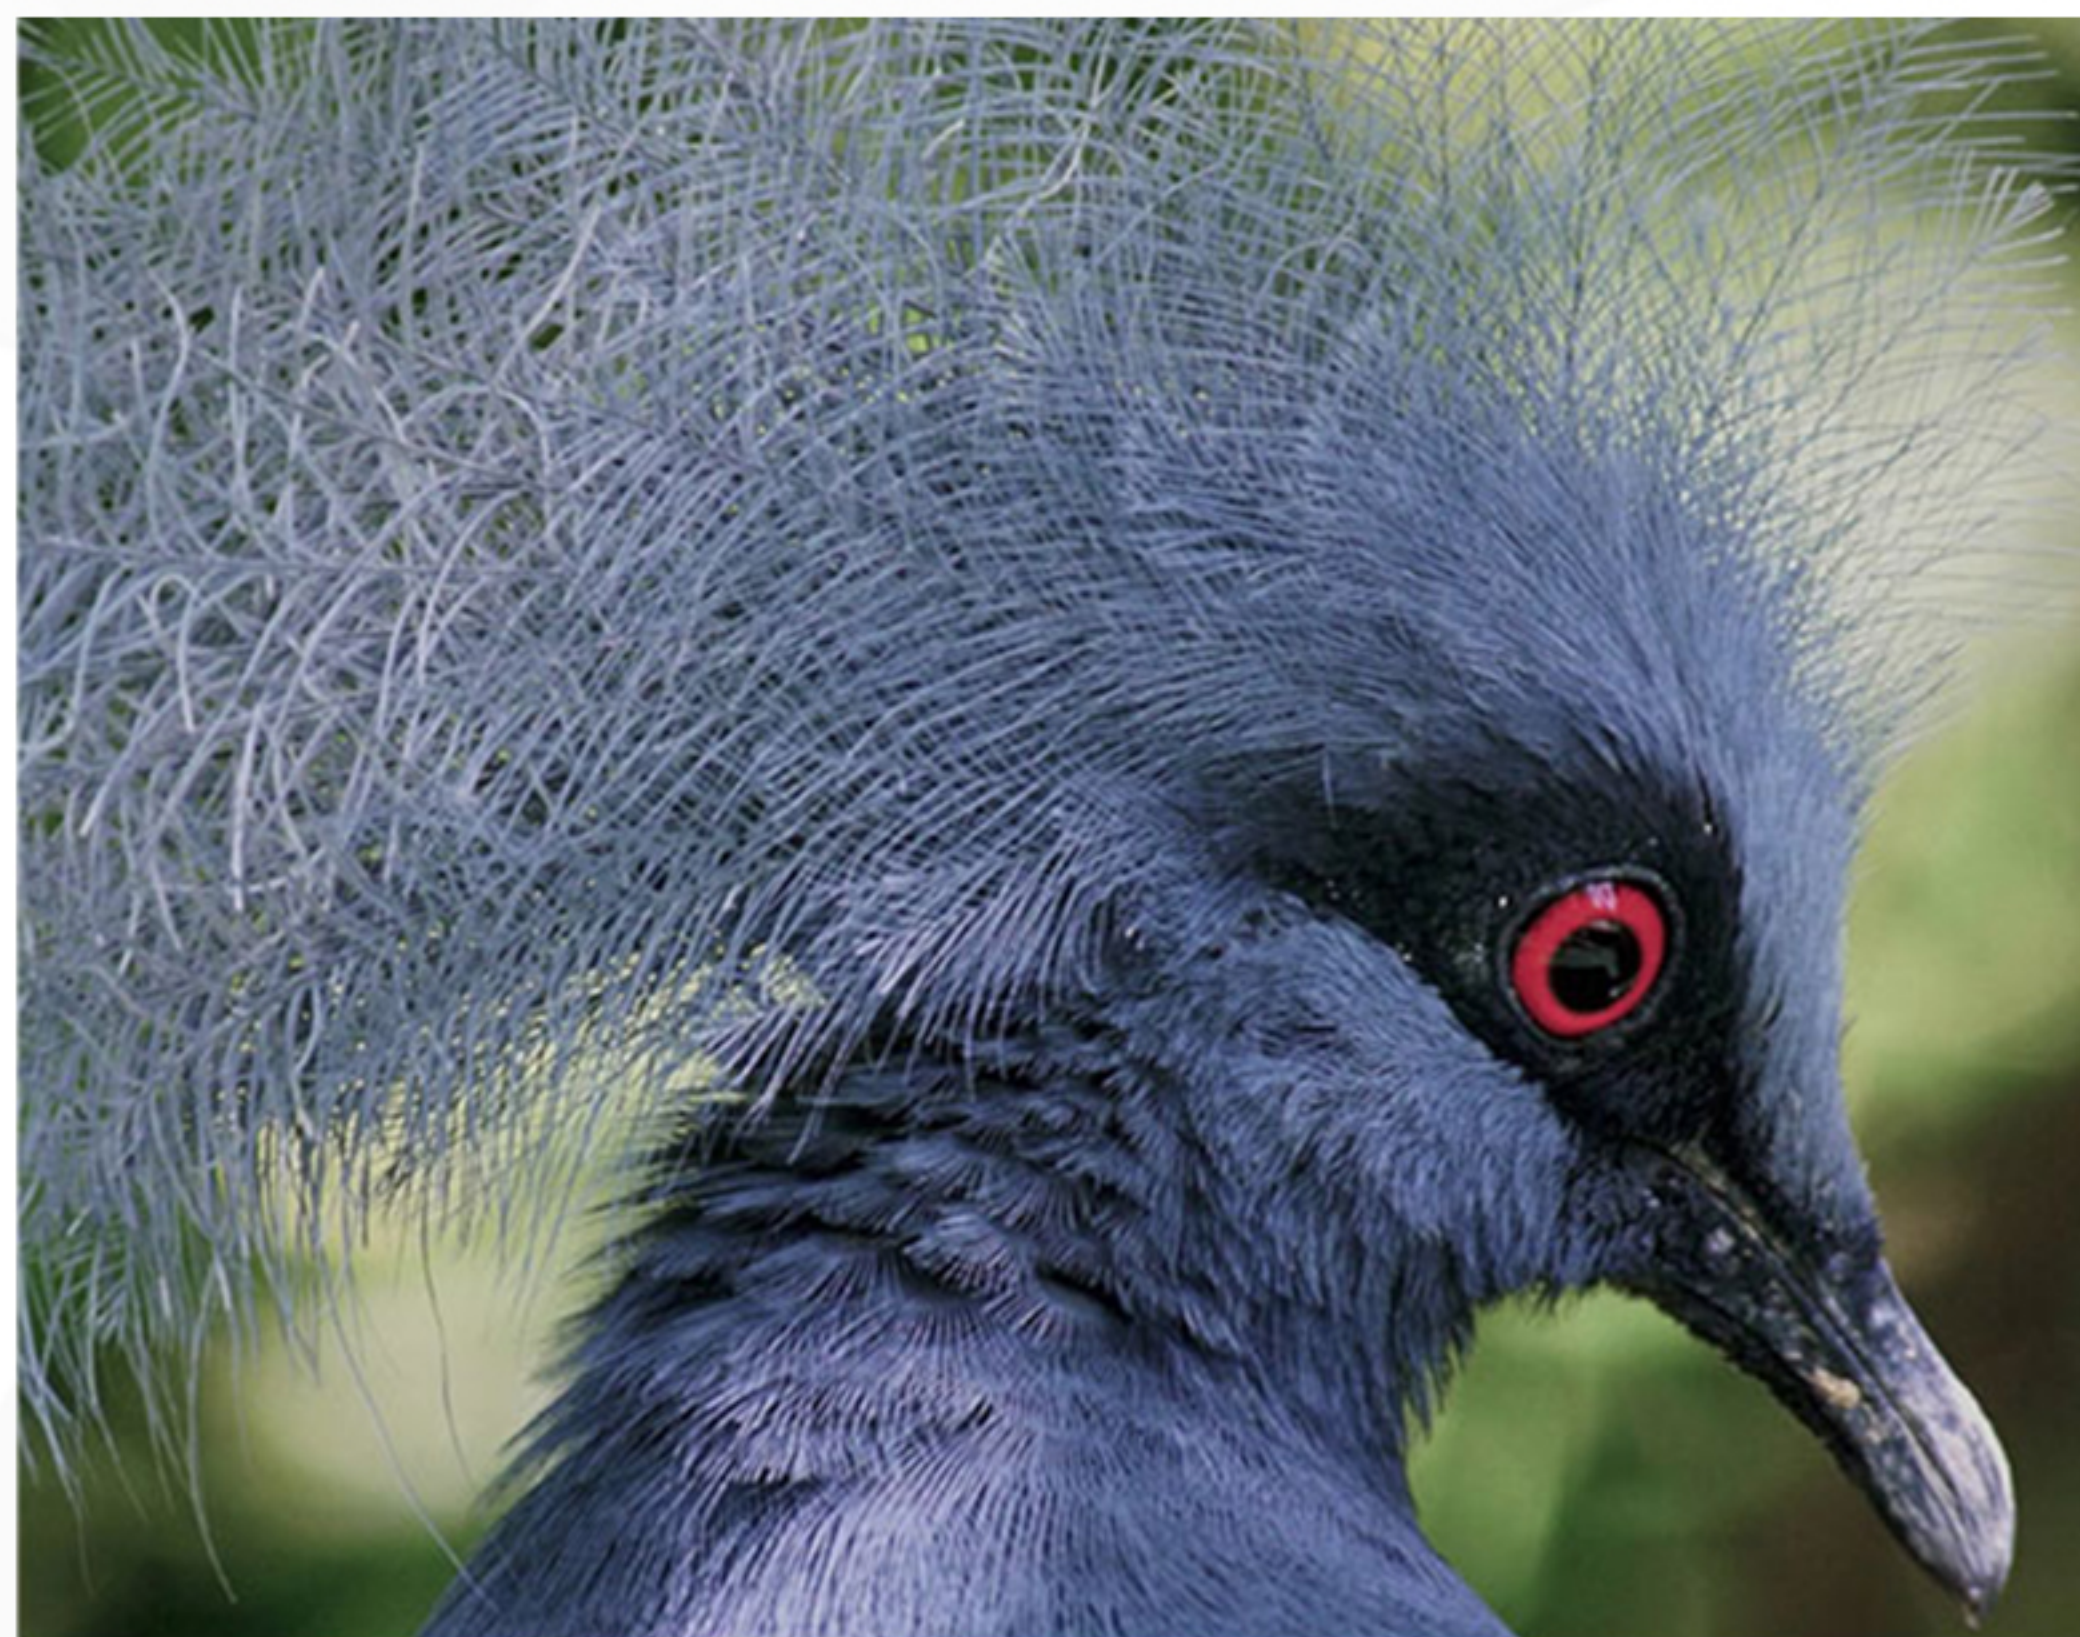

Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale

ENBON GROUP
Spirit & Success, **Together**




Enbon



Enbon **Led** Display




Product Details

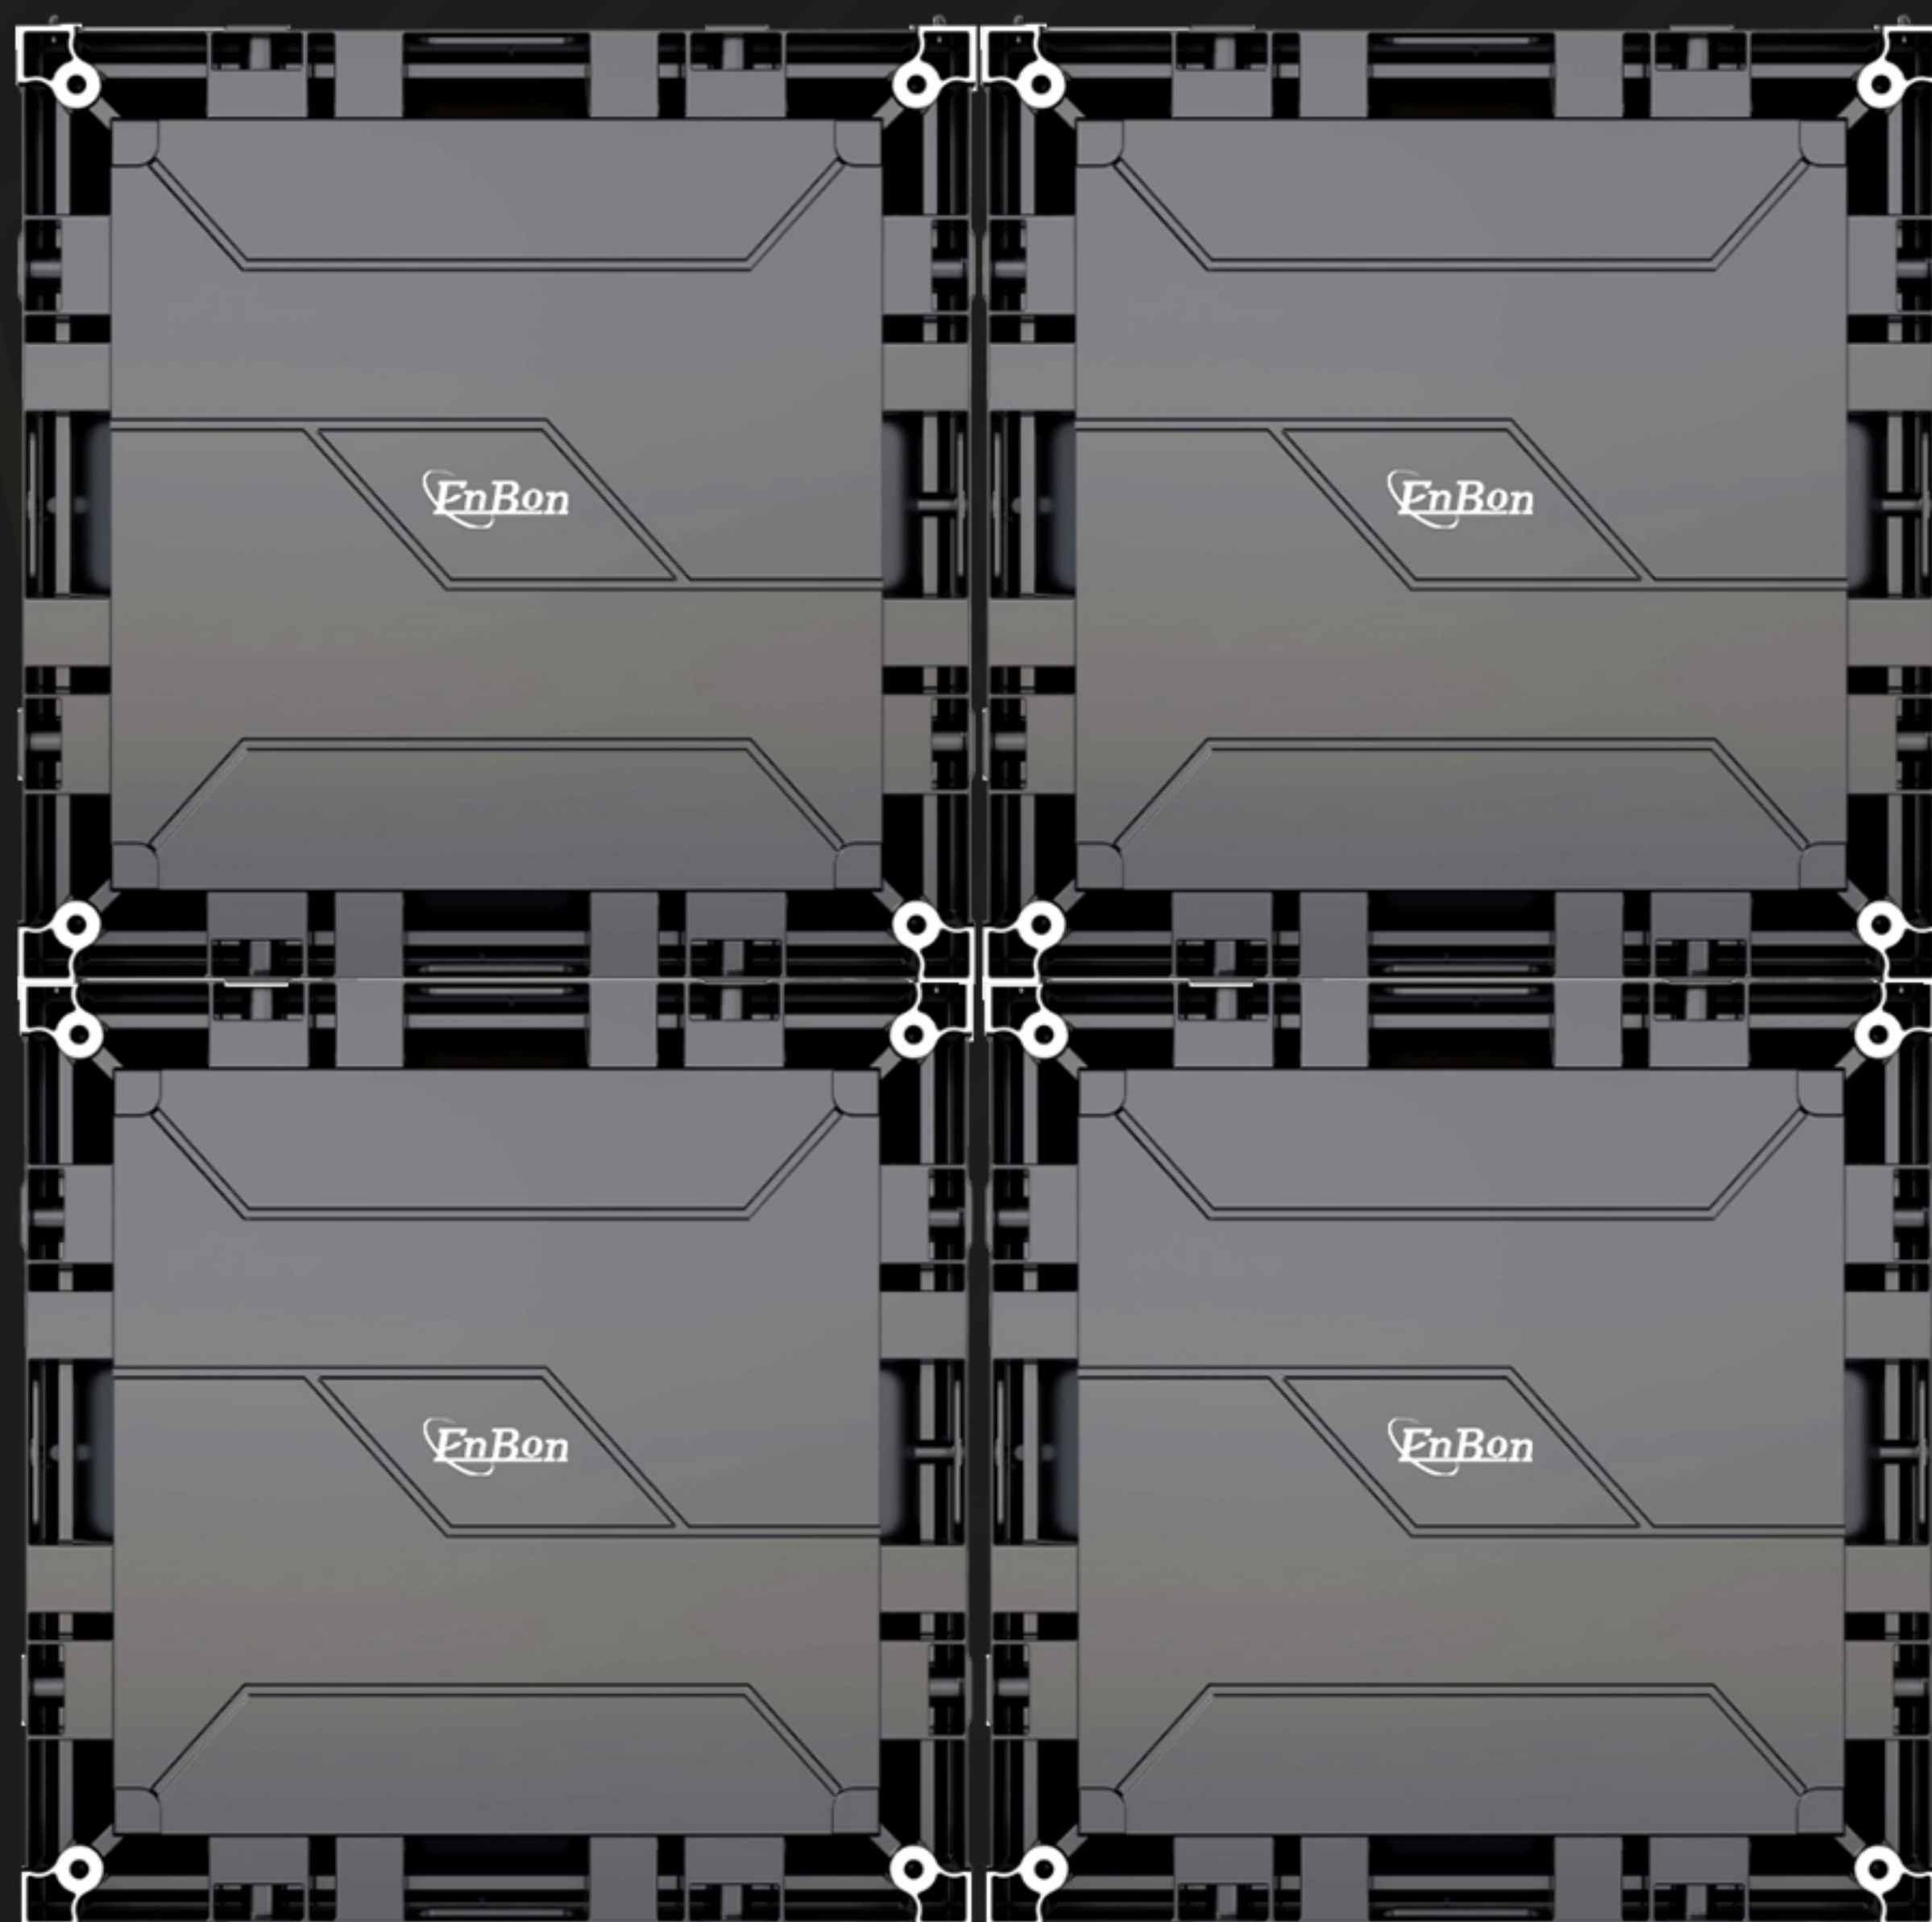

Can Do Seamless Splicing



Handles

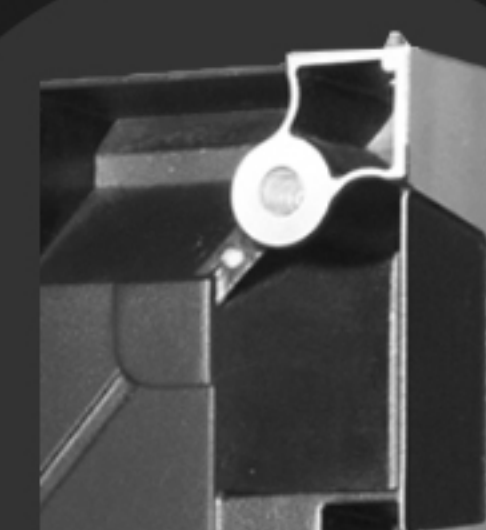

Corner Cover



Power Box



Fast Lock
Between Left and
Right Cabinets

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display




Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation

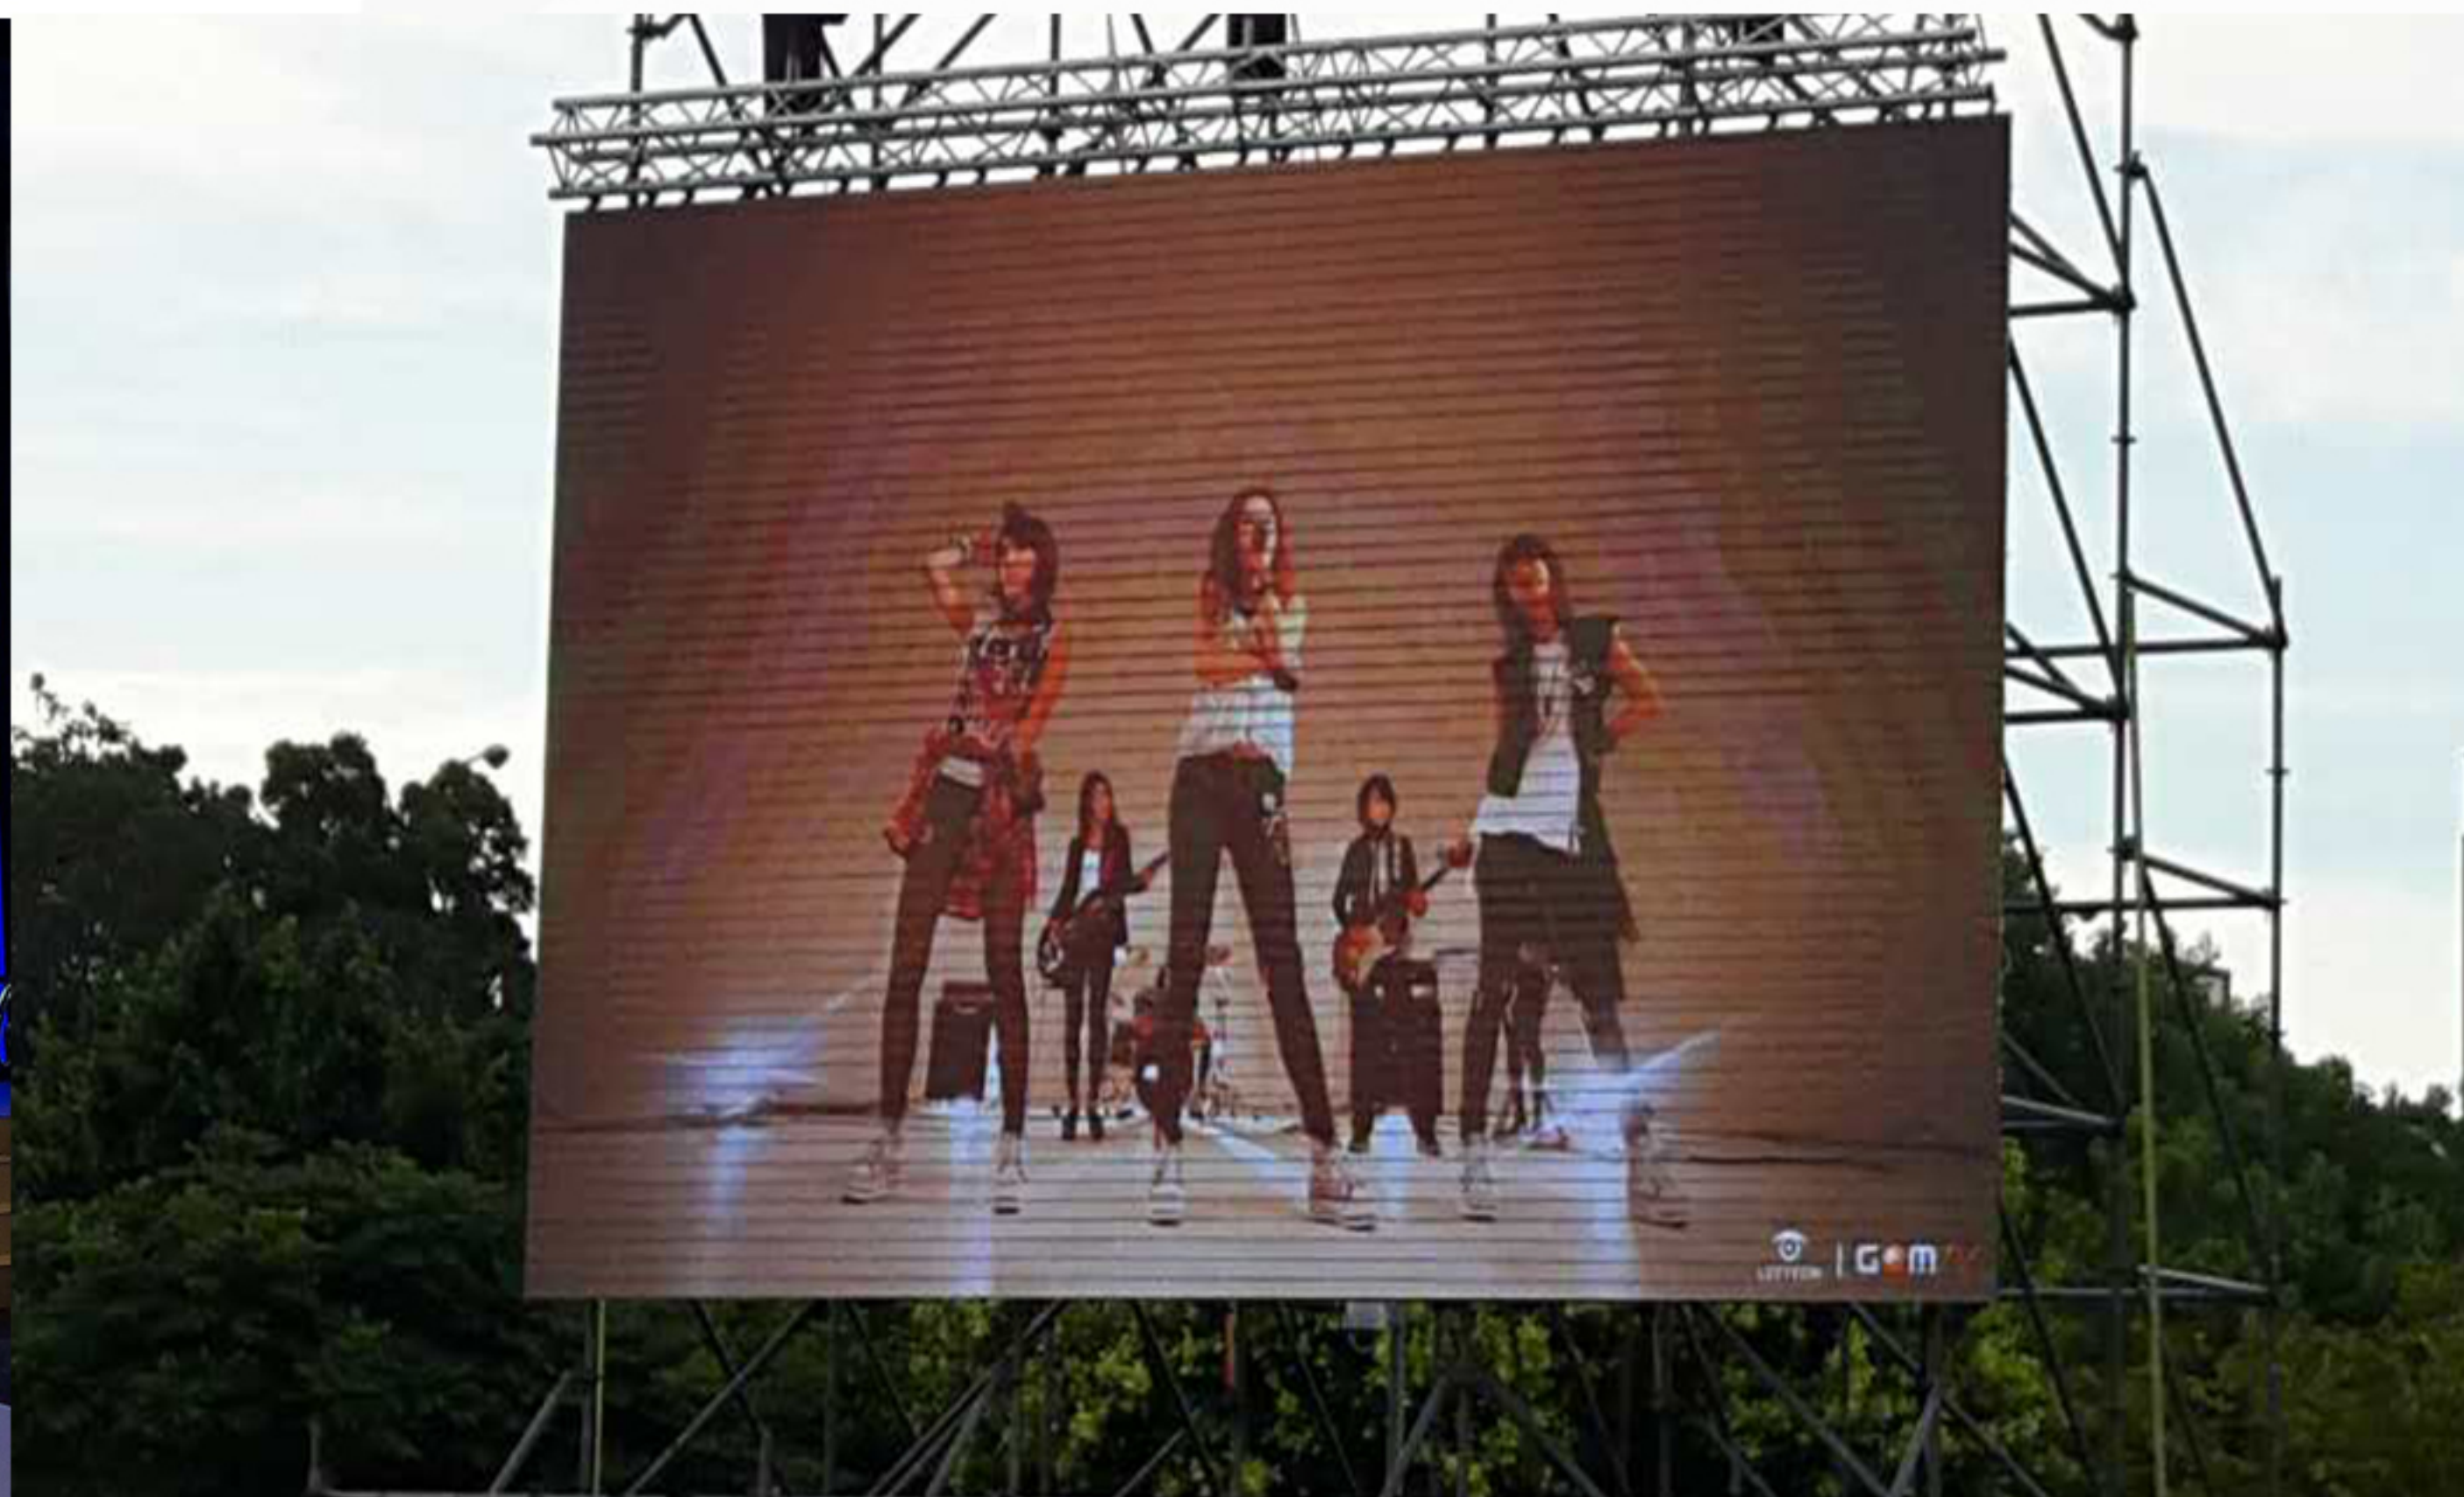

Vertical Installation



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.579	1.875	2.5	3
LED Lamp	SMD1212	SMD1515	SMD2020	SMD2020
Density (dots/m2)	401111	284444	160000	111111
Brightness	600-700 nits	600-700 nits	600-700 nits	600-700 nits
IP Rating	Front IP45 / Rear IP30			
Cabinet Materiel	Die-casting Aluminum			
Scan	38 scan	64 scan	32 scan	40 scan
Module weight	0.3 kg	0.3 kg	0.3 kg	0.3 kg
Cabinet Weight	5.5 kg	5.5 kg	5.5 kg	5.5 kg
Module Size (mm)	240*120	240*240	240*240	240*240
Cabinet Size (mm)	480*480*50	480*480*50	480*480*50	480*480*50
Module Pixel	152*76 dots	128*128 dots	96*96 dots	80*80 dots
Cabinet Pixel	304*304 dots	256*256 dots	192*192 dots	160*160 dots
Max Power	600 w/sqm	600 w/sqm	600 w/sqm	600 w/sqm
Average Power	360 w/sqm	360 w/sqm	360 w/sqm	360 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous / Asynchronous			
Gray Scale	16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10% ~ 90%			
Work Temperature	-20 ~ + 65°C			

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display