


EnBon

45° Oblique Angle

R5 Model

Can be connected to right-angle side cabinets

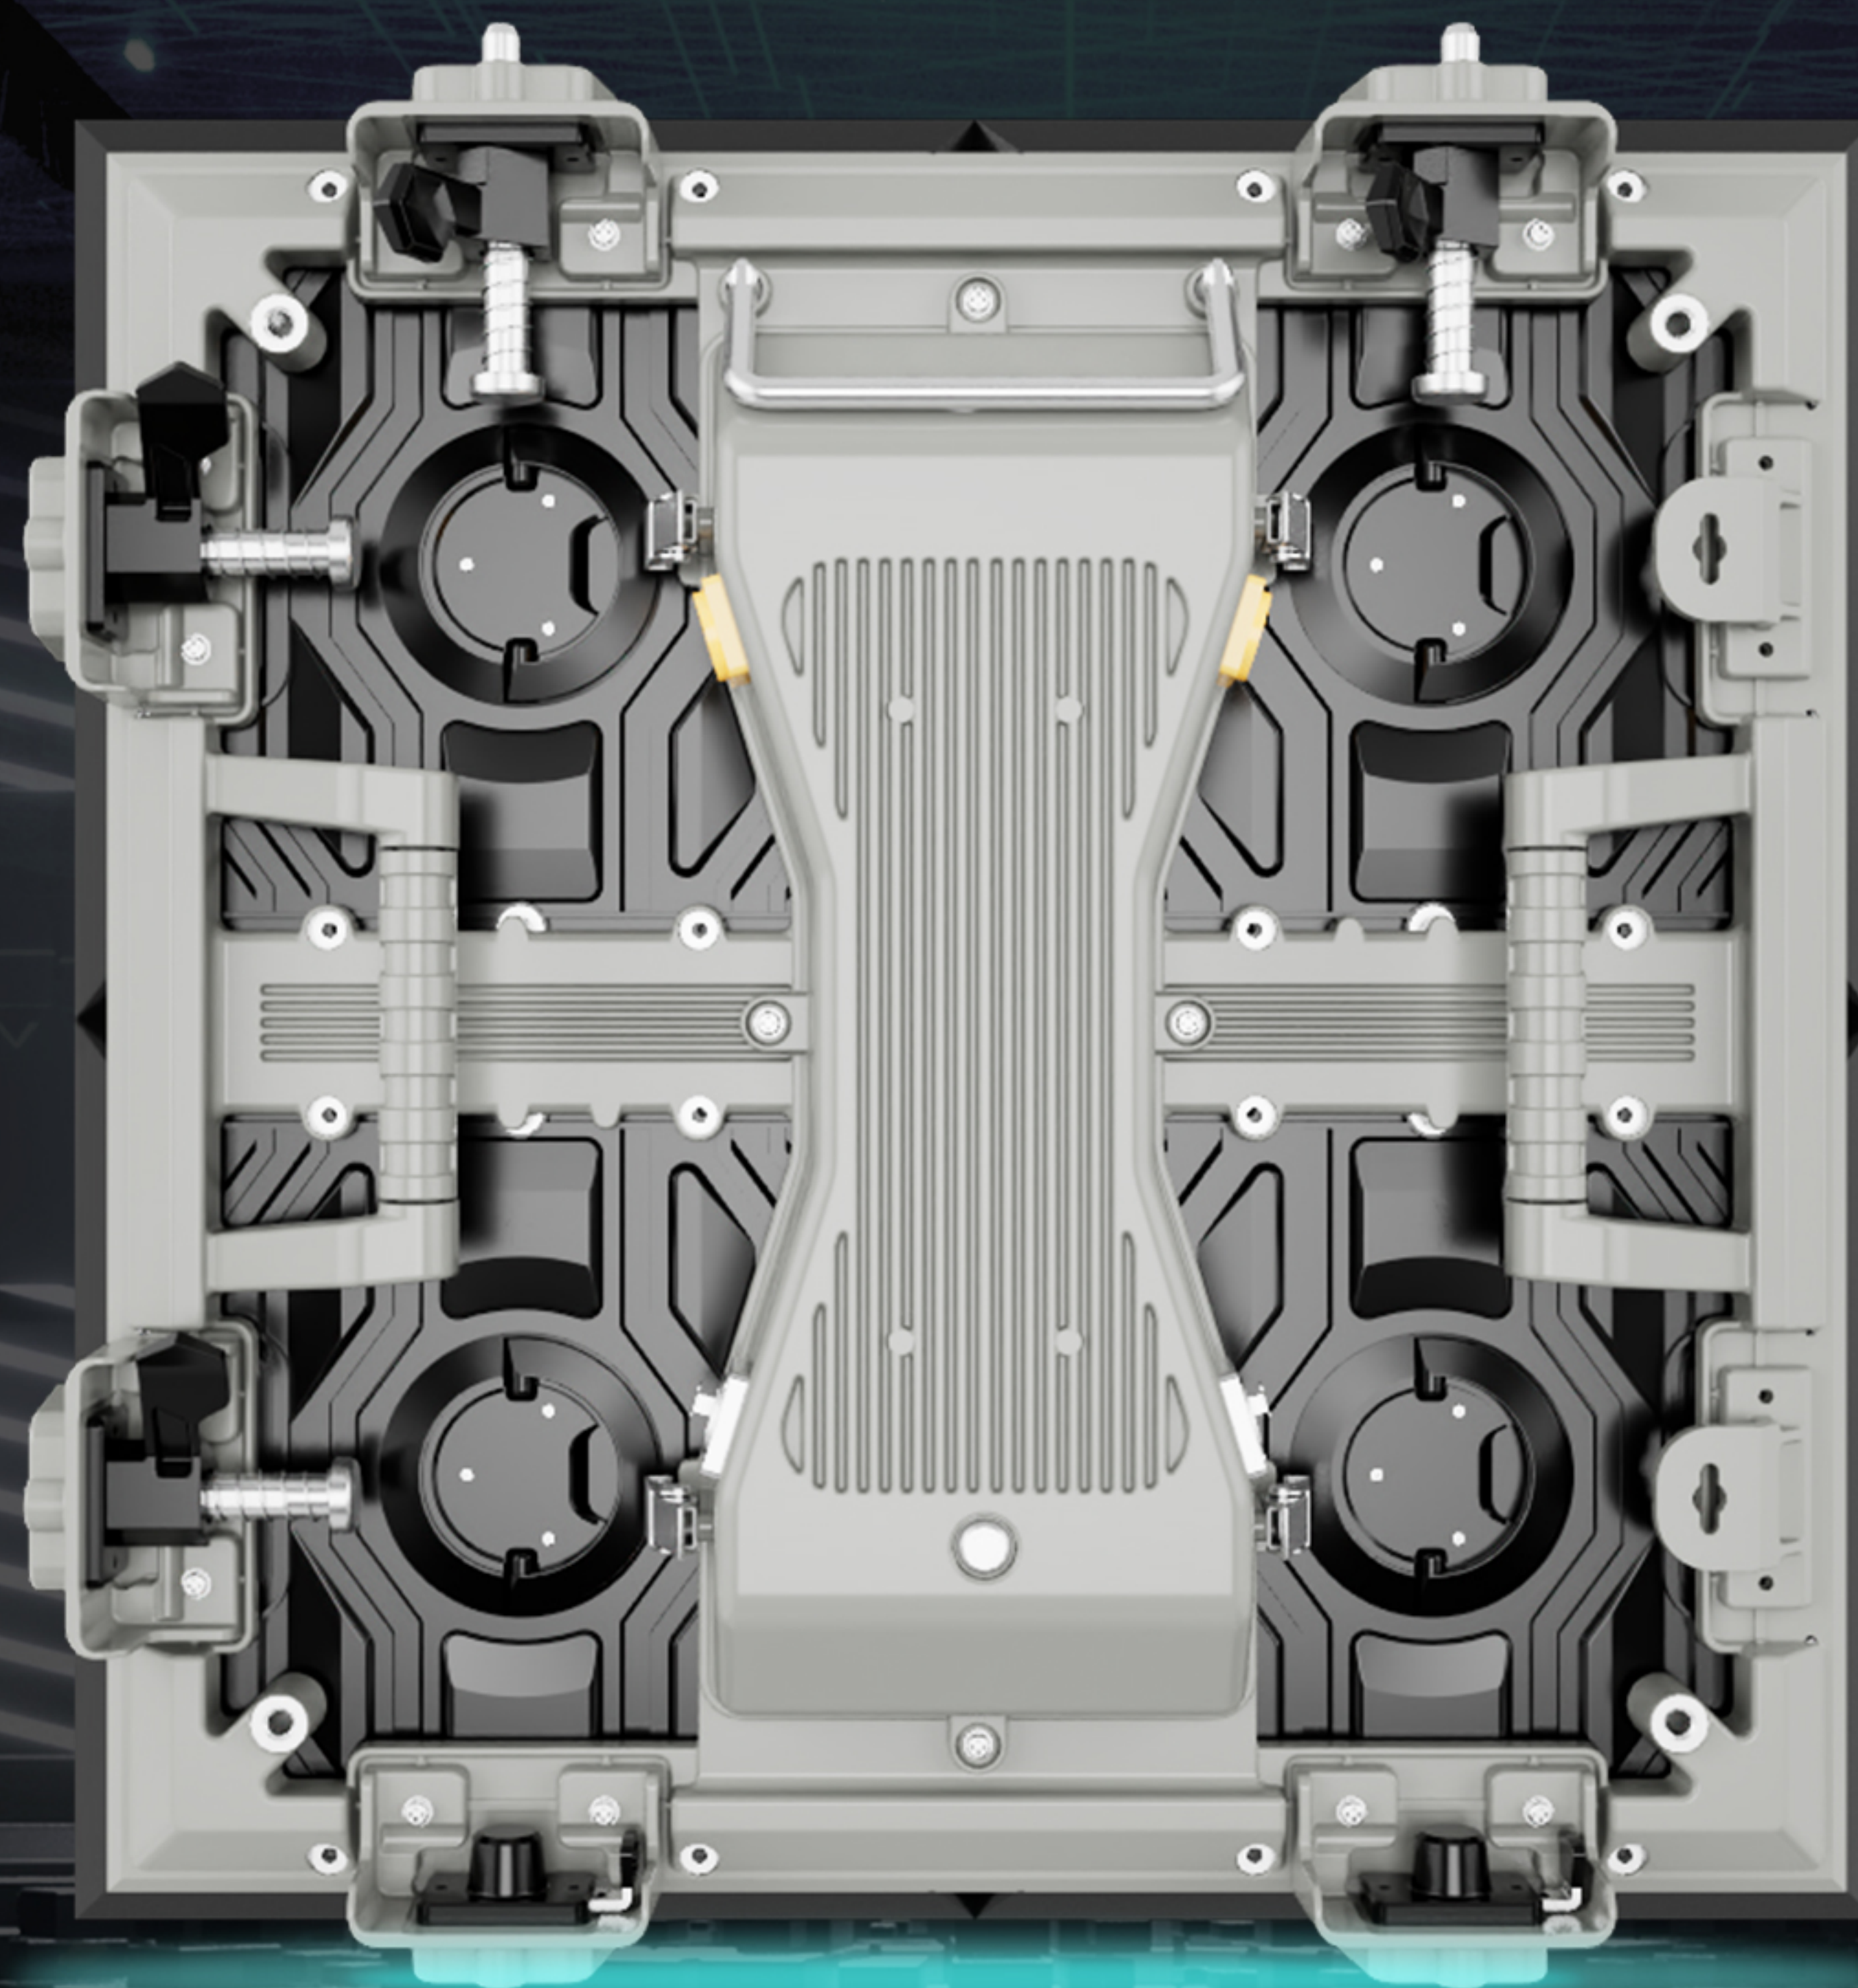

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display




Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move




L*H: 250*250(mm)

Module

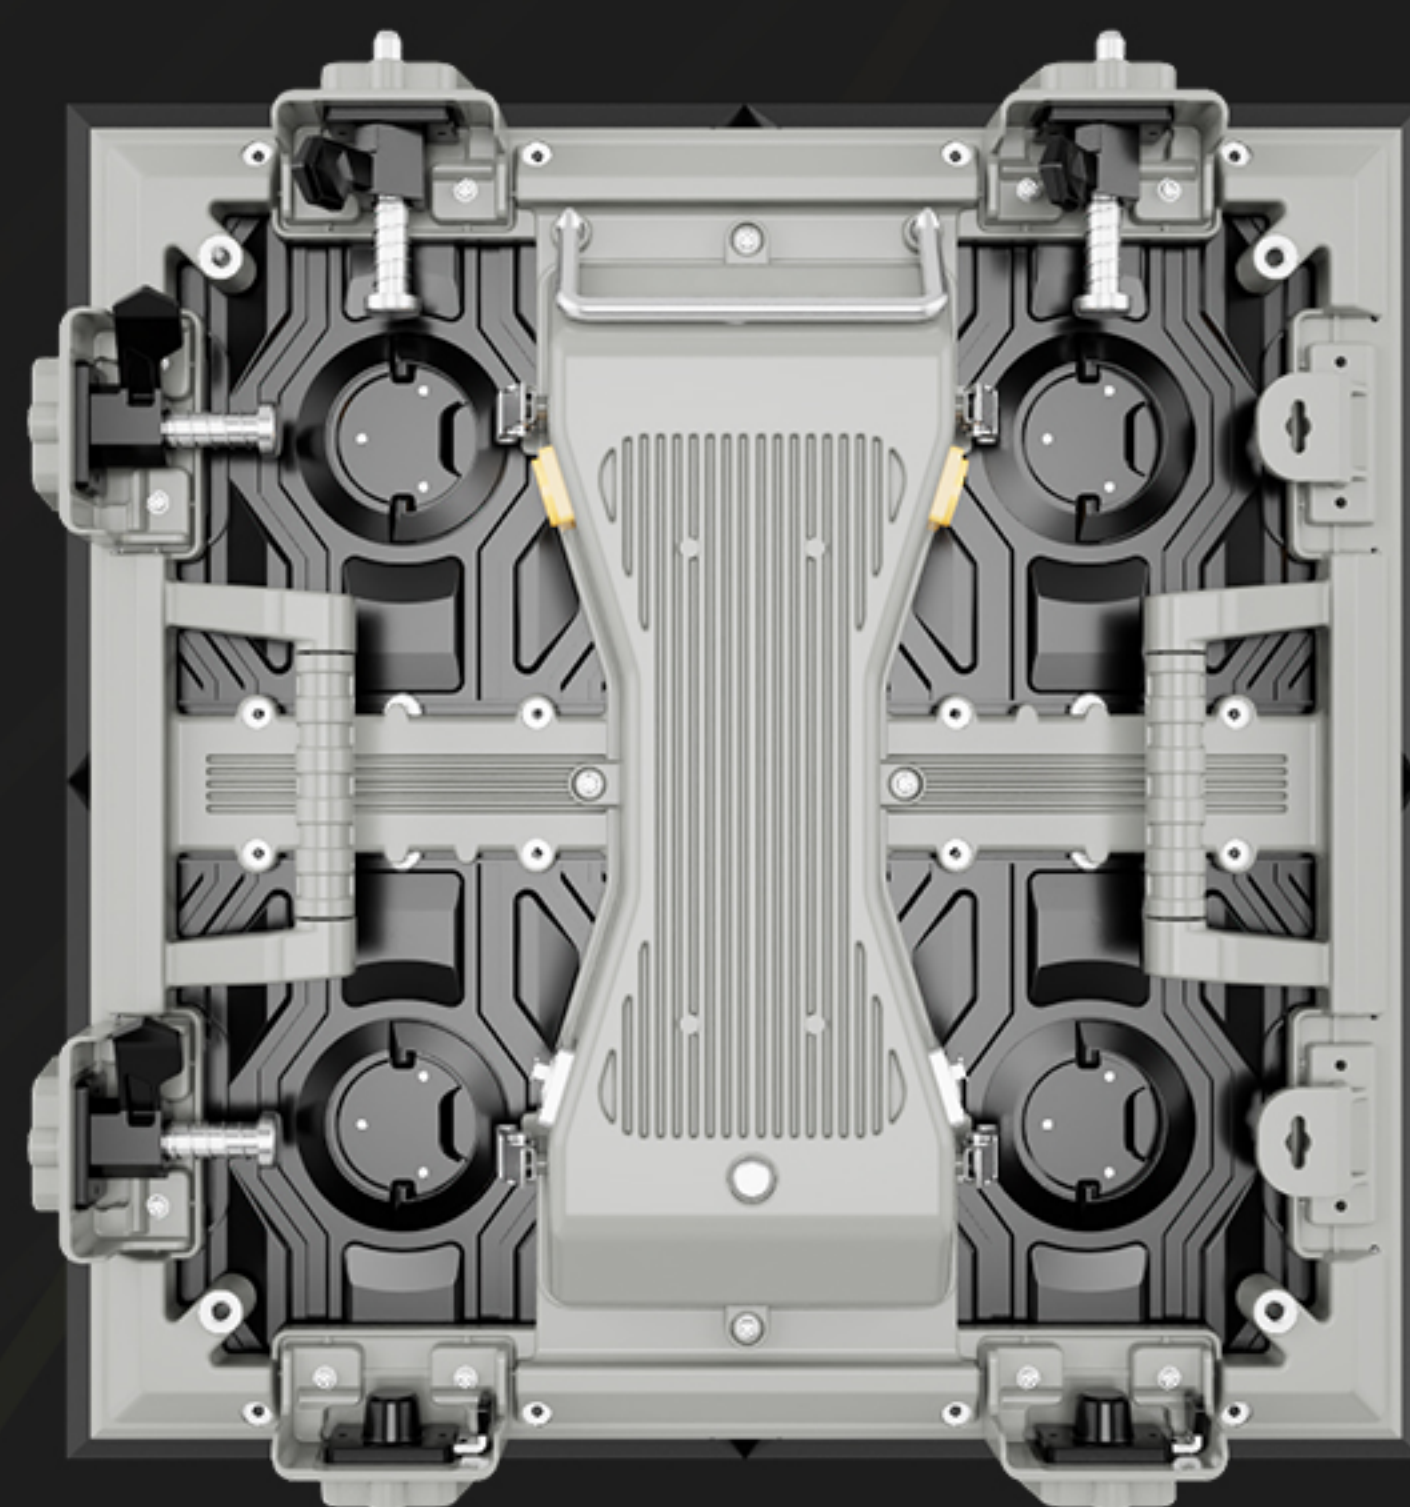

L*H: 500*500(mm)

Cabinet

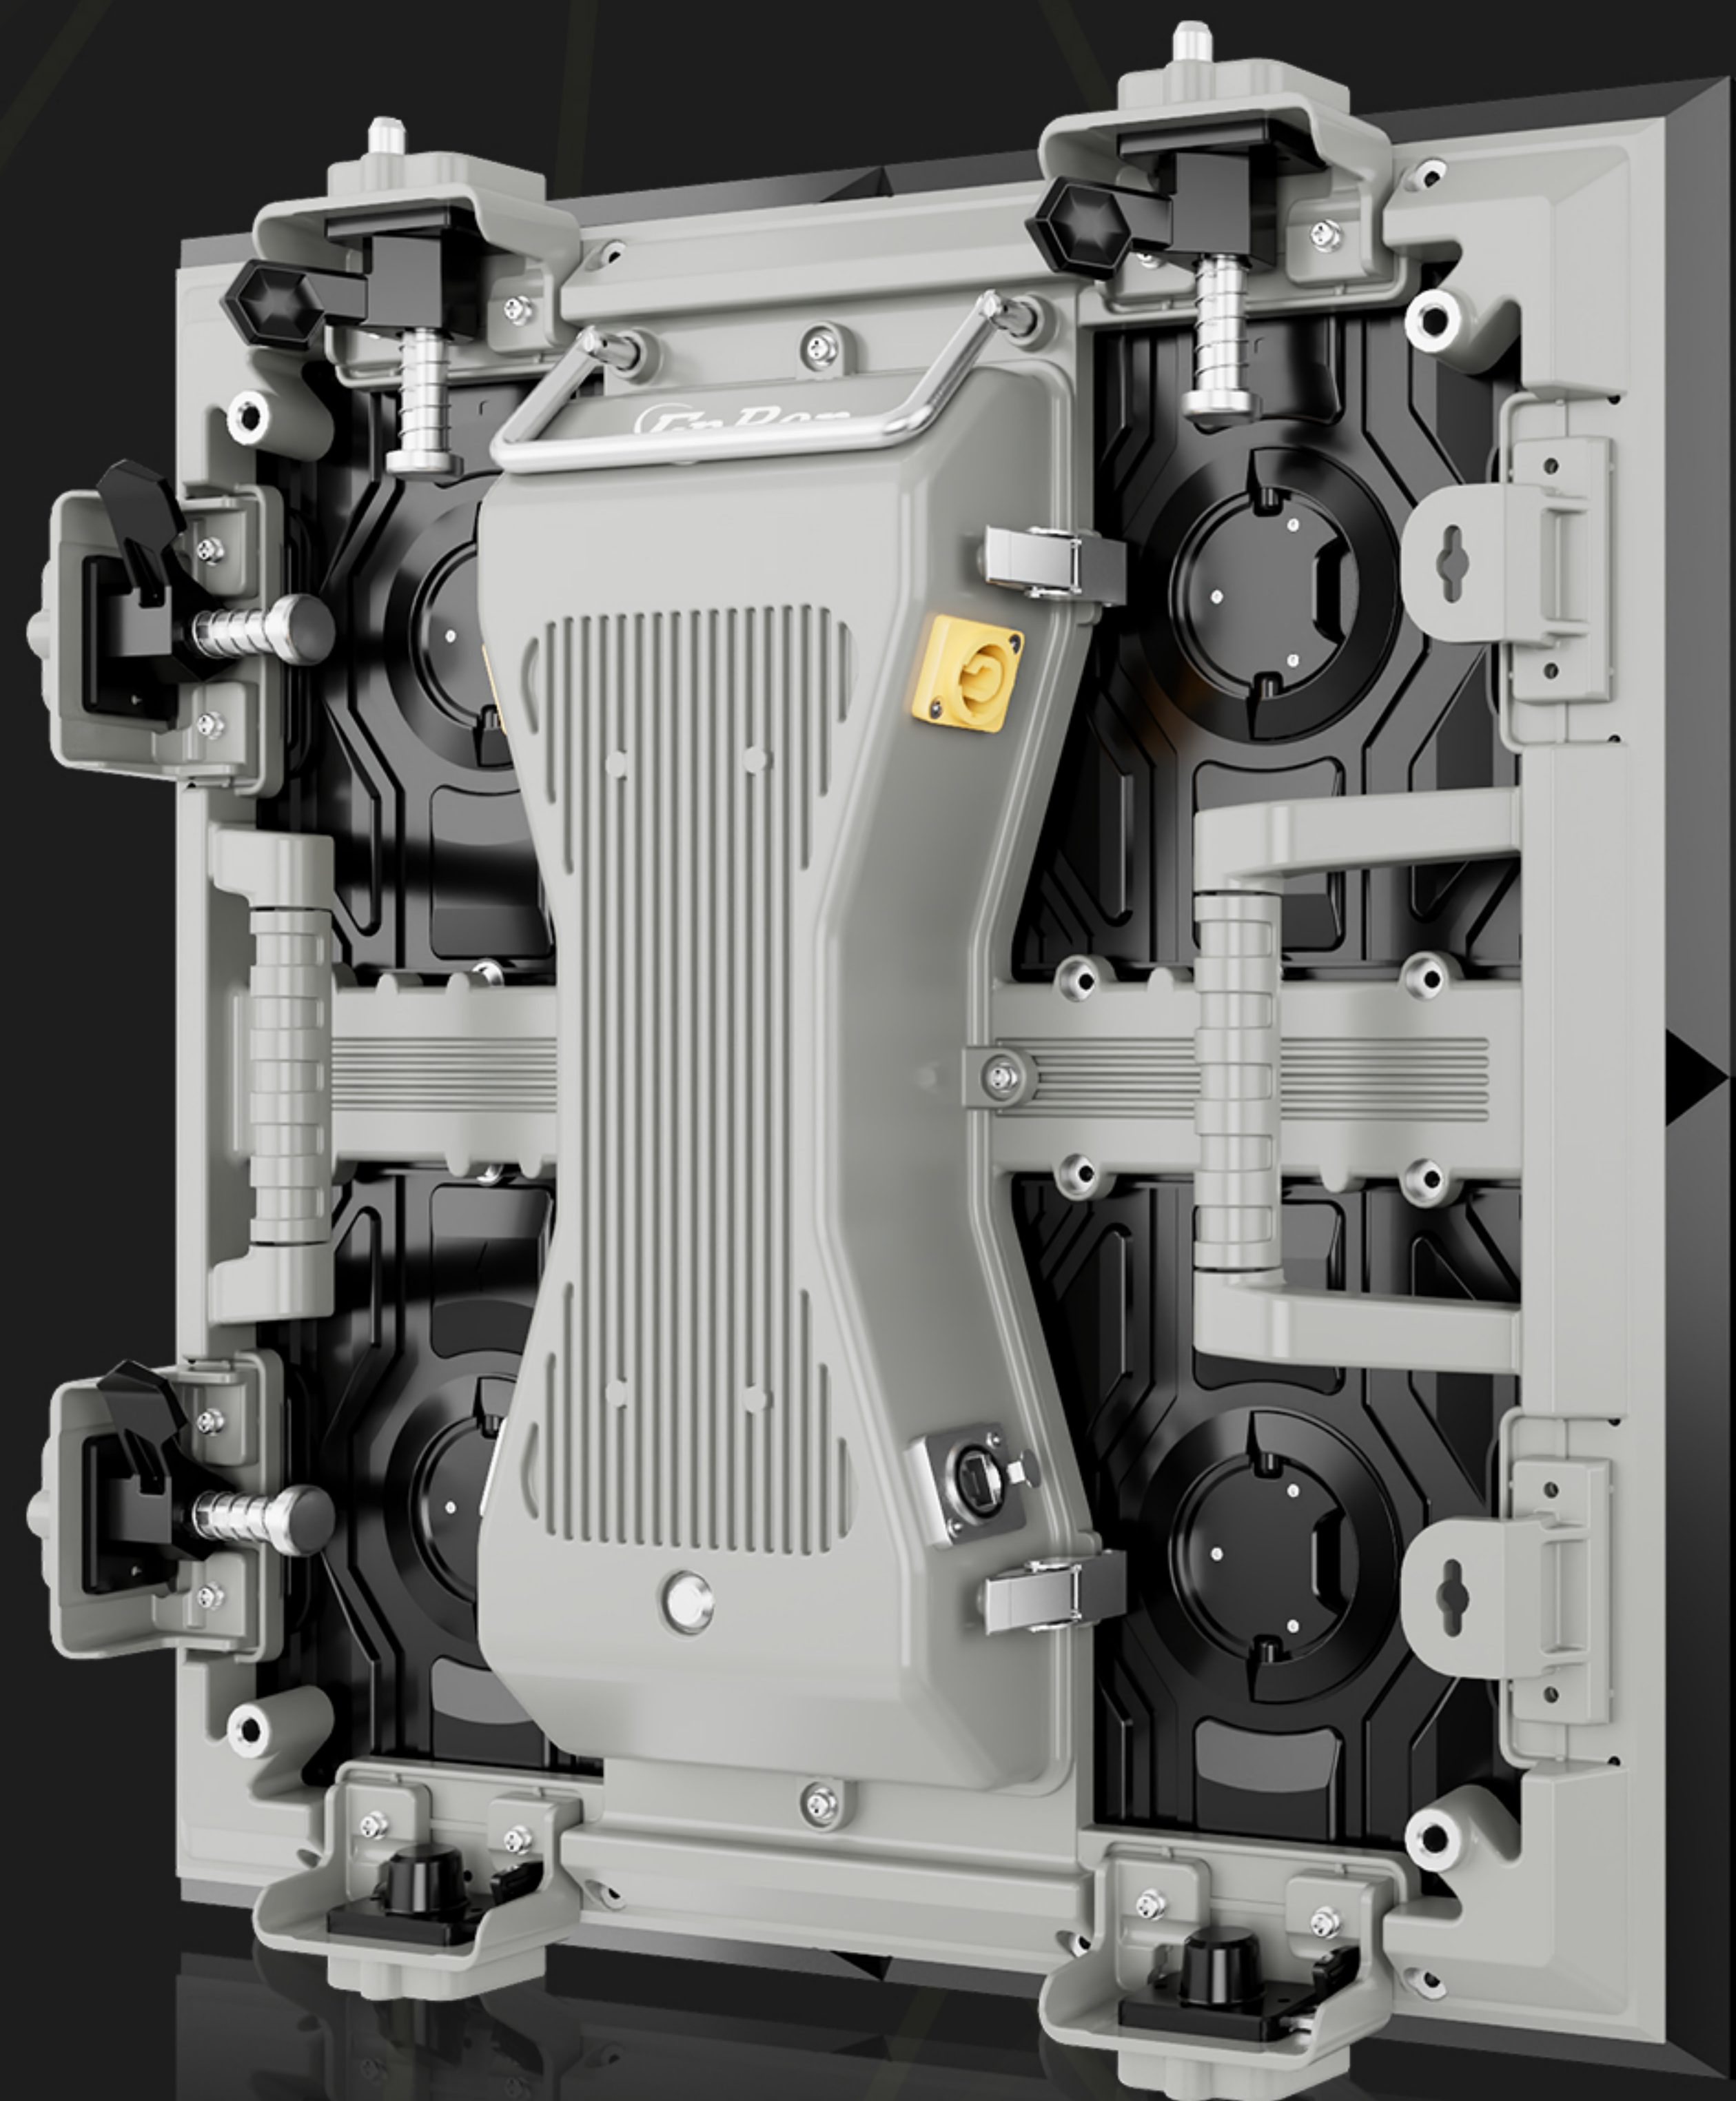

Weight 8kg

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Thinner Panels Lower Cost

6 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck

85mm
Panel Thickness



ENBON GROUP
Spirit & Success, **Together**



Enbon




Enbon **Led** Display




Multiple Angles, More Possibility

Provide a variety of splicing options to make your creativity unrestricted

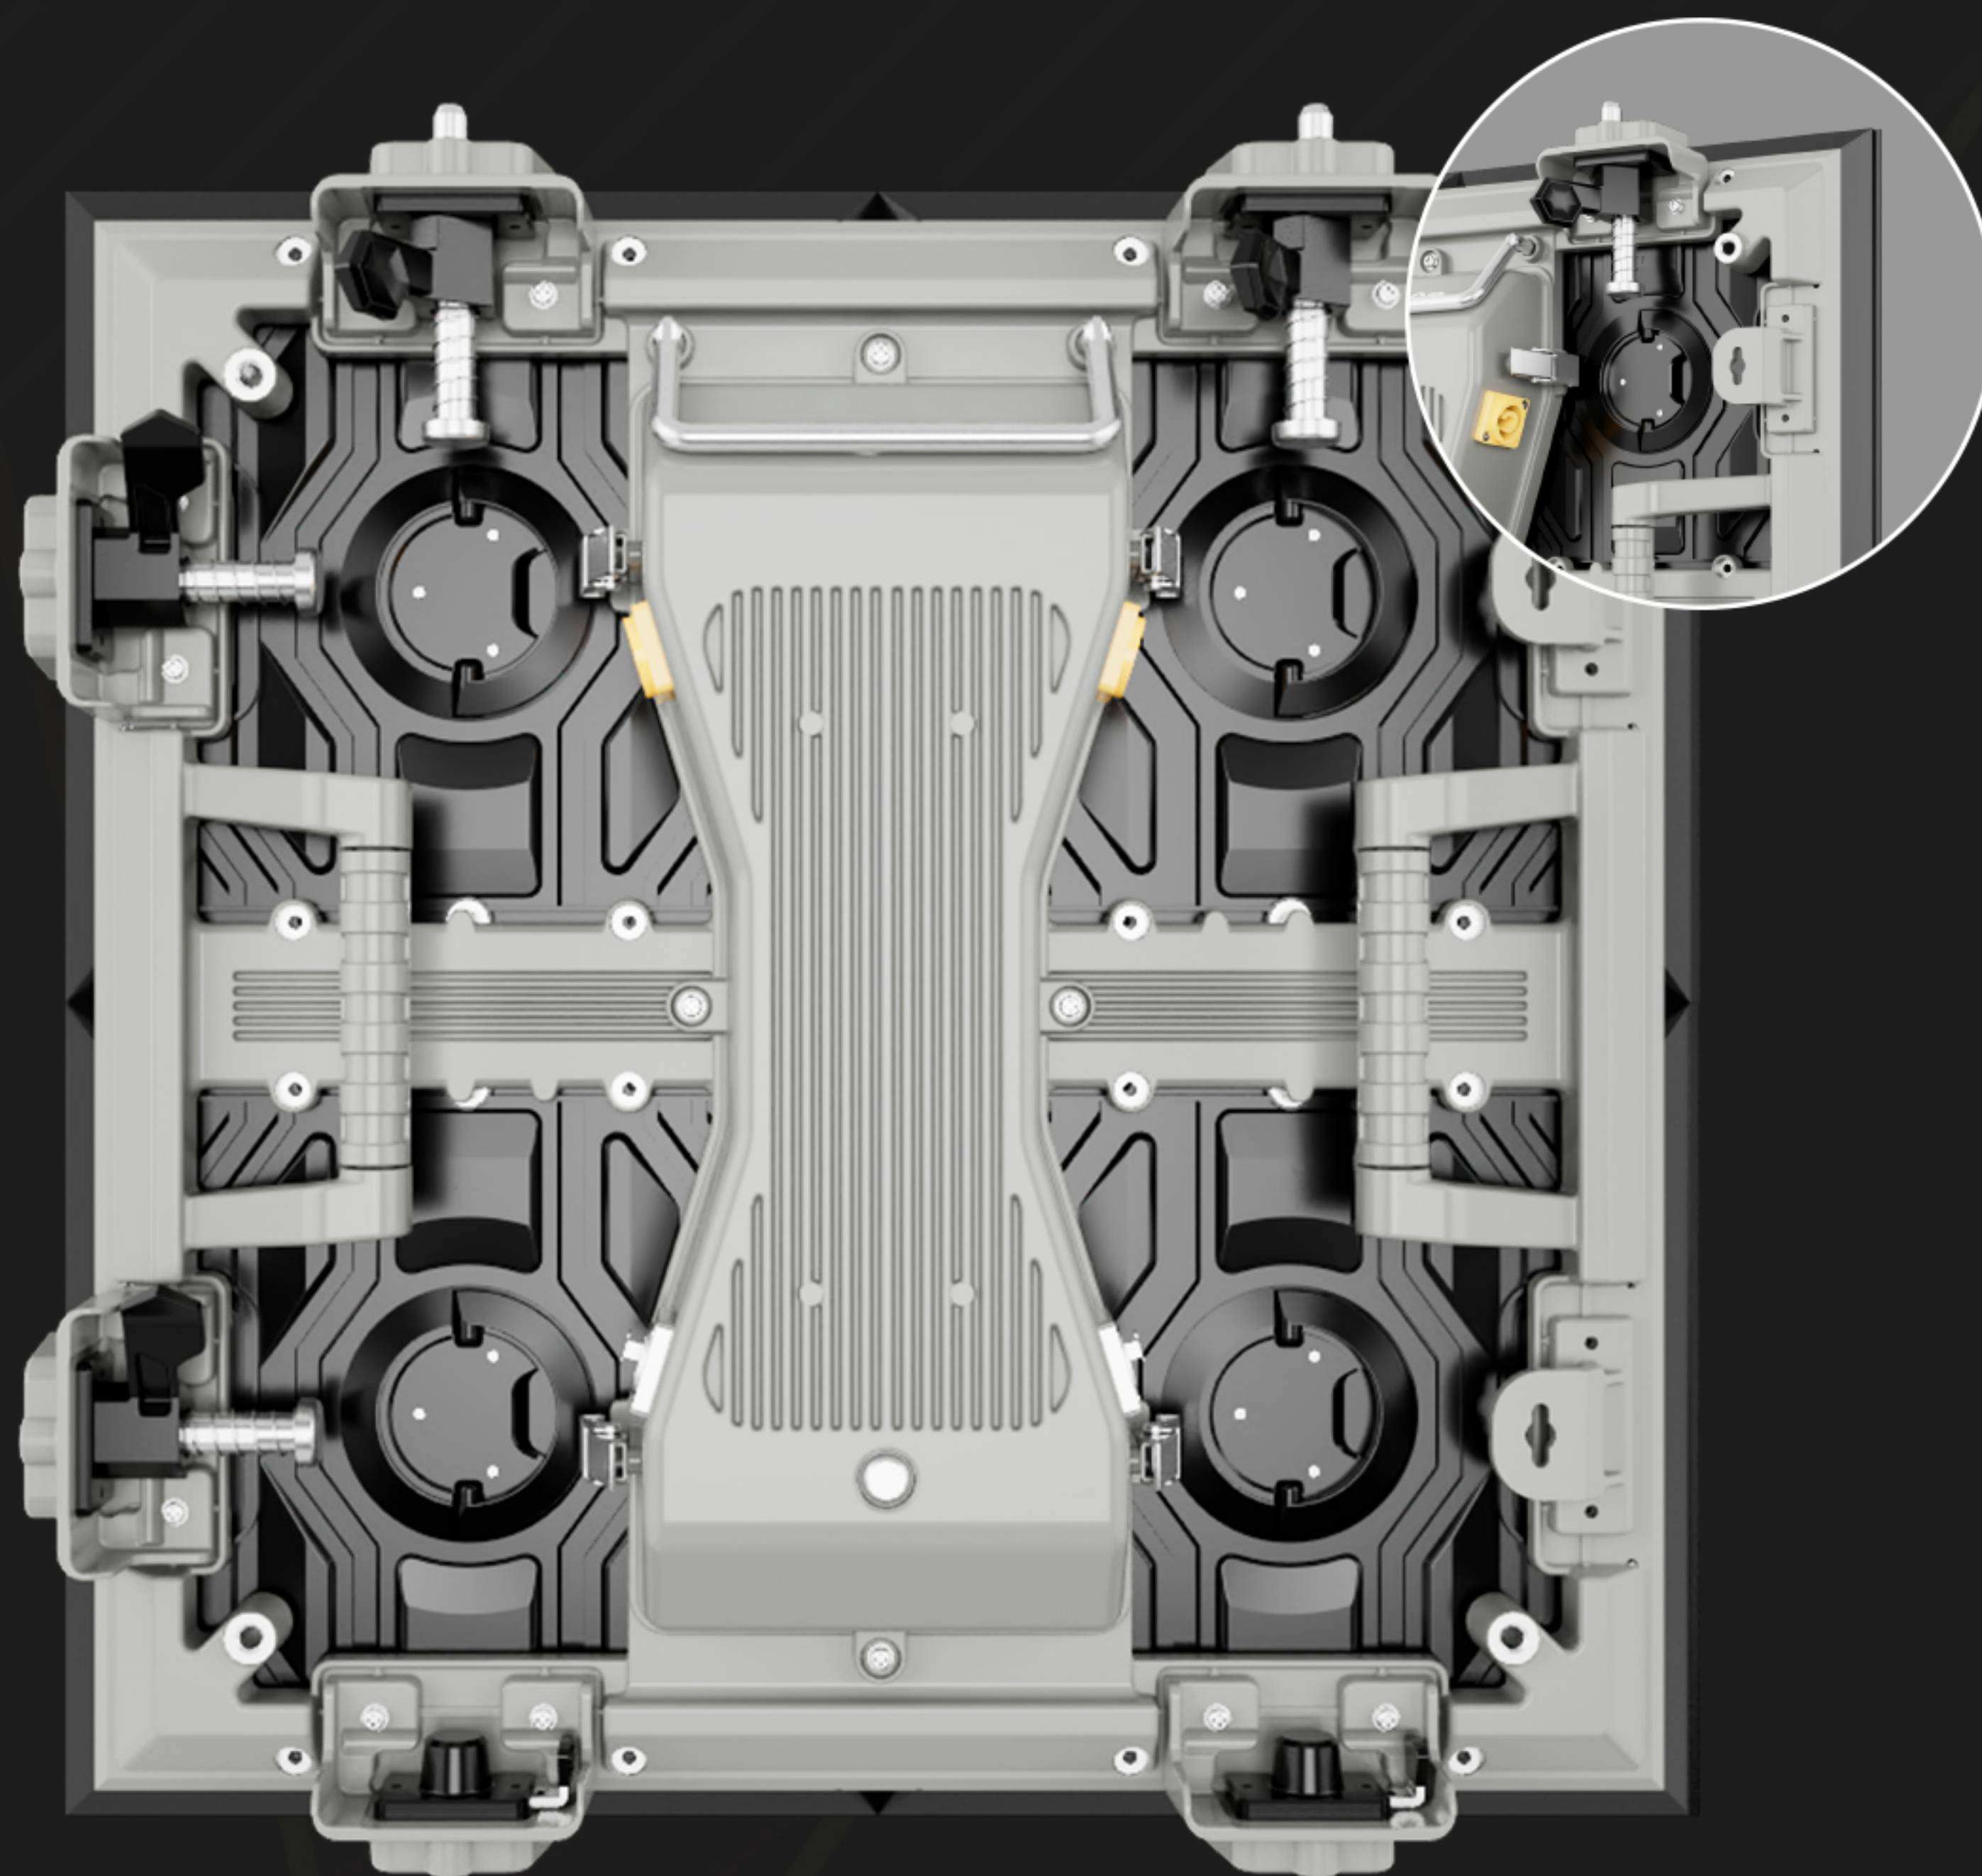

R5 Model
45° Oblique Angle

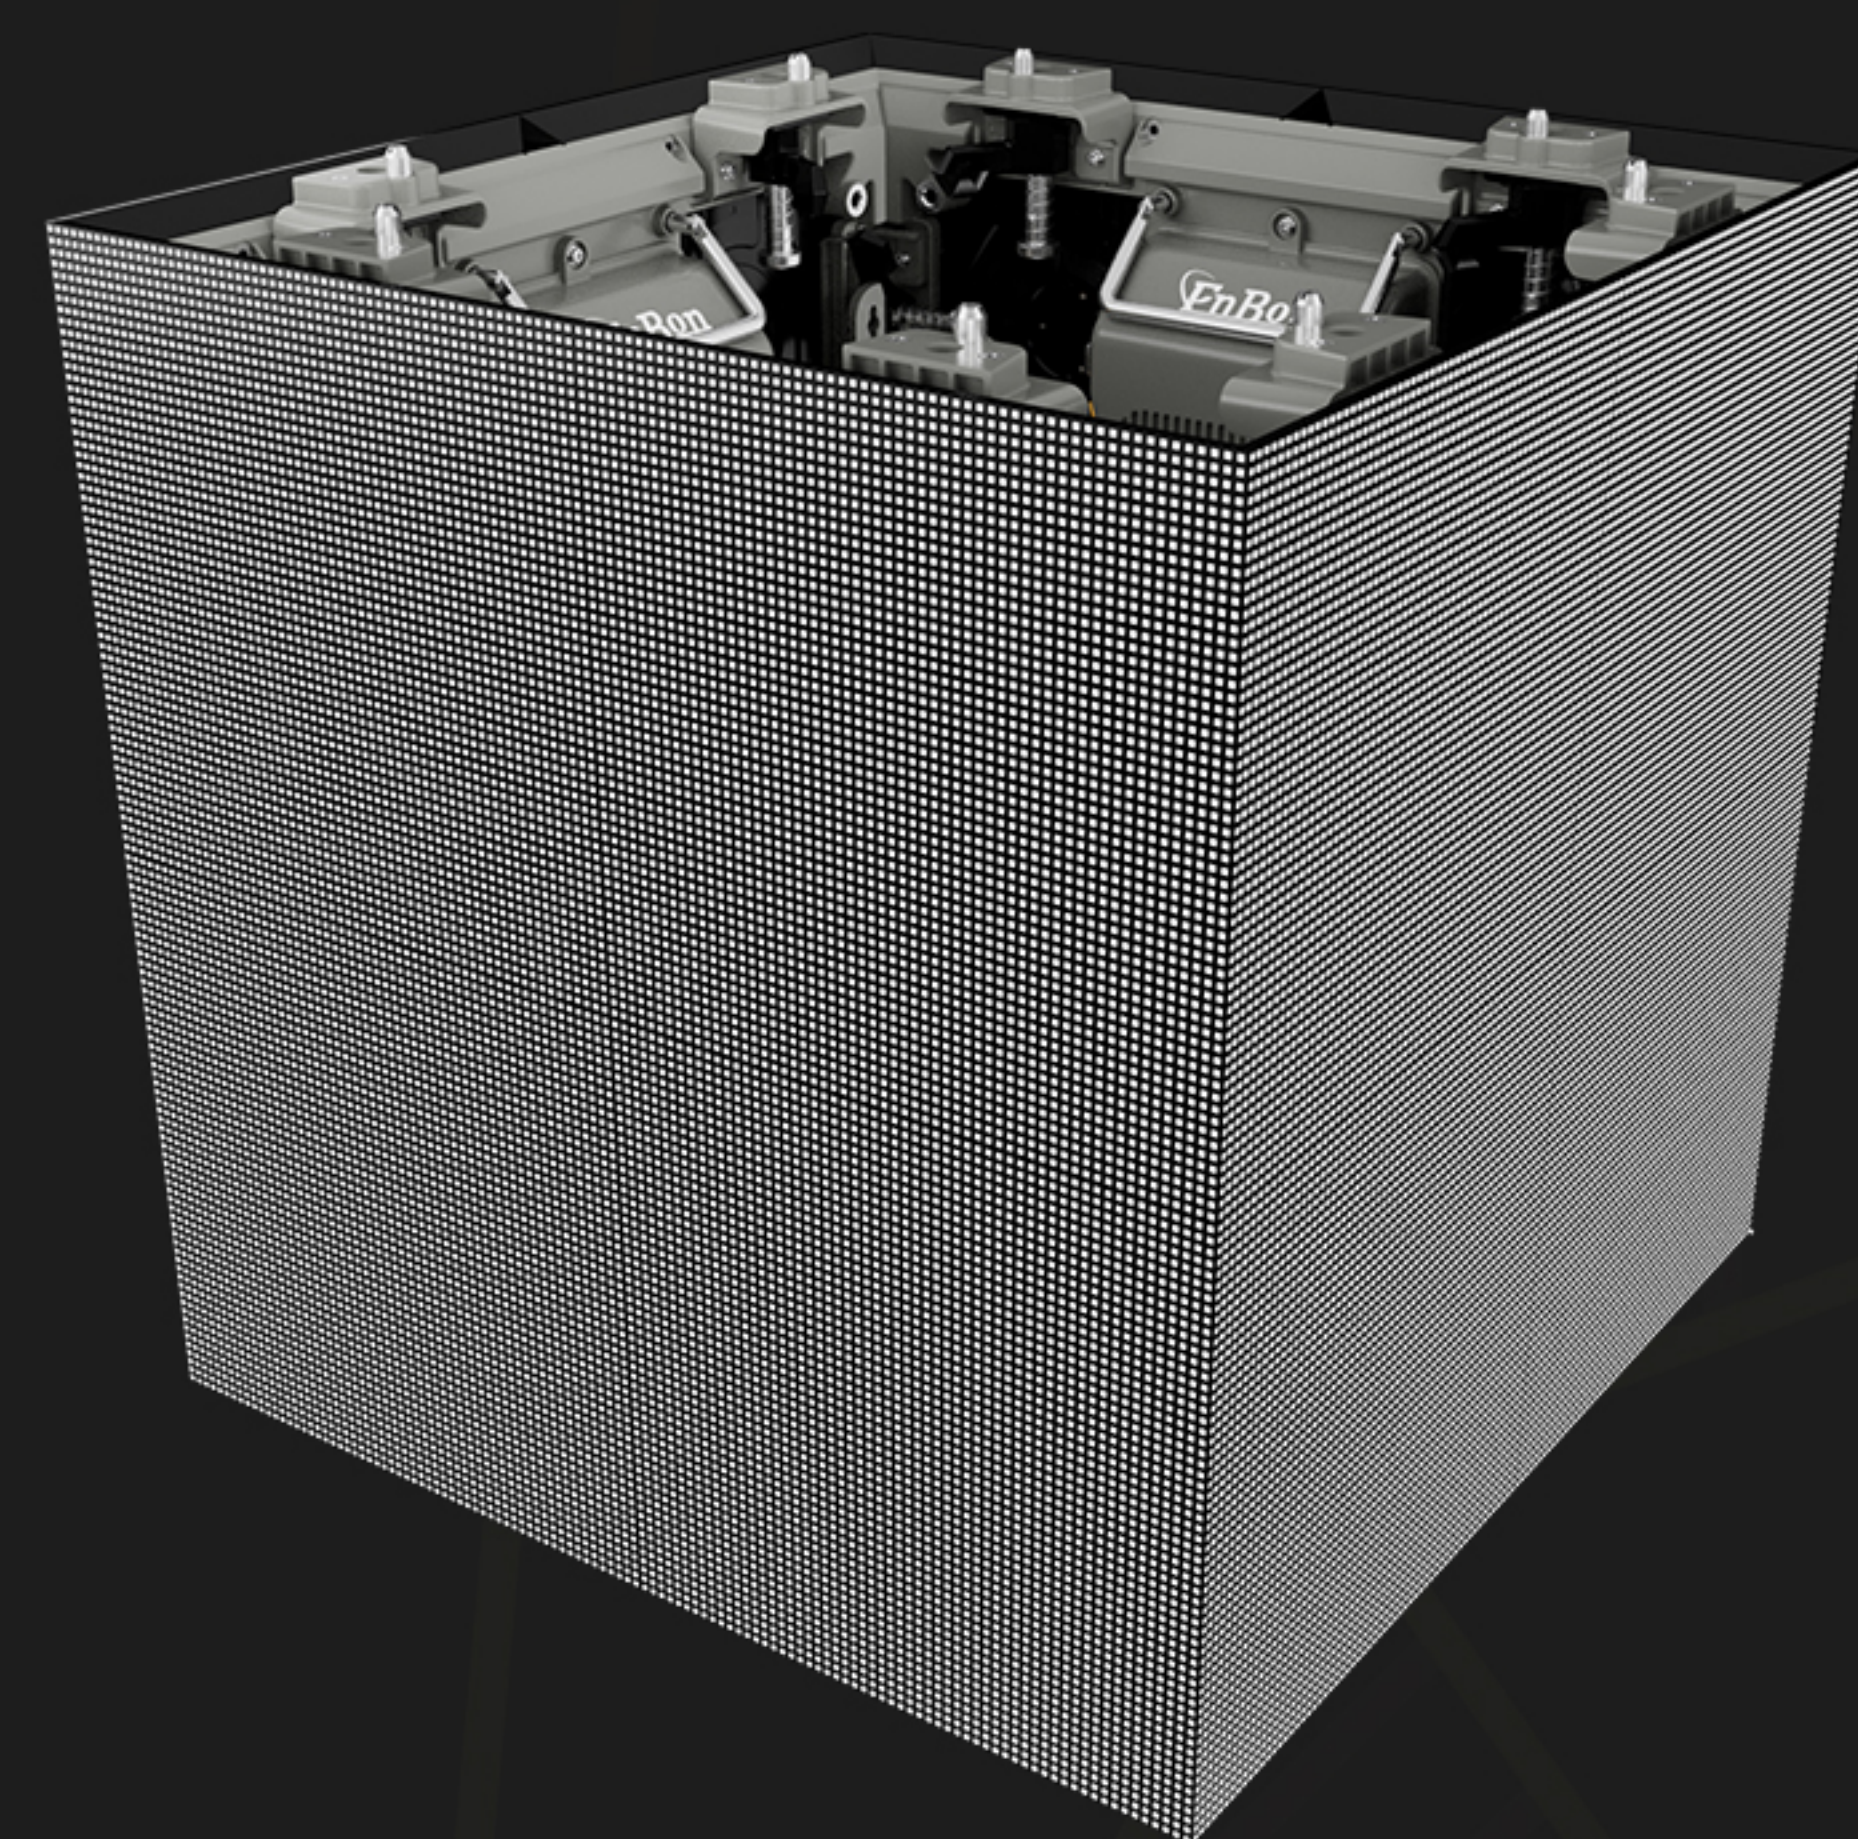

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display

EnBon

High Refresh Rate

High Grayscale




Low Refresh Rate



High Refresh Rate




Low Grayscale

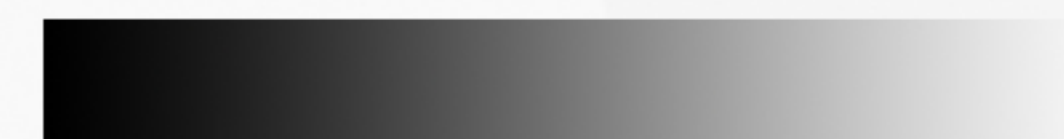

High Grayscale



Product Details

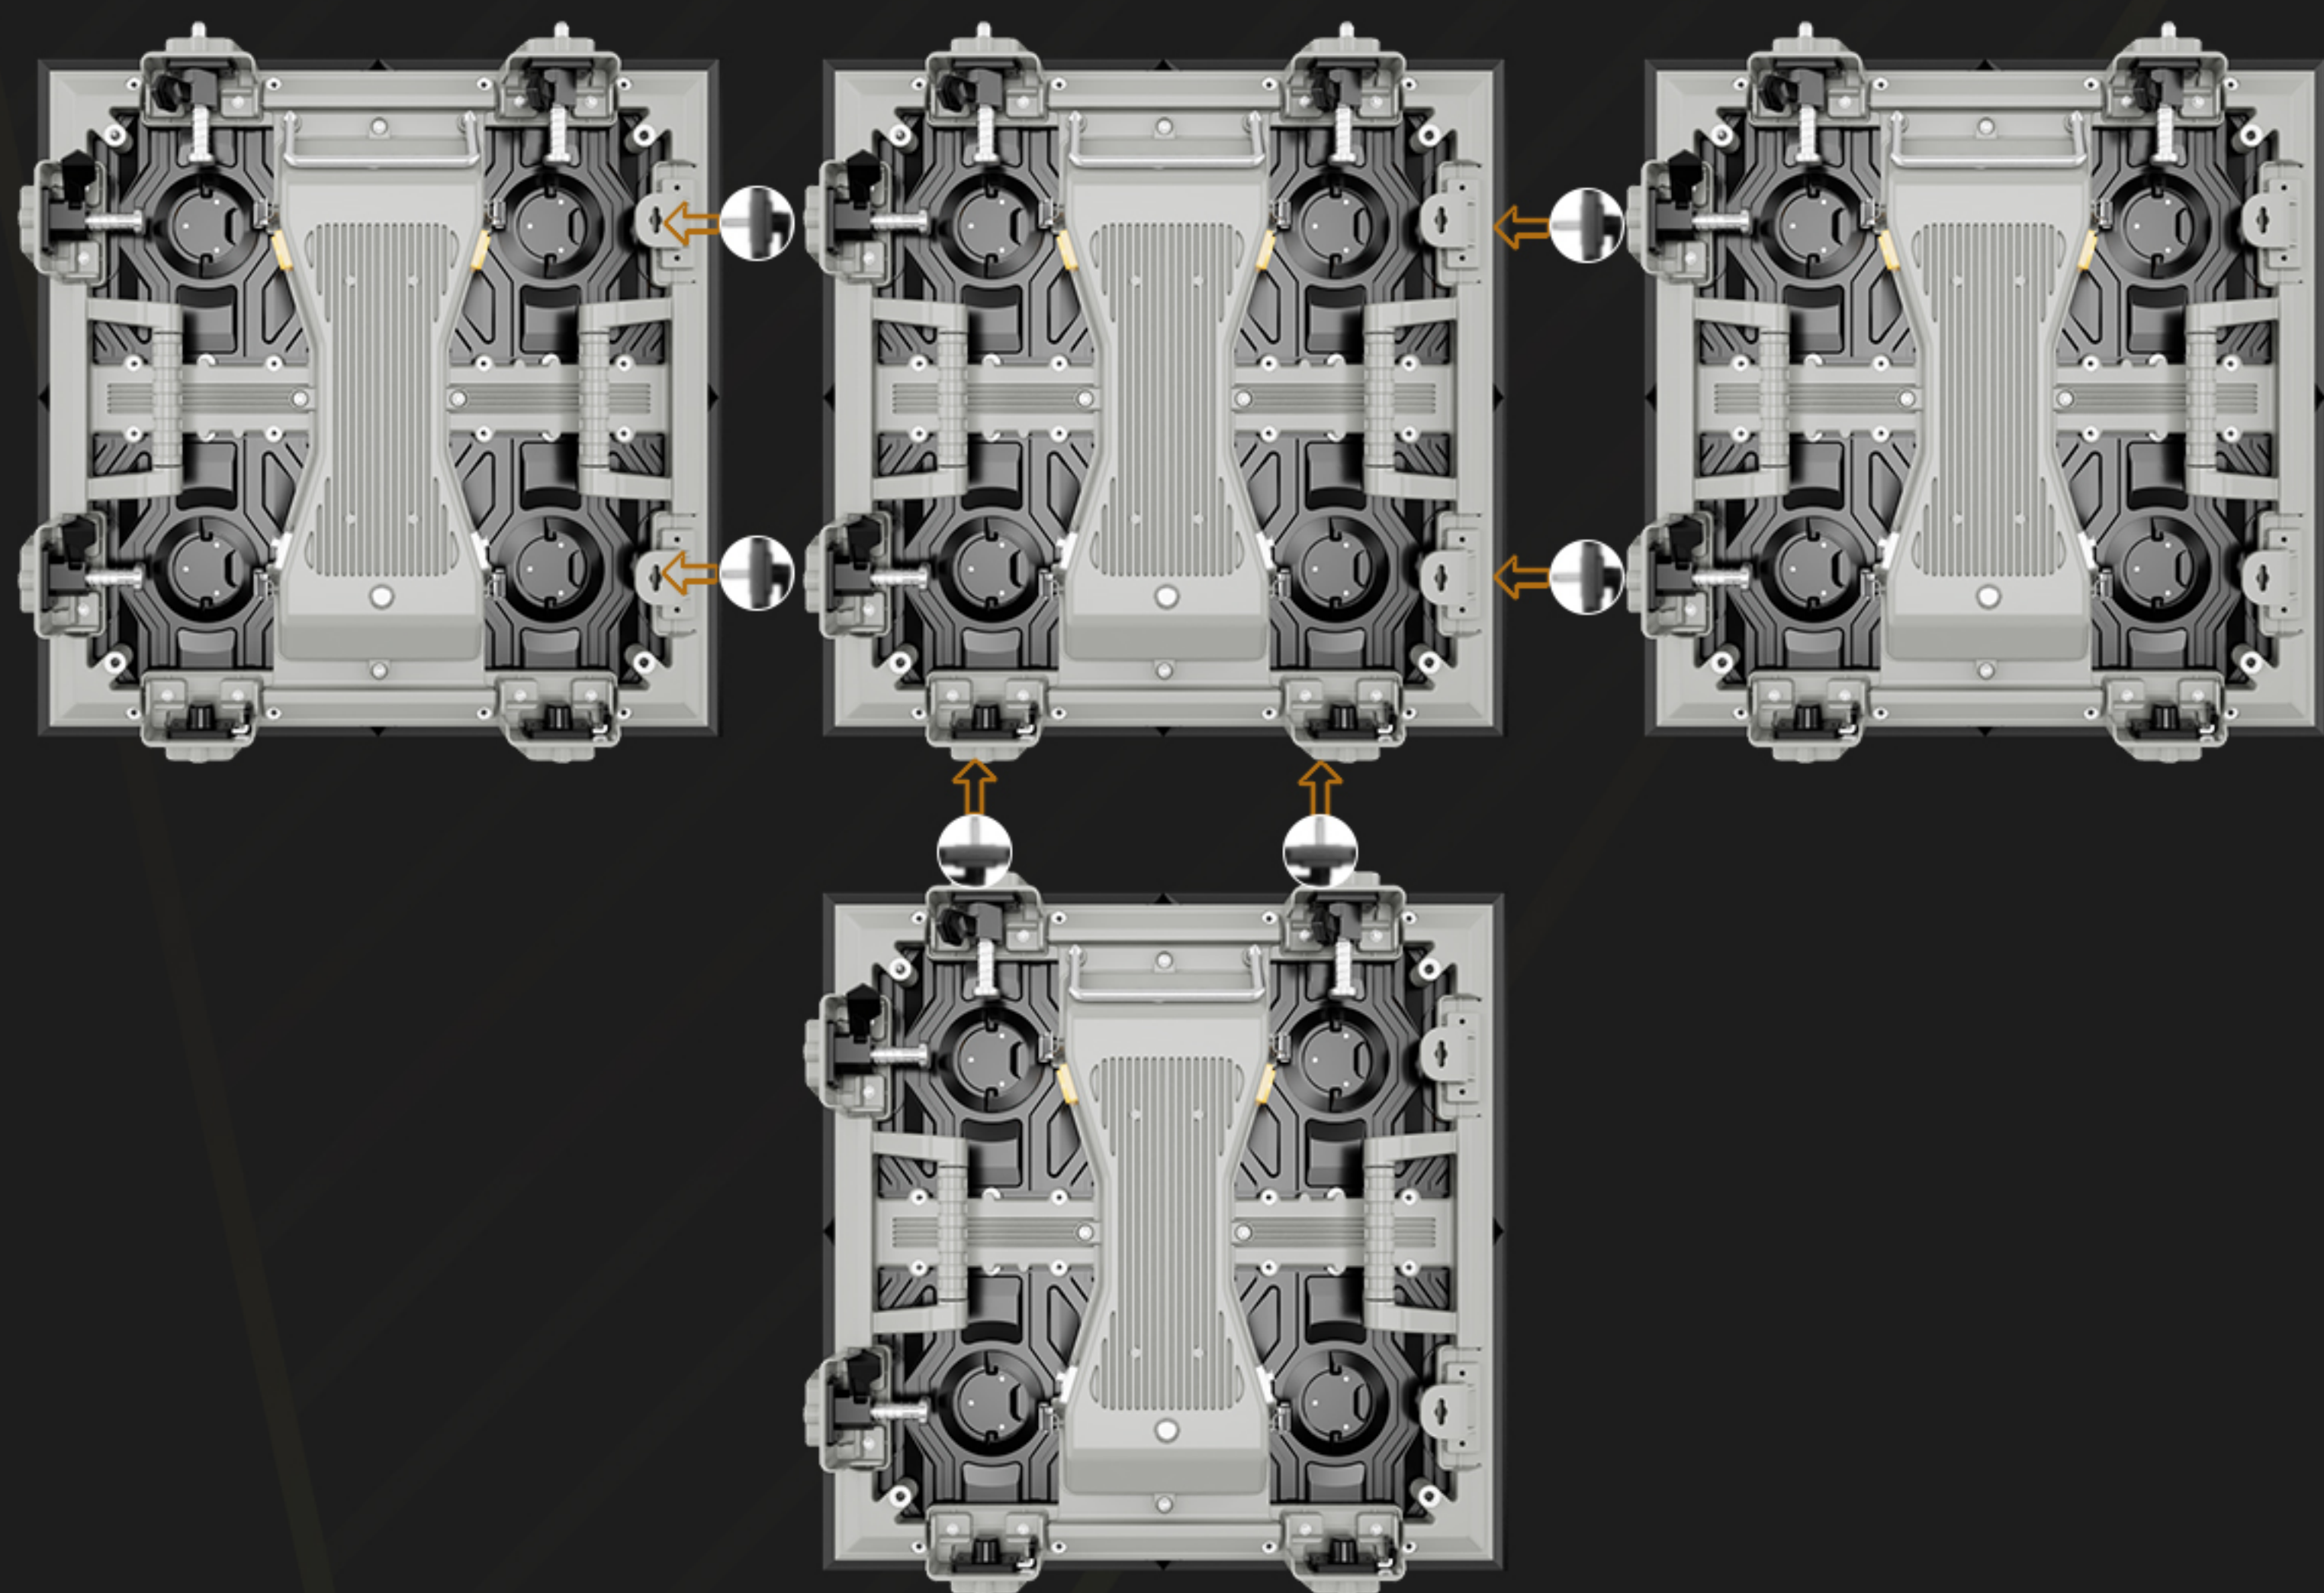

Can Do Seamless Splicing



Power Box



Fast Lock



Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation





Product Specification

Advanced locking system safety, Mechanism enables one-man installation

	Indoor	Outdoor
Pixel Pitch	3.91	2.604
LED Lamp	SMD2020	SMD1415
Density (dots/m2)	65536	147456
Brightness	≤800 nits	≥4000 nits
IP Rating	IP45	IP65
Cabinet Materiel	Die-casting Aluminum	Die-casting Aluminum
Refresh Rate(Hz)	3840 - 7680	3840 - 7680
Scan	16 scan	32 scan
Module Weight	0.5 kg	0.5 kg
Cabinet Weight	7.5kg	8 kg
Module Size (mm)	250*250	250*250
Cabinet Size (mm)	500*500*85	500*500*85
Module Pixel	64*64 dots	96*96 dots
Cabinet Pixel	128*128 dots	192*192 dots
Max Power	600 w/sqm	750 w/sqm
Average Power	360 w/sqm	450 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg	H140 (+70/-70) deg V140 (+70/-70) deg
Control Way	Synchronous / Asynchronous	Synchronous / Asynchronous
Gray Scale	16 bit	16 bit
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI
Work Humidity e	10% ~ 90%	10% ~ 90%
Work Temperatur	-20 ~ + 65°C	-20 ~ + 65°C

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display